



EMOS®

A brand of **legrand®**

Novelties Catalogue 2025



EMOS NEWS 2025

Innovation. Quality. Reliability.

„Every year, our experienced product managers carefully select the best new products that align with the latest trends and the evolving needs of the fast-changing market.

Thanks to their expertise and continuous pursuit of innovation, we bring you reliable, high-quality, and modern products that introduce new possibilities, greater comfort, and enhanced reliability into everyday life.“

Making Life Easy



A brand of **legrand**

Making Life Easy

We are EMOS – a Czech company with an international reach, providing high-quality electrical goods for both household and professional use. With over 30 years of experience in the market, we have become synonymous with reliability, innovation, and customer satisfaction.



You can find our products in more than 26 countries across Europe, where we collaborate with the largest retail and wholesale chains as well as specialized dealers. Thanks to our in-house testing and strong focus on quality, we deliver solutions that customers appreciate every day.



Direct distributor
for the Czech Republic,
Slovakia, Hungary, Slovenia,
Croatia, and Poland.

www.emos.eu

EMOS basic philosophy



OPTIMAL PRICE/ QUALITY RATIO OF PRODUCTS

Each product is subject to strict quality control by a team of inspection staff directly at the manufacturer's site and our laboratory. We carry out nearly 1,100 tests a year, supervised by 25 specialists.



24-HOUR STOCK AVAILABILITY

We offer excellent stock availability of our products and fast delivery to our customers. A total storage area of over 16,000 m² allows us to keep more than 95% of the items in our range in stock and in sufficient inventory.



SPEED AND EASE OF COMMUNICATION

Customers communicate with us in the way that suits them best - through sales representatives, online B2B and B2C portals or by phone. 90 EMOS Group sales representatives visit an average of 650 customers per day.

About the multinational Legrand Group

Legrand is a global electrical and digital infrastructure specialist, offering high-value-added products and solutions that improve lives by transforming the spaces where people live, work, and meet. The Legrand Group employs more than 38,200 people in nearly 90 countries and works to improve buildings' electrical and digital infrastructures, helping to digitize them and reduce their carbon footprint. Legrand has solutions for all building types - residential buildings, data centers, other non-residential buildings, industrial spaces, and infrastructures. The Group's technological expertise, leadership position, the breadth and diversity of its offerings, its international presence, and the strength of its brands combine to make Legrand a global leader.

[#LegrandImprovingLives](https://www.legrandgroup.com)

www.legrandgroup.com

[@legrand](https://twitter.com/legrand)

EMOS dealership

CZECH REPUBLIC

Headquarters and logistics centre

EMOS spol. s r.o.
Lipnická 2844
750 02 Přerov

ID No.: 19014104
tax ID No.: CZ19014104
bank account number: 296149831/0100
e-mail: emos@emos.cz

contact person: +420 581 261 111
customer centre B2B: +420 581 261 270
customer centre B2C: +420 581 261 233
sales fax: +420 581 701 332

warehouse: +420 581 261 160 / 290 / 293
complaints: +420 581 261 281
GPS: 49.467587°N, 17.448671°E

Office Prague

EMOS spol. s r.o.
PB Park, Průmyslová 1306/7
102 00 Praha 10 – Hostivař



SLOVAK REPUBLIC

EMOS SK s.r.o.
Hlinická 409/22
014 01 Bytča

ID No.: 36392961
VAT No.: SK2020104834
e-mail: info@emos.sk

Sales department: +421 41 50 916 14
+421 902 96 69 96
Secretariat: +421 41 509 16 11

POLAND

EMOS PL Sp. z o.o.
ul. Gałczyńskiego 6
43-300 Bielsko-Biała

tel.: +48 33 816 92 42
e-mail: biuro@emos.pl

SLOVENIA

EMOS SI, d.o.o.
Rimska cesta 92
3311 Šempeter v Savinjski dolini


tel.: +386 8 205 17 20
e-mail: narocila@emos-si.si

**Croatia | Bosnia and Herzegovina |
Serbia | Montenegro | North Macedonia**
Sašo Marinšek
Managing Director EMOS SI, d.o.o.
GSM: +386 31 517 364
e-mail: saso.marinsek@emos-si.si

HUNGARY

EMOS HU Kft.
Budaörs Office Park, A épület
2040 Budaörs, Szabadság út 117.

tel.: +36 70 398 5891
fax: +36 23 41 42 99
e-mail: info@emos.hu



Albania | Belgium | Bosnia and Herzegovina | Bulgaria | Montenegro | Denmark | Estonia | Finland | France | Croatia
| Italy | Latvia | Lithuania | Cyprus | Hungary | Moldova | Germany | Netherlands | Poland | Portugal | Austria |
Romania | Greece | North Macedonia | Slovakia | Slovenia | Serbia | Spain | Sweden | Ukraine

EXPORT

Export departement

**Sweden | Spain | Portugal |
France | Greece | Netherlands |
Italy | Denmark | Belgium**

Ladislav Novak
Export Manager

phone: +420 581 261 207
GSM: +420 724 597 640
e-mail: ladislav.novak@emos.cz

Latvia | Estonia | Lithuania | Finland

Raman Sinevich
Country Manager
Baltic countries

GSM: +371 295 901 79
e-mail: raman.sinevich@legrand-ext.com

Germany | Austria | Switzerland

Nikita Maurer
Country Manager
GMS: +49 151 72161689
E-mail: nikita.maurer@legrand.com

**Romania | Bulgaria | Republic
of Moldova | Albania**

Cseh Szabolcs
Country Manager
Baltic countries
GSM: +40 745 536 783
e-mail: szabolcs.cseh@legrand-ext.com



The Eurologistics Centre of EMOS Holding, with an area of over 16,000 m², supports EMOS' strategy to offer its business partners excellent stock availability of products from its range.

EMOS GoSmart

Smart living is even more affordable

Create your own smart home with EMOS GoSmart smart devices and others compatible with the TUYA platform. Connect individual products, set up automate their activities and control them remotely with the fully localized and intuitive mobile app.




SECURITY HOME

- Indoor IP cameras
- Outdoor IP cameras
- Video door phones
- Video doorbells
- Wireless doorbell
- Sensors
- Access control systems



MEASUREMENT AND REGULATION

- Thermostats
- Weather stations and thermometers
- Control valves
- Air quality



ELECTRICAL INSTALLATIONS AND CONTROLS

- Scenic controls
- Smart hubs
- Extension leads
- Sockets
- Modules



LUMINAIRES AND LIGHTING SOURCES

- Light bulbs
- LED Strips
- Luminaires
- Christmas lights
- Floodlights
- Garden lighting
- Ambient lighting



HOME AND GARDEN

- Scales
- Pet care
- Irrigation systems



EMOS GoSmart



EMOS GoSmart
is here to make your
life more pleasant,
safe and convenient.



www.emosgosmart.eu

EMOS GoSmart products

Optimum price/quality ratio

With the affordable prices and excellent quality of EMOS GoSmart products, the smart home system becomes accessible to everyone. You can easily create your smart home with them without complicated renovation and installation of equipment.



WIDE RANGE

Dozens of EMOS GoSmart products are developed together with the world's leading manufacturers industry leaders.



OPTIMAL PRICE AND QUALITY

EMOS GoSmart products are subject to quality control directly at the manufacturer and in our laboratory.



THE ONLY MOBILE APP

The EMOS GoSmart app allows you to control your device via your mobile device from anywhere.



TECHNICAL SUPPORT

We will provide you with technical support and help you get your EMOS GoSmart products up and running.




COMPATIBILITY AND EXPANDABILITY

Expand your smart home with EMOS GoSmart products and thousands of other TUYA-compatible products.



Advanced technology

EMOS GoSmart products communicate over a Wi-Fi network, Bluetooth or ZigBee communication protocols. You can even use voice control with their compatibility with Amazon Alexa and Google Assistant.

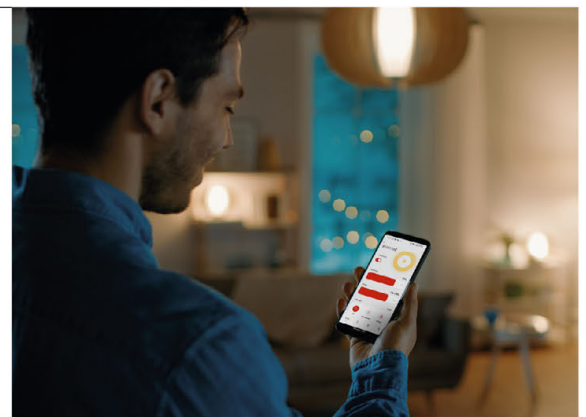


Data security and compatibility

System priorities EMOS GoSmart

The foundation of the EMOS GoSmart system is the TUYA global platform. This platform meets the most demanding security requirements and, using encrypted communication, allows the individual devices in a smart home to be connected while maintaining compatibility and ease of use.

Renowned brands that have chosen the TUYA platform for their smart devices include HAMA, LIDL, LEDVANCE, PHILIPS and many others.

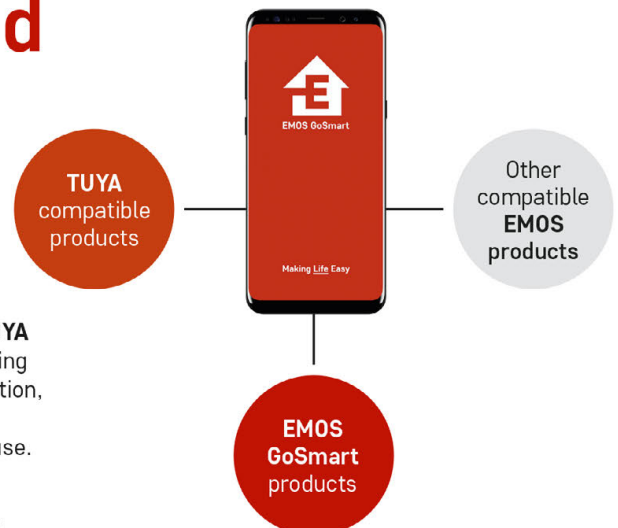

EMOS GoSmart app

Full localisation and ease of use

The **EMOS GoSmart app** makes it easy to control all your smart home devices via your **Android or iOS** mobile phone or tablet. Thanks to the perfect localisation, you can communicate with it in your native language.




Smart control of your home




Control multiple device



Instant connection from anywhere

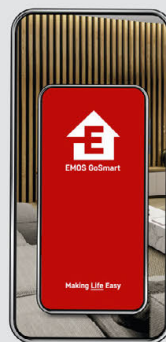

Create and use intelligent scenerios

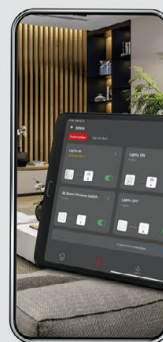

Share with your family in one tap



Without complicated settings, the **EMOS GoSmart app** gives you an up-to-date overview of what's happening in your home and lets you conveniently control all your smart devices remotely.



FULL LOCALISATION

With full localisation, you'll be up and running with the app. You can communicate in your native language.



EASY TO USE

You don't have to worry about complicated app control. Anyone can use it



SMART SCENARIOS

Let your products work together with smart scenarios.



DEVICE MANAGEMENT

All smart home devices can be controlled with the app from anywhere.



SMART ALERTS

The app alerts you to what's happening in your home with notifications.

Let your household take care of itself and give yourself more time for your loved ones and interests.

Batteries	12	PROFI	61
GP Batteries	12	NESSI	61
GP Consumer batteries	12	ORSU	62
GP Alkaline	12	Garden Lighting	63
GP Alkaline	12	EXCLUSIVE	63
GP Consumer batteries	14	Garden Lighting GoSmart	63
GP Lithium button	14	CLASSIC	64
GP Special alkaline	15	BRIXO	64
GP Alkaline button	16	SOLO	65
GP Rechargeable	16	SPILO	66
GP ReCyko	16	SUNNO	66
GP Recharge	17	LUNIS	67
Battery chargers, powerbanks, USB chargers	18	SALVIA	67
Battery chargers	18	ARTEO	68
GP Battery chargers	18	ADENIA	69
Powerbanks	19	ZALA	70
GP Powerbanks	19	NIKA	71
EMOS Powerbanks	20	OCULUS	72
USB chargers	22	CASSIA	72
Portable Lighting	25	MALVA	73
GP	25	TILLIA	73
Flashlights	25	TERION	74
GP Discovery	25	VEREA	75
EMOS	26	LANA	75
LED Metal Flashlights	26	ESSENTIAL	77
EMOS Flashlights	26	LUMI	77
EMOS	27	Luminaires	78
LED Plastic Flashlights	27	Desk and Floor Lamps	78
LED Work Lights	28	LED strips	81
LED Rechargeable Work Lights	28	LED strips GoSmart	81
EMOS	29	Luminaires	82
LED Rechargeable flashlights EXPERT	29	Ambient Lighting GoSmart	82
LED Night Lights	30	Batten luminaires	85
LED Battery Night Lights	30	PROFI PLUS	85
LED 230 V Night Lights	31	PANO	85
Night lights GoSmart	31	ESSENTIAL	86
EMOS	32	MINO	86
LED Flashlights display box	32	Decorations	87
LED Keychains display box	33	Classic chains	87
Lighting	34	Classic chains with multifunction	87
Light sources	34	Cherry chains	90
LED bulbs	34	Cherry chains with multifunction	90
Filament	34	Decorations	92
Classic	37	Garlands	92
Basic	39	Svicny	93
Deco	42	Paper and cotton decorations	93
LED tubes, tubes	45	LED trees	94
BASIC	45	LED candles	95
Light sources	47	Other decorations	95
Car-light bulbs	47	Weather stations, thermometers, scales, others	98
Luminaires	49	Weather stations	98
Dustproofs	49	Weather stations	98
ESSENTIAL	49	Weather stations GoSmart	99
DUSTY	49	Thermometers	100
Floodlights	50	Thermometers	100
CLASSIC	50	Pet care GoSmart	101
TAMBO	50	Pet Care	102
VISIO	52	TV and audio accessories	104
ESSENTIAL	54	Multimedia players, radios	104
GLARO	54	Universal remote controllers OFA	105
LED Panels	58	Power supply extension cords, cable reels, plugs, accessories	106
PROFI	58	Power supply extension cords and sockets	106
BAXXO	58	FRENCH	106
Surface Luminaires	59	MOES Extension cords	106
PROFI	59	1-phase 16A with PVC insulation	106
TIVI	59	Extension Cords GoSmart	108
Recessed Luminaires	60	Single socket extension cords	108
PROFI	60	Two-cores PVC	108
LORI	60	SCHUKO	109
Emergency Luminaires	61	MOES Extension cords	109

1-phase 16A with PVC insulation	109
Extension Cords GoSmart	110
Surge protectors	110
Surge protectors EMOS FRENCH	110
Surge protectors EMOS SCHUKO	112
Cable reels	114
FRENCH	114
1-phase rubber	114
1-phase PVC	114
SCHUKO	115
1-phase rubber	115
Sockets, plugs, adaptors, timers, others	116
Adaptors	116
Timers	117
Cables	118
Data cables UTP, FTP	118
Data cables CAT 5E	118
Data cables CAT 6	120
Smartphone cables	121
Videophones, doorbells	122
Home videophones, sets	122
Home videophones	122
Videophones and video doorbells GoSmart	123
Cameras, Surveillance	125
GoSmart Cameras	125
Doorbells	126
Wireless doorbells	126
Spare push buttons	127
Wired doorbells	127
Wireless doorbells GoSmart	128
Multimeters, testers	129
Testers	129
Thermostats, CO and smoke alarms	130
Thermostats	130
Thermostats GoSmart	130
CO and smoke alarms	131
Radiator fan	131
Watering timer GoSmart	132
Watering timer	133
Installation material, tapes	134
Installation material	134
Sockets, switches	134
EMOS	134
IP20	134
IP54/IP44	135
ABB	135
Others	135
EMOS	136
CYKLONE	136
Tapes	137
Electroinsulating PVC tapes	137
Other tapes	137

Batteries



GP Batteries

GP Consumer batteries

GP Alkaline

GP Alkaline

- ideal for devices with low power consumption
- operating temperature from -18 °C to +50 °C
- shelf life up to 7 years



- chemical constitution: alkaline
- voltage: 1.5 V
- packaging: 20 pcs, blister
- dimensions: 10.5 × 44.5 mm
- type: LR03 (AAA battery)
- weight: 11.4 g
- operating temperature: -18 °C to +50 °C



B0412L

20/-/160/480

10 24 110 200

LR03

- chemical constitution: alkaline
- voltage: 1.5 V
- packaging: 4 pcs, blister
- dimensions: 10.5 × 44.5 mm
- type: LR03 (AAA battery)
- weight: 11.4 g
- operating temperature: -18 °C to +50 °C



B04114

4/-/40/320

10 24 114 000

LR03

- chemical constitution: alkaline
- voltage: 1.5 V
- packaging: 8 pcs, blister
- dimensions: 10.5 × 44.5 mm
- type: LR03 (AAA battery)
- weight: 11.4 g
- operating temperature: -18 °C to +50 °C


**B04138**

8/-/96/384

10 24 118 000

LR03

- chemical constitution: alkaline
- voltage: 1.5 V
- packaging: 10 pcs, shrink
- dimensions: 10.5 × 44.5 mm
- type: LR03 (AAA battery)
- weight: 11.4 g
- operating temperature: -18 °C to +50 °C



**B0410G**

10/-/320/960

10 24 130 100

LR03

- chemical constitution: alkaline
- voltage: 1.5 V
- packaging: 20 pcs, blister
- dimensions: 14.5 × 50.5 mm
- type: LR6 (AA battery)
- weight: 23 g
- operating temperature: -18 °C to +50 °C


**B0422L**

20/-/160/480

10 24 210 200

LR6

- chemical constitution: alkaline
- voltage: 1.5 V
- packaging: 4 pcs, blister
- dimensions: 14.5 × 50.5 mm
- type: LR6 (AA battery)
- weight: 23 g
- operating temperature: -18 °C to +50 °C

**B04214**

4/-/40/320

10 24 214 000

LR6

- chemical constitution: alkaline
- voltage: 1.5 V
- packaging: 8 pcs, blister
- dimensions: 14.5 × 50.5 mm
- type: LR6 (AA battery)
- weight: 23 g
- operating temperature: -18 °C to +50 °C

**B04238**

8/-/96/384

10 24 218 000

LR6

- chemical constitution: alkaline
- voltage: 1.5 V
- packaging: 10 pcs, shrink
- dimensions: 14.5 × 50.5 mm
- type: LR6 (AA battery)
- weight: 23 g
- operating temperature: -18 °C to +50 °C



B0420G

10/-/160/480

10 24 230 100

LR6

GP Batteries

GP Consumer batteries

GP Lithium button



- wide range of packaging, size and model
- wide range of operating temperatures: -20 °C to +60 °C
- shelf life up to 10 years

- chemical constitution: lithium
- capacity: 165 mAh
- voltage: 3 V
- packaging: 4 pcs, blister
- dimensions: 20.0 × 2.5 mm
- type: GP CR2025
- weight: 2.5 g
- operating temperature: -20 °C to +60 °C



B32254

4/-/40/2,400

10 42 202 524

CR2025

- chemical constitution: lithium
- capacity: 240 mAh
- voltage: 3 V
- packaging: 4 pcs, blister
- dimensions: 16.0 × 3.2 mm
- type: CR2032
- weight: 3.1 g
- operating temperature: -20 °C to +60 °C



B32324

4/-/40/2,400

10 42 203 224

CR2032

- chemical constitution: lithium
- capacity: 300 mAh
- voltage: 3 V
- packaging: 4 pcs, blister
- dimensions: 24.5 × 3.0 mm
- type: GP CR2430
- weight: 4.3 g
- operating temperature: -20 °C to +60 °C

**B32304**

4/-/40/960

10 42 243 014

CR2430

- chemical constitution: lithium
- capacity: 590 mAh
- voltage: 3 V
- packaging: 4 pcs, blister
- dimensions: 24.5 × 5.0 mm
- type: GP CR2450
- weight: 6.6 g
- operating temperature: -20 °C to +60 °C

**B32854**

4/-/40/960

10 42 245 014

CR2450

GP Special alkaline



- long-lasting performance
- stable operating voltage
- operating temperature from 0 °C to +45 °C
- shelf life up to 3 years

- chemical constitution: alkaline-special
- capacity: 55 mAh (discharge load 20 kOhm)
- voltage: 12 V
- packaging: 4 pcs, blister
- dimensions: 10.22 × 28.2 mm
- type: GP 23A (V23GA, MN21, A23)
- weight: 7.9 g
- operating temperature: 0 °C to +45 °C

**B30234**

4/-/40/960

10 21 230 003

23A

GP Alkaline button



- long-lasting performance
- voltage of 1.5 V
- operating temperature 0 °C to +45 °C
- shelf life up to 3 years

- chemical constitution: alkaline
- capacity: 110 mAh (discharge load 1.6 kOhm)
- voltage: 1.5 V
- packaging: 2 pcs, blister
- dimensions: 11.6 × 5.4 mm
- type: GP A76F (AG13, LR44, LR1154, V13GA, PX76A)
- weight: 1.7 g
- operating temperature: 0 °C to +45 °C



4 891199 231278

B30764

4/-/40/1,920

10 41 760 014

GP A76U

GP Batteries

GP Consumer batteries

GP Rechargeable

GP ReCyko



- wide range of capacities and retail packages
- one of the longest run times available on the market
- low self-discharge – charged to 70 % after a year of no use
- precharged from production – for immediate use
- friendly to the environment and your wallet

- chemical constitution: NiMH
- capacity: 850 mAh
- voltage: 1.2 V
- number of charging cycles: more than 500
- packaging: 6 pcs, small paper box
- dimensions: 14.5 × 50.5 mm
- type: HR6 (AA battery)
- weight: 14.5 g
- operating temperature: -20 °C to +50 °C



4 891199 234699

B25186

6/-/72/288

10 32 126 082

85AAAHCE

- chemical constitution: NiMH
- capacity: 2 100 mAh
- voltage: 1.2 V
- number of charging cycles: more than 500
- packaging: 6 pcs, small paper box
- dimensions: 14.5 × 50.5 mm
- type: HR6 (AA battery)
- weight: 27 g
- operating temperature: -20 °C to +50 °C

**B25216**

6/-/72/288

10 32 226 214

GP RECYKO 2100
AA

GP Recharge



- wide range of capacities and retail packages
- low self-discharge – charged to 70 % after a year of no use
- precharged from production – for immediate use
- operating temperature from -20 °C to +50 °C
- more than 200 charging cycles

- chemical constitution: NiMH
- capacity: 800 mAh
- voltage: 1.2 V
- number of charging cycles: more than 200
- packaging: 6 pcs, small paper box
- dimensions: 10.5 × 44.5 mm
- type: HR03 (AAA battery)
- weight: 12 g
- operating temperature: -20 °C to +50 °C

**B27186**

6/-/72/288

10 32 126 081

GP RECHARGE
800 AAA

- chemical constitution: NiMH
- capacity: 2 100 mAh
- voltage: 1.2 V
- number of charging cycles: more than 200
- packaging: 6 pcs, small paper box
- dimensions: 14.5 × 50.5 mm
- type: HR6 (AA battery)
- weight: 23 g
- operating temperature: -20 °C to +50 °C

**B27216**

6/-/72/288

10 32 226 213

GP RECHARGE
2100 AA

Battery chargers, powerbanks, USB chargers



Battery chargers

GP Battery chargers



- unique new design concept of NiMH battery chargers
- USB power supply and small size allow you to charge anytime, anywhere
- even basic models offer quick and smart charging
- high-quality GP rechargeable batteries and micro USB cable included
- "Pro" model with LED screen and advanced features



auto
on/off



smart
diagnostics



charge
everywhere

- type of charger: intelligent
- charger design: USB
- power source: USB 5 V/1 A
- size of the charged cells: AAA, AA
- number of cells inside the package: 4
- type of cells inside the package: AA ReCyko 2 100
- charging time of the enclosed cells: 3:00/6:00
- number of charging channels: 2
- number of batteries charged: 2 or 4
- charging current for AA: 770 mA/380 mA
- charging current for AAA: 300 mA
- charging time AA 2 700 mAh: 4:00 - 8:00
- charging time AAA 1 000 mAh: 2:30 - 3:30
- packaging: 1 pc, small paper box



6
hrs
charging
time



ready
to use



1
year
storage



500
charging
cycles



4 891199 213267

B50444D

16 04 844 112

1/-/6/12

B441

- charging time AA 2 700 mAh: 5:30
- charging time AAA 1 000 mAh: 4:15
- charging time of the enclosed cells: 5:30
- type of charger: intelligent
- charging current for AA: 1 100-550 mA
- charging current for AAA: 730-370 mA
- power source: USB 5 V/1 A
- number of cells inside the package: 4
- number of charging channels: 4
- number of batteries charged: 1 to 4
- packaging: 1 pc, small paper box
- charger design: USB
- special features: capacity check, docking station
- type of cells inside the package: AA ReCyko 2 600
- size of the charged cells: AAA, AA



8
hrs
charging
time



ready
to use



1
year
storage



4 891199 195266

B53457P

16 04 845 114

1/-/6/12

M451

Powerbanks

GP Powerbanks



- 7 electronic safety protection features
- all models are able to charge more devices simultaneously
- all models are capable of Light Load charging (for smart-watches, headphones)
- all models are equipped with LED Display or LED indication
- passthrough function, auto On/Off

- battery capacity: 5 000 mAh/18.5 Wh
- battery type: Li-Po 3.7 V
- fast charging: no
- max.input power: 12 W
- type of input interface: 1× USB-C
- charging time: 3 hours
- max.output power: 12 W
- type of output interface: 2× USB-A, 1× USB-C
- cable included: USB-A/USB-C

- LED charging indicator
- LED battery status indicator
- auto ON/OFF
- material: ABS plastic
- colour: light grey
- weight: 115 g
- dimensions: 96 × 63 × 14 mm

**B6405GY**

16 11 640 500

1/-/2/20

B05B

- battery capacity: 10 000 mAh/37 Wh
- battery type: Li-Po 3.7 V
- fast charging: no
- max.input power: 15 W
- type of input interface: 1× USB-C
- charging time: 5,5 hours
- max.output power: 15 W
- type of output interface: 2× USB-A, 1× USB-C
- cable included: USB-A/USB-C

- LED charging indicator
- LED battery status indicator
- auto ON/OFF
- material: ABS plastic
- colour: beige
- weight: 226 g
- dimensions: 139 × 68 × 16 mm

**B6410BE**

16 11 641 000

1/-/2/20

B10B

- battery capacity: 10 000 mAh/37 Wh
- battery type: Li-Po 3.7 V
- fast charging: no
- max.input power: 15 W
- type of input interface: 1× USB-C
- charging time: 5,5 hours
- max.output power: 15 W
- type of output interface: 2× USB-A, 1× USB-C
- cable included: USB-A/USB-C

- LED charging indicator
- LED battery status indicator
- auto ON/OFF
- material: ABS plastic
- colour: blue
- weight: 226 g
- dimensions: 139 × 68 × 16 mm

**B6410BL**

16 11 641 001

1/-/2/20

B10B

- battery capacity: 20 000 mAh/74 Wh
- battery type: Li-Po 3.7 V
- fast charging: no
- max.input power: 15 W
- type of input interface: 1× USB-C
- charging time: 10 hours
- max.output power: 15 W
- type of output interface: 2× USB-A, 1× USB-C
- cable included: USB-A/USB-C
- LED charging indicator
- LED battery status indicator
- auto ON/OFF
- passthrough
- material: ABS plastic
- colour: black
- weight: 413 g
- dimensions: 138 × 68 × 29 mm


B6420B

1/-/2/20

16 11 642 000

B20B

EMOS Powerbanks

- all models are compatible with USB-C devices
- 6 electronic safety protection features
- cables with data transfer function are included
- certain models are featured with quick charge QC3.0 and PD20W
- excellent performance thanks to used high-quality battery and el.
- passthrough function, auto ON/OFF
- specific models have the option of wireless charging (MagSafe Wireless model)




- battery capacity: 10 000 mAh/38.5 Wh
- battery type: Li-Po 3.85 V
- fast charging: PD 20 W
- max.input power: 18 W
- type of input interface: 1× USB-C
- charging time: 2 hours
- max.output power: 20 W
- type of output interface: 1× USB-C
- cable included: USB-C/USB-C
- LED charging indicator
- LED battery status indicator
- auto ON/OFF
- passthrough
- material: aluminum
- colour: blue
- weight: 184 g
- dimensions: 99 × 65 × 17 mm


B0551BL

1/-/-/28

16 13 055 100

WI 1046




- battery capacity: 10 000 mAh/38.5 Wh
- battery type: Li-Po 3.85 V
- fast charging: PD 20 W
- max.input power: 18 W
- type of input interface: 1× USB-C
- charging time: 2 hours
- max.output power: 20 W
- type of output interface: 1× USB-C
- cable included: USB-C/USB-C
- LED charging indicator
- LED battery status indicator
- auto ON/OFF
- passthrough
- material: aluminum
- colour: grey
- weight: 184 g
- dimensions: 99 × 65 × 17 mm


B0551GY

1/-/-/28

16 13 055 101

WI 1046




- battery capacity: 10 000 mAh/38.5 Wh
- battery type: Li-Po 3.85 V
- fast charging: PD 20 W
- max.input power: 18 W
- type of input interface: 1× USB-C
- charging time: 2 hours
- max.output power: 20 W
- type of output interface: 1× USB-C
- cable included: USB-C/USB-C
- LED charging indicator
- LED battery status indicator
- auto ON/OFF
- passthrough
- material: aluminum
- colour: salmon
- weight: 184 g
- dimensions: 99 × 65 × 17 mm


B0551S

1/-/-/28

16 13 055 102

WI 1046



- battery capacity: 10 000 mAh/38.7 Wh
- battery type: Li-Po 3.87 V
- fast charging: PD 20 W
- max.input power: 18 W
- type of input interface: 1× USB-C
- charging time: 2.5 hours
- max.output power: 20 W
- type of output interface: 1× USB-C
- cable included: USB-C/USB-C
- LED charging indicator
- LED battery status indicator
- auto ON/OFF
- passthrough
- material: aluminum
- colour: rosegold
- weight: 200 g
- dimensions: 101 × 65 × 17 mm




B0552RG

1/-/-/28

16 13 055 200

MS31

- battery capacity: 10 000 mAh/38.7 Wh
- battery type: Li-Po 3.87 V
- fast charging: PD 20 W
- max.input power: 18 W
- type of input interface: 1× USB-C
- charging time: 2.5 hours
- max.output power: 20 W
- type of output interface: 1× USB-C
- cable included: USB-C/USB-C
- LED charging indicator
- LED battery status indicator
- auto ON/OFF
- passthrough
- material: aluminum
- colour: green
- weight: 200 g
- dimensions: 101 × 65 × 17 mm



B0552AG

1/-/-/28

16 13 055 201

MS31

- battery capacity: 5 000 mAh/19,25 Wh
- battery type: Li-Po 3.85 V
- fast charging: PD 20 W
- max.input power: 18 W
- type of input interface: 1× USB-C
- charging time: 2 hours
- max.output power: 20 W
- type of output interface: 1× USB-C
- cable included: USB-C/USB-C
- LED charging indicator
- LED battery status indicator
- auto ON/OFF
- passthrough
- material: aluminum
- colour: salmon
- weight: 121 g
- dimensions: 83 × 60 × 12.4 mm



B0555S

1/-/-/28

16 13 055 500

WI 522

- battery capacity: 5 000 mAh/19,25 Wh
- battery type: Li-Po 3.85 V
- fast charging: PD 20 W
- max.input power: 18 W
- type of input interface: 1× USB-C
- charging time: 2 hours
- max.output power: 20 W
- type of output interface: 1× USB-C
- cable included: USB-C/USB-C
- LED charging indicator
- LED battery status indicator
- auto ON/OFF
- passthrough
- material: aluminum
- colour: grey
- weight: 121 g
- dimensions: 83 × 60 × 12.4 mm



B0555GY

1/-/-/28

16 13 055 501

WI 522

- battery capacity: 5 000 mAh/19,25 Wh
- battery type: Li-Po 3.85 V
- fast charging: PD 20 W
- max.input power: 18 W
- type of input interface: 1× USB-C
- charging time: 2 hours
- max.output power: 20 W
- type of output interface: 1× USB-C
- cable included: USB-C/USB-C
- LED charging indicator
- LED battery status indicator
- auto ON/OFF
- passthrough
- material: aluminum
- colour: blue
- weight: 121 g
- dimensions: 83 × 60 × 12.4 mm



B0555BL

1/-/-/28

16 13 055 502

WI 522

- battery capacity: 20 000 mAh/74 Wh
- battery type: Li-Po 3.85 V
- fast charging: PD 65 W
- max.input power: 65 W
- type of input interface: 1× USB-C
- charging time: 2.5 hours
- max.output power: 65 W
- type of output interface: 1× USB-A, 1× USB-C
- cable included: USB-C/USB-C, data
- LED charging indicator
- LED battery status indicator
- auto ON/OFF
- passthrough
- material: ABS plastic
- colour: black
- weight: 334 g
- dimensions: 100 × 64 × 32 mm



B0560B
16 13 056 000

1/-/-/24
NTBF20

- battery capacity: 27 000 mAh
- battery type: Li-Ion 3.7 V
- fast charging: PD 100 W + PD 27 W
- max.input power: 100 W
- type of input interface: 1× USB-C
- charging time: 2.5 hours
- max.output power: 100 W
- type of output interface: 2× USB-C, 1× USB-A
- cable included: USB-C/USB-C
- LED charging indicator
- LED battery status indicator
- auto ON/OFF
- passthrough
- material: aluminum
- colour: black
- weight: 580 g
- dimensions: 190 × 74 × 27 mm



B0561B
16 13 056 100

1/-/-/12
NTBF30

USB chargers

- a choice of models supporting GaN technology and BASIC economically advantageous adapters
- GaN technology enables faster and more powerful charging while maintaining a compact size
- more USB ports, the ability to charge multiple devices at once
- most models support PD fast charging protocol
- Intelligent features for protection of connected devices


max. output 1× USB: A: 5 V/2 A (10 W) = max. output total: 10 W = charging: basic = protection against overload, overvoltage and short circuit = number of USB outputs: 1 = packaging: 1 pc, packaging: 1 pc, small paper box = dimensions: 35 × 72 × 22 mm = designed for: smartphone = input voltage: 100–240 V~ 50/60 Hz



V01B10
17 04 022 600

1/-/10/40
V01B10

max. output 1× USB: A: 5 V/3 A (15 W); C: 5 V/3 A (15 W) = max. output total: 15 W = charging: basic = protection against overload, overvoltage and short circuit = number of USB outputs: 2 = packaging: 1 pc, small paper box = dimensions: 35 × 72 × 22 mm = designed for: smartphone, tablet = input voltage: 100–240 V~ 50/60 Hz



V02B15
17 04 022 700


1/-/10/40
V02B15

max. output 1× USB: C1/C2: 5 V/3 A – 9 V/3 A – 12 V/2,9 A – 15 V/2,33 A – 20 V/1,75 A (35 W) = max. output total: 35 W = charging: fast = protection against overload, overvoltage and short circuit = number of USB outputs: 2 = packaging: 1 pc, small paper box = dimensions: 34 × 75 × 23 mm = designed for: smartphone, tablet = input voltage: 100–240 V~ 50/60 Hz



V03G35
17 04 022 800

1/-/10/40
V03G35



max. output 1× USB: A: 5 V/3 A – 9 V/2 A – 12 V/1,5 A (18 W); C: 5 V/3 A – 9 V/2,22 A – 12 V/1,67 A (20 W) = max. output total: 20 W = charging: fast = protection against overload, overvoltage and short circuit = number of USB outputs: 2 = packaging: 1 pc, small paper box = dimensions: 34 × 75 × 23 mm = designed for: smartphone, tablet = input voltage: 100–240 V~ 50/60 Hz



V02G20
17 04 022 900

1/-/10/40
V02G20




max. output 1× USB: C: 5 V/3 A – 9 V/2,22 A – 12 V/1,67 A (20 W) = max. output total: 20 W = charging: fast = protection against overload, overvoltage and short circuit = number of USB outputs: 1 = packaging: 1 pc, small paper box = dimensions: 34 × 75 × 23 mm = designed for: smartphone, tablet = input voltage: 100–240 V~ 50/60 Hz



V01G20
17 04 023 000

1/-/10/40
V01G20




max. output 1× USB: A: 5 V/3 A – 9 V/2 A – 12 V/1,5 A (18 W); C: 5 V/3 A – 9 V/3 A – 12 V/3 A – 15 V/3 A – 20 V/2,25 A (45 W) = max. output total: 45 W = charging: fast = protection against overload, overvoltage and short circuit = number of USB outputs: 2 = packaging: 1 pc, small paper box = dimensions: 34 × 84 × 23 mm = designed for: smartphone, tablet, notebook = input voltage: 100–240 V~ 50/60 Hz



V04G45
17 04 023 100

1/-/10/40
V04G45



max. output 1× USB: A: 5 V/3 A – 9 V/3 A – 12 V/3 A – 20 V/3 A (60 W); C1/C2: 5 V/3 A – 9 V/3 A – 12 V/3 A – 15 V/3 A – 20 V/3,25 A (65 W) = max. output total: 65 W = charging: fast = protection against overload, overvoltage and short circuit = number of USB outputs: 3 = packaging: 1 pc, small paper box = dimensions: 34 × 94 × 23 mm = designed for: smartphone, tablet, notebook = input voltage: 100–240 V~ 50/60 Hz




V05G65
17 04 023 200

1/-/10/40
V05G65



max. output 1× USB: A: 5 V/3 A – 9 V/3 A – 10 V/2,25 A – 12 V/2,5 A – 20 V/1,5 A (30 W); C1/C2/C3: 5 V/3 A – 9 V/3 A – 12 V/3 A – 15 V/3 A – 20 V/5 A – 21 V/5 A (105 W) = max. output total: 120 W = charging: fast = protection against overload, overvoltage and short circuit = number of USB outputs: 4 = packaging: 1 pc, small paper box = dimensions: 57 × 107 × 24 mm = designed for: smartphone, tablet, notebook = input voltage: 100–240 V~ 50/60 Hz



V06G120	1/-/10/40
17 04 023 300	V06G120

Portable Lighting



GP

Flashlights

GP Discovery



- quality all-metal GP torches for daily use
- powerful yet efficient LED chips (CREE LED in some models)
- compatible with alkaline and rechargeable batteries
- anti-scratch surface finish
- water-resistance up to IPX7 (CR41 usable briefly underwater)

- source of light: CREE LED
- maximal light output: 1 000 lm
- maximal beam distance: 170 m
- number of lighting modes: 5
- runtime: 40 hrs
- focus
- impact resistance: 2 m
- waterproof: IPX7
- rechargeable
- battery: Li-Ion
- battery type: 18650/3.7 V/2 600 mAh
- batteries included
- recharge time: 4 hrs
- power connector type: micro USB
- dimensions: 142.5 × 33 mm
- weight: 140 g/190 g
- packaging: 1 pc, small paper box


P8512

1/-/-12

14 51 704 201

CR42


EMOS

LED Metal Flashlights

EMOS Flashlights

- quality aluminium casing ensures lightness and durability
- battery-powered and rechargeable
- run time up to 22 hours
- maximal beam distance up to 350 m

- source of light: SMD LED + COB LED
- maximal light output: 600 lm
- maximal beam distance: 350 m
- number of lighting modes: 8
- runtime: 1-11 hrs
- focus
- impact resistance
- waterproof: yes (IP44)
- rechargeable



- battery: Li-Ion 18650
- battery type: 1 200 mAh/3.7 V
- batteries included
- recharge time: 4 hrs
- power connector type: USB-C
- features: hook, red, green, blue, white diffuser
- dimensions: 34 × 160 mm
- weight: 121 g
- packaging: 1 pc, box



P3118

1/-/6/24

14 50 000 450

P3118

- source of light: LED
- maximal light output: 300 lm
- maximal beam distance: 100 m
- number of lighting modes: 4
- runtime: 3-18 hrs
- focus
- impact resistance
- waterproof: yes (IP43)
- rechargeable



- battery: Li-Ion 16340
- battery type: 700 mAh/3.7 V
- batteries included
- recharge time: 2,5 h
- power connector type: USB-C
- features: clip, magnet, hand strap
- dimensions: 90 × 25 × 25 mm
- weight: 63 g
- packaging: 1 pc, box



P3120

1/-/10/40

14 50 000 520

P3120

- source of light: LED
- maximal light output: 1 200 lm
- maximal beam distance: 200 m
- number of lighting modes: 4
- runtime: 4-22 hrs
- focus
- impact resistance
- waterproof: yes (IP43)
- rechargeable



- battery: Li-Ion 18650
- battery type: 2 200 mAh/3.7 V
- batteries included
- recharge time: 4.5 hrs
- power connector type: USB-C
- features: clip, magnet, hand strap
- dimensions: 150 × 35 × 35 mm
- weight: 168 g
- packaging: 1 pc, box



P3121

1/-/6/24

14 50 000 530

P3121

- source of light: LED
- maximal light output: 3 000 lm
- maximal beam distance: 300 m
- number of lighting modes: 4
- runtime: 3,5–15 hrs
- focus
- impact resistance
- waterproof: yes (IP43)
- rechargeable
- battery: Li-Ion 26650
- battery type: 5 000 mAh/3.7 V
- batteries included
- recharge time: 6 hrs
- power connector type: USB-C
- features: hand strap
- dimensions: 175 × 45 × 45 mm
- weight: 360 g
- packaging: 1 pc, box



P3122
14 50 000 540


1/-/6/24
P3122

EMOS

LED Plastic Flashlights

- efficient, yet inexpensive light source
- compact and light
- rechargeable: USB-C and micro USB
- run time up to 5 hours
- maximal beam distance up to 170 m


- source of light: LED + COB LED
- maximal light output: 150 lm
- maximal beam distance: 150 m
- number of lighting modes: 4
- runtime: 2–4,5 h
- focus
- impact resistance
- waterproof: IP44
- rechargeable
- battery: Li-Ion 18650
- battery type: 1 200 mAh/3.7 V
- batteries included
- recharge time: 2 hrs
- power connector type: micro USB
- dimensions: 130 × 35 × 35 mm
- weight: 80 g
- packaging: 1 pc, box



P3214
14 40 004 908

1/-/6/36
P3214

- source of light: LED + SMD LED
- maximal light output: 80 lm
- maximal beam distance: 170 m
- number of lighting modes: 2
- runtime: 3,5–5 hrs
- impact resistance
- waterproof: no
- rechargeable
- battery: Li-Ion
- battery type: 800 mAh/3.7 V
- batteries included
- recharge time: 1.5 h
- power connector type: USB-C
- dimensions: 43 × 55 × 134 mm
- weight: 80 g
- packaging: 1 pc, paper card



P3215
14 50 000 500

1/-/6/18
P3215

EMOS


LED Work Lights

LED Rechargeable Work Lights

- with quality SMD/COB LED chips, lights the whole workspace
- adjustable body and numerous magnets and hooks for easy work
- reinforced ABS plastic – withstands most impacts and falls
- selected models are equipped with a powerbank function

- source of light: COB LED + SMD LED
- maximal light output: 800 lm
- maximal beam distance: 110 m
- number of lighting modes: 3
- runtime: 2,5–7 h
- impact resistance
- waterproof: yes (IP54)
- rechargeable
- battery: Li-Ion

- battery type: 2 000 mAh/3,7 V
- batteries included
- recharge time: 3 hrs
- power connector type: USB-C
- features: swivel handle, 2× hook, 2× magnet
- dimensions: 50 × 50 × 255 mm
- weight: 325 g
- packaging: 1 pc, box


P4544

1/-/-/6

14 50 000 440

P4544

- source of light: COB LED
- maximal light output: 1 000 lm
- maximal beam distance: 40 m
- number of lighting modes: 2
- runtime: 2–6 hrs
- impact resistance
- waterproof: yes (IP43)
- rechargeable
- battery: Li-Ion

- battery type: 2 600 mAh/7,4 V
- batteries included
- recharge time: 5 hrs
- power connector type: USB-C
- features: 2× swivel handle, 2× hook, 4× magnet
- dimensions: 50 × 46 × 500 mm
- weight: 490 g
- packaging: 1 pc, small paper box


P4545

1/-/-/12

14 50 000 550

P4545

EMOS

LED Rechargeable flashlights EXPERT

- torches with high luminous efficiency and long range
- equipped with two or three light sources
- up to 22 hours of light per charge, different lighting modes
- USB cable included
- made of reinforced ABS plastic resistant to falls
- range up to 500 metres

- source of light: SMD LED + COB LED
- maximal light output: 210 lm
- maximal beam distance: 240 m
- number of lighting modes: 4
- runtime: 3-6 hrs
- impact resistance: no
- waterproof: no
- rechargeable
- battery: Li-Ion 18650

- battery type: 1 800 mAh/3.7 V
- batteries included
- recharge time: 3 hrs
- power connector type: USB-C
- dimensions: 200 × 100 × 100 mm
- weight: 281 g
- packaging: 1 pc, box


P2314

1/-/-/6

14 50 000 460

P2314

- source of light: LED + COB LED (white, red)
- maximal light output: 700 lm
- maximal beam distance: 370 m
- number of lighting modes: 10+
- runtime: 4-11 hrs
- impact resistance
- waterproof: yes (IP43)
- rechargeable
- battery: Li-Ion accumulator

- battery type: 3 600 mAh/3.7 V
- batteries included
- recharge time: 4 hrs
- power connector type: USB C
- features: rotatable stand
- dimensions: 205 × 125 × 156 mm
- weight: 500 g
- packaging: 1 pc, small paper box


P2315

1/-/-/4

14 50 000 480

P2315

- source of light: SMD LED + 2× COB LED
- maximal light output: 1 000 lm
- maximal beam distance: 500 m
- number of lighting modes: 8+
- runtime: 10-22 hrs
- impact resistance
- waterproof: yes (IP44)
- rechargeable
- battery: Li-Ion accumulator

- battery type: 15 000 mAh/3.7 V
- batteries included
- recharge time: 10 hrs
- power connector type: USB C
- features: LCD indication, tripod thread
- dimensions: 205 × 102 × 148 mm
- weight: 781 g
- packaging: 1 pc, small paper box


P2317

1/-/-/4

14 50 000 490

P2317

- source of light: SMD LED + 2× COB LED
- maximal light output: 850 lm
- maximal beam distance: 400 m
- number of lighting modes: 7+
- runtime: 7–18 hrs
- impact resistance
- waterproof: yes (IP44)
- rechargeable
- battery: Li-Ion accumulator
- battery type: 8 000 mAh/3.7 V
- batteries included
- recharge time: 6 hrs
- power connector type: USB C
- features: LCD indication, tripod thread
- dimensions: 210 × 107 × 148 mm
- weight: 688 g
- packaging: 1 pc, small paper box


P2316

1/-/-/4

14 50 000 510

P2316

EMOS


LED Night Lights

LED Battery Night Lights

- better orientation in the dark for both children and adults
- powered by AAA batteries
- smart solution for places without power (attic or cabinet)
- with switch, photosensor (day/night) or PIR sensor
- very low power consumption

- automatic on/off
- time delay: 30 seconds +/- 5 seconds
- photosensor
- power source: 3× 1.5 V AAA
- rotation: 360°
- motion sensor
- packaging: 1 pc, box
- dimensions: 75 × 75 × 80 mm
- switch

- source of light: COB LED
- light color: cool white


P3324

1/-/10/40

14 40 013 130

P3324

LED 230 V Night Lights

- better orientation in the dark for both children and adults
- very low power consumption
- socket-powered – comfortable and eco-friendly (no batteries)
- selected models with USB output
- with switch, photosensor (day/night) or PIR sensor

- automatic on/off
- photosensor
- power source: 230 V~/50 Hz, max. 0,3 W
- motion sensor: no
- packaging: 1 pc, blister
- dimensions: 60 × 60 × 73 mm
- switch
- source of light: LED
- light color: warm white


P3323


1/-/5/20

14 56 000 200

P3323

Night lights GoSmart

- In the socket – a convenient, eco-friendly solution
- With switch, photosensor or PIR sensor
- Lighting for easy orientation in the dark, colour changing RGB
- Connection to the home network via WiFi
- Compatible with EMOS GoSmart products and TUYA devices
- Voice control with Google Assistant and Amazon Alexa



- source of light: LED
 - light color: multicolor
 - power source: 230 V~/50 Hz
 - switch
 - automatic on/off
 - photosensor
 - motion sensor
 - time delay: optional
 - dimensions: 55 × 75 × 80 mm
- packaging: 1 pc, box


P3322

1/-/-/36

14 56 000 190

P3322


EMOS

LED Flashlights display box

- made of aluminium or reinforced ABS plastic
- always at hand: in the pocket, tool case or the car
- batteries included
- flashlights with maximum beam distance to 130 m
- run timeup to 75 hours

- source of light: COB LED
- maximal light output: 150 lm
- maximal beam distance: 10 m
- number of lighting modes: 1
- runtime: 5 hrs
- impact resistance: no
- waterproof: yes (IP43)
- rechargeable: no
- battery: 3× AAA 1,5 V

- battery type: LR03 (1.5 V)
- batteries included
- features: 1× hook
- dimensions: 108 × 128 mm
- weight: 107 g
- packaging: 6 pcs, display box


P4716


6/-/-/6

14 40 013 129

P4716

- source of light: LED
- maximal light output: 30 lm
- maximal beam distance: 7 m
- number of lighting modes: 2
- runtime: 25-75 hrs
- impact resistance: no
- waterproof: no
- rechargeable: no
- battery: 3× AAA 1,5 V

- battery type: LR03 (1.5 V)
- batteries included
- features: 1×stand
- dimensions: 85 × 85 × 17 mm
- weight: 60 g
- packaging: 10 pcs, display box


P4718

10/-/10/40

14 40 813 102

P4718

- source of light: 5× LED + 1× UV LED
- maximal light output: 20 lm
- maximal beam distance: 2 m
- number of lighting modes: 2
- runtime: 30 hrs
- impact resistance
- rechargeable: no
- battery: 2× AAA
- battery type: LR03 (1.5 V)

- batteries included
- features: 1×stand
- dimensions: 85 × 198 × 30 mm
- weight: 105 g
- packaging: 10 pcs, display box



P4717

10/-/10/20

14 40 833 300

P4717

- source of light: LED + COB LED
- maximal light output: 120 lm
- maximal beam distance: 130 m
- number of lighting modes: 4
- runtime: 0,5–1,5 h
- impact resistance: no
- waterproof: no
- rechargeable
- battery: Li-ion 14500
- battery type: 400 mAh/3,7 V
- batteries included
- recharge time: 1.5 h
- power connector type: USB C
- dimensions: 123 × 26 × 29 mm
- weight: 50 g
- packaging: 10 pcs, display box



P4720

10/-/10/40

14 50 000 413

P4720

- source of light: 2× LED
- maximal light output: 90 lm
- maximal beam distance: 10 m
- number of lighting modes: 3
- runtime: 4,5–6 hrs
- impact resistance: no
- waterproof: yes (IP44)
- rechargeable
- battery: Li-Ion
- battery type: 400 mAh
- batteries included
- recharge time: 2,5 h
- power connector type: USB-C
- features: 1× hook
- dimensions: 170 × 55 × 55 mm
- weight: 53 g
- packaging: 9 pcs, display box


P4719

9/-/9/18

14 50 000 470

P4719

LED Keychains display box

- cute LED keychains for children
- different designs and motives
- some also make a sound when lit up
- powered by 3 button batteries (included)

- source of light: LED
- maximal light output: 5 lm
- number of lighting modes: 1
- rechargeable: no
- battery: 3× 1.5 V LR54
- battery type: LR54 (1.5 V)
- batteries included
- features: pendant for hanging
- packaging: 18 pcs, display box


P4721

18/-/18/36

14 39 013 902

P4721M/P4721N/
P4721S

Lighting




Light sources

LED bulbs

Filament

- maximum lighting efficiency with minimum energy consumption
- acts as a perfect replacement for tungsten filament bulbs
- instantly illuminates 100% at the flick of a switch
- high luminous efficacy up to 212 lm/W
- use: modern interiors, reception areas



- replacement of incandescent bulb: 75 W
- shape: Candle
- luminous flux: 1 055 lm
- color temperature: 2 700 K
- power: 7 W
- luminous efficacy: 151 lm/W
- energy efficiency class: D
- beam angle: 360°
- color rendering index (CRI): Ra >80
- voltage: 230 V~ / 50 Hz
- dimensions: 35 × 35 × 97 mm
- packaging: 1 pc, small box

**ZF3D52**

15 25 731 258

1/-/10/40

ZF3D52

- replacement of incandescent bulb: 75 W
- shape: Mini Globe
- luminous flux: 1 055 lm
- color temperature: 2 700 K
- power: 7 W
- luminous efficacy: 151 lm/W
- energy efficiency class: D
- beam angle: 360°
- color rendering index (CRI): Ra >80
- voltage: 230 V~ / 50 Hz
- dimensions: 45 × 45 × 80 mm
- packaging: 1 pc, small box

**ZF1D52**

15 25 731 259

1/-/10/60

ZF1D52

- replacement of incandescent bulb: 60 W
- shape: Candle
- luminous flux: 806 lm
- color temperature: 4 000 K
- power: 3.8 W
- luminous efficacy: 212 lm/W
- energy efficiency class: A
- beam angle: 360°
- color rendering index (CRI): Ra >80

- voltage: 230 V~/50 Hz
- dimensions: 35 × 35 × 97 mm
- packaging: 1 pc, small box

**ZF3A43**

1/-/10/40

15 25 731 453

ZF3A43

- replacement of incandescent bulb: 60 W
- shape: Mini Globe
- luminous flux: 806 lm
- color temperature: 4 000 K
- power: 3.8 W
- luminous efficacy: 212 lm/W
- energy efficiency class: A
- beam angle: 360°
- color rendering index (CRI): Ra >80

- voltage: 230 V~/50 Hz
- dimensions: 45 × 45 × 80 mm
- packaging: 1 pc, small box

**ZF1A43**

1/-/10/60

15 25 731 454

ZF1A43

- replacement of incandescent bulb: 75 W
- shape: Candle
- luminous flux: 1 055 lm
- color temperature: 4 000 K
- power: 7 W
- luminous efficacy: 151 lm/W
- energy efficiency class: D
- beam angle: 360°
- color rendering index (CRI): Ra >80

- voltage: 230 V~/50 Hz
- dimensions: 35 × 35 × 97 mm
- packaging: 1 pc, small box

**ZF3D53**

1/-/10/40

15 25 731 455

ZF3D53

- replacement of incandescent bulb: 75 W
- shape: Mini Globe
- luminous flux: 1 055 lm
- color temperature: 4 000 K
- power: 7 W
- luminous efficacy: 151 lm/W
- energy efficiency class: D
- beam angle: 360°
- color rendering index (CRI): Ra >80

- voltage: 230 V~/50 Hz
- dimensions: 45 × 45 × 80 mm
- packaging: 1 pc, small box

**ZF1D53**

1/-/10/60

15 25 731 456

ZF1D53

- replacement of incandescent bulb: 60 W
- shape: Candle
- luminous flux: 806 lm
- color temperature: 2 700 K
- power: 3.8 W
- luminous efficacy: 212 lm/W
- energy efficiency class: A
- beam angle: 360°
- color rendering index (CRI): Ra >80

- voltage: 230 V~/50 Hz
- dimensions: 35 × 35 × 97 mm
- packaging: 1 pc, small box

**ZF3A42**

1/-/10/40

15 25 741 258

ZF3A42

- replacement of incandescent bulb: 60 W
- shape: Mini Globe
- luminous flux: 806 lm
- color temperature: 2 700 K
- power: 3.8 W
- luminous efficacy: 212 lm/W
- energy efficiency class: A
- beam angle: 360°
- color rendering index (CRI): Ra >80
- voltage: 230 V~/50 Hz
- dimensions: 45 × 45 × 80 mm
- packaging: 1 pc, small box

**ZF1A42**

1/-/10/60

15 25 741 259

ZF1A42

- color rendering index (CRI): Ra >80
- replacement of incandescent bulb: 60 W
- voltage: 230 V~/50 Hz
- packaging: 3 pcs, small box
- power: 5.9 W
- dimensions: 60 × 60 × 108 mm
- luminous efficacy: 137 lm/W
- luminous flux: 806 lm
- color temperature: 2 700 K
- shape: A60
- beam angle: 360°
- energy efficiency class: D

**ZF5D42.3**

3/-/12/24

15 25 743 237

ZF5D42.3

- color rendering index (CRI): Ra >80
- replacement of incandescent bulb: 75 W
- voltage: 230 V~/50 Hz
- packaging: 1 pc, small box
- power: 7.5 W
- dimensions: 60 × 60 × 106 mm
- dimmable
- luminous efficacy: 141 lm/W
- luminous flux: 1 055 lm
- color temperature: 2 700 K
- shape: A60
- beam angle: 320°
- energy efficiency class: D

**ZF5D52D**

1/-/10/40

15 25 743 238

ZF5D52D

- color rendering index (CRI): Ra >80
- replacement of incandescent bulb: 100 W
- voltage: 230 V~/50 Hz
- packaging: 1 pc, small box
- power: 11 W
- dimensions: 60 × 60 × 108 mm
- dimmable
- luminous efficacy: 138 lm/W
- luminous flux: 1 521 lm
- color temperature: 2 700 K
- shape: A60
- beam angle: 320°
- energy efficiency class: D

**ZF5D62D**

1/-/10/20

15 25 743 239

ZF5D62D

- color rendering index (CRI): Ra >80
- replacement of incandescent bulb: 60 W
- voltage: 230 V~/50 Hz
- packaging: 3 pcs, small box
- power: 5.9 W
- dimensions: 60 × 60 × 108 mm
- luminous efficacy: 137 lm/W
- luminous flux: 806 lm
- color temperature: 4 000 K
- shape: A60
- beam angle: 360°
- energy efficiency class: D

**ZF5D43.3**

3/-/12/24

15 25 743 416

ZF5D43.3

- color rendering index (CRI): Ra >80
- replacement of incandescent bulb: 75 W
- voltage: 230 V~/50 Hz
- packaging: 1 pc, small box
- power: 7.5 W
- dimensions: 60 × 60 × 106 mm
- dimmable
- luminous efficacy: 141 lm/W
- luminous flux: 1 055 lm

- color temperature: 4 000 K
- shape: A60
- beam angle: 320°
- energy efficiency class: D

**ZF5D54D**

1/-/10/40

15 25 743 417

ZF5D54D

- color rendering index (CRI): Ra >80
- replacement of incandescent bulb: 100 W
- voltage: 230 V~/50 Hz
- packaging: 1 pc, small box
- power: 11 W
- dimensions: 60 × 60 × 108 mm
- dimmable
- luminous efficacy: 138 lm/W
- luminous flux: 1 521 lm

- color temperature: 4 000 K
- shape: A60
- beam angle: 320°
- energy efficiency class: D

**ZF5D64D**

1/-/10/20

15 25 743 418

ZF5D64D

Classic

- economical light source with an optimal price/quality ratio
- powerful, economical and extremely long lifetime
- 90% energy savings compared to conventional bulbs
- positive effect on human vision and health
- greater concentration of work and lower error rate
- 3 years warranty
- use: modern interiors, commercial and relaxation areas



- color rendering index (CRI): Ra >80
- replacement of incandescent bulb: 60 W
- voltage: 230 V~/50 Hz
- packaging: 1 pc, small box
- power: 7 W
- dimensions: 50 × 50 × 58 mm
- dimmable
- luminous efficacy: 114 lm/W
- luminous flux: 800 lm

- color temperature: 4 000 K
- shape: MR16
- beam angle: 100°
- energy efficiency class: E

**ZQ8E44D**

1/-/10/60

15 25 730 431

ZQ8E44D

- color rendering index (CRI): Ra >80
- replacement of incandescent bulb: 60 W
- voltage: 230 V~/50 Hz
- packaging: 1 pc, small box
- power: 7 W
- dimensions: 50 × 50 × 58 mm
- dimmable
- luminous efficacy: 114 lm/W
- luminous flux: 800 lm

- color temperature: 4 000 K
- shape: MR16
- beam angle: 100°
- energy efficiency class: E

**ZQ8E44S**

1/-/10/60

15 25 730 432

ZQ8E44S

- color rendering index (CRI): Ra >80
- replacement of incandescent bulb: 40 W
- voltage: 230 V~/50 Hz
- packaging: 1 pc, small box
- power: 4 W
- dimensions: 18 × 18 × 60 mm
- dimmable
- luminous efficacy: 118 lm/W
- luminous flux: 470 lm

- color temperature: 3 000 K
- shape: JC
- beam angle: 300°
- energy efficiency class: E

**ZQ9E22D**

1/-/10/80

15 25 736 212

ZQ9E22D

- color rendering index (CRI): Ra >80
- replacement of incandescent bulb: 40 W
- voltage: 230 V~/50 Hz
- packaging: 1 pc, small box
- power: 4 W
- dimensions: 18 × 18 × 60 mm
- dimmable
- luminous efficacy: 118 lm/W
- luminous flux: 470 lm

- color temperature: 4 000 K
- shape: JC
- beam angle: 300°
- energy efficiency class: E

**ZQ9E24D**

1/-/10/80

15 25 736 412

ZQ9E24D

- color rendering index (CRI): Ra >80
- replacement of incandescent bulb: 60 W
- voltage: 230 V~/50 Hz
- packaging: 1 pc, small box
- power: 7 W
- dimensions: 50 × 50 × 58 mm
- dimmable
- luminous efficacy: 114 lm/W
- luminous flux: 800 lm

- color temperature: 3 000 K
- shape: MR16
- beam angle: 100°
- energy efficiency class: E

**ZQ8E42D**

1/-/10/60

15 25 740 236

ZQ8E42D

- color rendering index (CRI): Ra >80
- replacement of incandescent bulb: 60 W
- voltage: 230 V~/50 Hz
- packaging: 1 pc, small box
- power: 7 W
- dimensions: 50 × 50 × 58 mm
- dimmable
- luminous efficacy: 114 lm/W
- luminous flux: 800 lm

- color temperature: 3 000 K
- shape: MR16
- beam angle: 100°
- energy efficiency class: E

**ZQ8E42S**

1/-/10/60

15 25 740 237

ZQ8E42S

- color rendering index (CRI): Ra >80
- replacement of incandescent bulb: 75 W
- voltage: 230 V~/50 Hz
- packaging: 1 pc, small box
- power: 10.5 W
- dimensions: 120 × 60 × 60 mm
- dimmable
- luminous efficacy: 101 lm/W
- luminous flux: 1 060 lm

- color temperature: 2 700 K
- shape: A60
- beam angle: 160°
- energy efficiency class: F

**ZQ5F52S**

1/-/10/80

15 25 743 240

ZQ5F52S

Basic

- most popular bulb types, found in most households
- economical replacement for obsolete tungsten filament bulbs
- low price and power consumption yet high efficiency
- lights up to 100 % immediately after pressing the switch

UV

Free

Hg

Free



100 % = 0 s



230 V~50 Hz

- color rendering index (CRI): Ra >80
- replacement of incandescent bulb: 60 W
- voltage: 230 V~50 Hz
- packaging: 1 pc, small box
- power: 8.8 W
- dimensions: 35 × 35 × 110 (max.) mm
- luminous efficacy: 92 lm/W
- luminous flux: 806 lm
- color temperature: 3 000 K

- shape: Candle
- beam angle: 180°
- energy efficiency class: F



E14



806 lm



8.8 W



Dimmable

3 000 K
WARM
WHITEA
↑
G
F

8 592920 144244

ZL3F47

15 25 731 261

1/-/10/60

ZL3F47

- color rendering index (CRI): Ra >80
- replacement of incandescent bulb: 60 W
- voltage: 230 V~50 Hz
- packaging: 1 pc, small box
- power: 8.8 W
- dimensions: 45 × 45 × 82 (max.) mm
- luminous efficacy: 92 lm/W
- luminous flux: 806 lm
- color temperature: 3 000 K

- shape: Mini Globe
- beam angle: 180°
- energy efficiency class: F



E14



806 lm



8.8 W



Dimmable

3 000 K
WARM
WHITEA
↑
G
F

8 592920 144305

ZL1F47

15 25 731 262

1/-/10/60

ZL1F47

- replacement of incandescent bulb: 40 W
- shape: Mini Globe
- luminous flux: 470 lm
- color temperature: 4 000 K
- power: 5.5 W
- luminous efficacy: 85 lm/W
- energy efficiency class: F
- beam angle: 180°
- color rendering index (CRI): Ra >80

- voltage: 230 V~50 Hz
- dimensions: 45 × 45 × 82 mm
- packaging: 1 pc, small box



E27



470 lm



5.5 W



Dimmable

4 000 K
NEUTRAL
WHITEA
↑
G
F

8 592920 134757

ZL6F23

15 25 731 451

1/-/10/60

ZL6F23

- replacement of incandescent bulb: 40 W
- shape: Candle
- luminous flux: 470 lm
- color temperature: 4 000 K
- power: 5.5 W
- luminous efficacy: 85 lm/W
- energy efficiency class: F
- beam angle: 180°
- color rendering index (CRI): Ra >80

- voltage: 230 V~50 Hz
- dimensions: 35 × 35 × 110 mm
- packaging: 1 pc, small box



E14



470 lm



5.5 W



Dimmable

4 000 K
NEUTRAL
WHITEA
↑
G
F

8 592920 134788

ZL3F23

15 25 731 452

1/-/10/60

ZL3F23

- color rendering index (CRI): Ra >80
- replacement of incandescent bulb: 60 W
- voltage: 230 V~/50 Hz
- packaging: 1 pc, small box
- power: 8.8 W
- dimensions: 35 × 35 × 110 (max.) mm
- luminous efficacy: 92 lm/W
- luminous flux: 806 lm
- color temperature: 4 000 K

- shape: Candle
- beam angle: 180°
- energy efficiency class: F

4 000 K
NEUTRAL
WHITE**ZL3F48**

15 25 731 457

1/-/10/60

ZL3F48

- color rendering index (CRI): Ra >80
- replacement of incandescent bulb: 60 W
- voltage: 230 V~/50 Hz
- packaging: 1 pc, small box
- power: 8.8 W
- dimensions: 45 × 45 × 82 (max.) mm
- luminous efficacy: 92 lm/W
- luminous flux: 806 lm
- color temperature: 4 000 K

- shape: Mini Globe
- beam angle: 180°
- energy efficiency class: F

4 000 K
NEUTRAL
WHITE**ZL1F48**

15 25 731 458

1/-/10/60

ZL1F48

- replacement of incandescent bulb: 40 W
- shape: Mini Globe
- luminous flux: 470 lm
- color temperature: 4 000 K
- power: 5.5 W
- luminous efficacy: 85 lm/W
- energy efficiency class: F
- beam angle: 180°
- color rendering index (CRI): Ra >80

- voltage: 230 V~/50 Hz
- dimensions: 40 × 40 × 82 mm
- packaging: 1 pc, small box

4 000 K
NEUTRAL
WHITE**ZL1F23**

15 25 741 451

1/-/10/60

ZL1F23

- color rendering index (CRI): Ra >80
- replacement of incandescent bulb: 60 W
- voltage: 230 V~/50 Hz
- packaging: 1 pc, small box
- power: 8.8 W
- dimensions: 60 × 60 × 110 (max.) mm
- luminous efficacy: 92 lm/W
- luminous flux: 806 lm
- color temperature: 3 000 K

- shape: A60
- beam angle: 200°
- energy efficiency class: F

3 000 K
WARM
WHITE**ZL5F47**

15 25 743 241

1/-/10/30

ZL5F47

- color rendering index (CRI): Ra >80
- replacement of incandescent bulb: 75 W
- voltage: 230 V~/50 Hz
- packaging: 1 pc, small box
- power: 11 W
- dimensions: 60 × 60 × 110 (max.) mm
- luminous efficacy: 96 lm/W
- luminous flux: 1 055 lm
- color temperature: 3 000 K

- shape: A60
- beam angle: 200°
- energy efficiency class: F

3 000 K
WARM
WHITE**ZL5F57**

15 25 743 242

1/-/10/30

ZL5F57

- color rendering index (CRI): Ra >80
- replacement of incandescent bulb: 100 W
- voltage: 230 V~/50 Hz
- packaging: 1 pc, small box
- power: 15.3 W
- dimensions: 60 × 60 × 125 (max.) mm
- luminous efficacy: 99 lm/W
- luminous flux: 1 521 lm
- color temperature: 3 000 K

- shape: A60
- beam angle: 200°
- energy efficiency class: F

**ZL5F67**

15 25 743 243

1/-/10/30

ZL5F67

- color rendering index (CRI): Ra >80
- replacement of incandescent bulb: 60 W
- voltage: 230 V~/50 Hz
- packaging: 3 pcs, small box
- power: 8.8 W
- dimensions: 60 × 60 × 110 (max.) mm
- luminous efficacy: 92 lm/W
- luminous flux: 806 lm
- color temperature: 3 000 K

- shape: A60
- beam angle: 200°
- energy efficiency class: F

**ZL5F47.3**

15 25 743 244

3/-/-/45

ZL5F47.3

- color rendering index (CRI): Ra >80
- replacement of incandescent bulb: 60 W
- voltage: 230 V~/50 Hz
- packaging: 6 pcs, small box
- power: 8.8 W
- dimensions: 60 × 60 × 110 (max.) mm
- luminous efficacy: 92 lm/W
- luminous flux: 806 lm
- color temperature: 3 000 K

- shape: A60
- beam angle: 200°
- energy efficiency class: F

**ZL5F47.6**

15 25 743 245

6/-/-/48

ZL5F47.6

- color rendering index (CRI): Ra >80
- replacement of incandescent bulb: 60 W
- voltage: 230 V~/50 Hz
- packaging: 1 pc, small box
- power: 8.8 W
- dimensions: 60 × 60 × 110 (max.) mm
- luminous efficacy: 92 lm/W
- luminous flux: 806 lm
- color temperature: 4 000 K

- shape: A60
- beam angle: 200°
- energy efficiency class: F

**ZL5F48**

15 25 743 419

1/-/10/30

ZL5F48

- color rendering index (CRI): Ra >80
- replacement of incandescent bulb: 75 W
- voltage: 230 V~/50 Hz
- packaging: 1 pc, small box
- power: 11 W
- dimensions: 60 × 60 × 110 (max.) mm
- luminous efficacy: 96 lm/W
- luminous flux: 1 055 lm
- color temperature: 4 000 K

- shape: A60
- beam angle: 200°
- energy efficiency class: F

**ZL5F58**

15 25 743 420

1/-/10/30

ZL5F58

- color rendering index (CRI): Ra >80
- replacement of incandescent bulb: 100 W
- voltage: 230 V~/50 Hz
- packaging: 1 pc, small box
- power: 15.3 W
- dimensions: 60 × 60 × 125 (max.) mm
- luminous efficacy: 99 lm/W
- luminous flux: 1 521 lm
- color temperature: 4 000 K
- shape: A60
- beam angle: 200°
- energy efficiency class: F



15.3 W

4 000 K
NEUTRAL
WHITE**ZL5F68**

1/-/10/30

15 25 743 421

ZL5F68

- color rendering index (CRI): Ra >80
- replacement of incandescent bulb: 60 W
- voltage: 230 V~/50 Hz
- packaging: 3 pcs, small box
- power: 8.8 W
- dimensions: 60 × 60 × 110 (max.) mm
- luminous efficacy: 92 lm/W
- luminous flux: 806 lm
- color temperature: 4 000 K
- shape: A60
- beam angle: 200°
- energy efficiency class: F



8.8 W

4 000 K
NEUTRAL
WHITE**ZL5F48.3**

3/-/-/45

15 25 743 422

ZL5F48.3

- color rendering index (CRI): Ra >80
- replacement of incandescent bulb: 60 W
- voltage: 230 V~/50 Hz
- packaging: 6 pcs, small box
- power: 8.8 W
- dimensions: 60 × 60 × 110 (max.) mm
- luminous efficacy: 92 lm/W
- luminous flux: 806 lm
- color temperature: 4 000 K
- shape: A60
- beam angle: 200°
- energy efficiency class: F



8.8 W

4 000 K
NEUTRAL
WHITE**ZL5F48.6**

6/-/-/48

15 25 743 423

ZL5F48.6

Deco

- attractive design for modern and retro luminaires
- replacement for conventional tungsten filament bulb
- saving electricity
- very low light temperature similar to a candle flame
- for a pleasant atmosphere
- high luminous efficiency up to 55 lm/W
- beam angle up to 330°

- color rendering index (CRI): Ra >80
- replacement of incandescent bulb: 14 W
- voltage: 230 V~/50 Hz
- packaging: 1 pc, small box
- power: 3.5 W
- dimensions: 126 × 126 × 163 mm
- luminous efficacy: 37 lm/W
- luminous flux: 130 lm
- color temperature: 1 800 K
- shape: S123
- beam angle: 330°
- energy efficiency class: G



3.5 W

1 800 K
FLAME**Z59D01**

1/-/-/8

15 25 813 200

Z59D01

- color rendering index (CRI): Ra >80
- replacement of incandescent bulb: 24 W
- voltage: 230 V~ /50 Hz
- packaging: 1 pc, small box
- power: 4.5 W
- dimensions: 125 × 125 × 164 mm
- luminous efficacy: 53 lm/W
- luminous flux: 240 lm
- color temperature: 1 800 K
- shape: CG125A
- beam angle: 330°
- energy efficiency class: G

**3.5 W****1 800 K**

FLAME

**Z50B11**

15 25 813 201

1/-/-/8

Z50B11



- color rendering index (CRI): Ra >80
- replacement of incandescent bulb: 11 W
- voltage: 230 V~ /50 Hz
- packaging: 1 pc, small box
- power: 2 W
- dimensions: 30 × 30 × 187 mm
- luminous efficacy: 50 lm/W
- luminous flux: 100 lm
- color temperature: 1 800 K
- shape: T30
- beam angle: 330°
- energy efficiency class: G

**3.5 W****1 800 K**

FLAME

**Z5AI01**

15 25 813 202

1/-/10/50

Z5AI01



- color rendering index (CRI): Ra >80
- replacement of incandescent bulb: 22 W
- voltage: 230 V~ /50 Hz
- packaging: 1 pc, small box
- power: 4 W
- dimensions: 130 × 80 × 171 mm
- luminous efficacy: 55 lm/W
- luminous flux: 220 lm
- color temperature: 1 800 K
- shape: G1300A
- beam angle: 330°
- energy efficiency class: G

**4 W****1 800 K**

FLAME

**Z5B011**

15 25 813 203

1/-/-/12

Z5B011



- color rendering index (CRI): Ra >80
- replacement of incandescent bulb: 22 W
- voltage: 230 V~ /50 Hz
- packaging: 1 pc, small box
- power: 4 W
- dimensions: 130 × 130 × 164 mm
- luminous efficacy: 55 lm/W
- luminous flux: 220 lm
- color temperature: 1 800 K
- shape: G130SRA
- beam angle: 330°
- energy efficiency class: G

**4 W****1 800 K**

FLAME

**Z5CS11**

15 25 813 204

1/-/-/8

Z5CS11



- color rendering index (CRI): Ra >80
- replacement of incandescent bulb: 16 W
- voltage: 230 V~ /50 Hz
- packaging: 1 pc, small box
- power: 4 W
- dimensions: 123 × 123 × 163 mm
- luminous efficacy: 38 lm/W
- luminous flux: 150 lm
- color temperature: 1 800 K
- shape: S123
- beam angle: 330°
- energy efficiency class: G

**4 W****1 800 K**

FLAME

**Z59G01**

15 25 813 205

1/-/-/8

Z59G01



- replacement of incandescent bulb: 21 W
- shape: A60
- luminous flux: 180 lm
- color temperature: 1 800 K
- power: 4.5 W
- luminous efficacy: 40 lm/W
- energy efficiency class: G
- beam angle: 320°
- color rendering index (CRI): Ra >80
- voltage: 230 V~/50 Hz
- dimensions: 60 × 60 × 106 mm
- packaging: 1 pc, small box

**Z55311**

1/-/10/40

15 25 813 206

Z55311




- color rendering index (CRI): Ra >80
- replacement of incandescent bulb: 21 W
- voltage: 230 V~/50 Hz
- packaging: 1 pc, small box
- power: 4.5 W
- dimensions: 64 × 64 × 140 mm
- luminous efficacy: 40 lm/W
- luminous flux: 180 lm
- color temperature: 1 800 K
- shape: ST64
- beam angle: 320°
- energy efficiency class: G

**Z57311**

1/-/10/30

15 25 813 207

Z57311



- color rendering index (CRI): Ra >80
- replacement of incandescent bulb: 21 W
- voltage: 230 V~/50 Hz
- packaging: 1 pc, small box
- power: 4.5 W
- dimensions: 95 × 95 × 140 mm
- luminous efficacy: 40 lm/W
- luminous flux: 180 lm
- color temperature: 1 800 K
- shape: G95
- beam angle: 320°
- energy efficiency class: G

**Z52311**

1/-/-/10

15 25 813 208

Z52311



- color rendering index (CRI): Ra >80
- replacement of incandescent bulb: 21 W
- voltage: 230 V~/50 Hz
- packaging: 1 pc, small box
- power: 4.5 W
- dimensions: 125 × 125 × 178 mm
- luminous efficacy: 40 lm/W
- luminous flux: 180 lm
- color temperature: 1 800 K
- shape: G125
- beam angle: 320°
- energy efficiency class: G

**Z58311**

1/-/-/8

15 25 813 209

Z58311



Light sources

LED tubes, tubes

BASIC

- designed to replace conventional fluorescent tubes
- they are characterized by luminous efficacy up to 111 lm/W
- high energy saving
- long service life
- favourable price/quality ratio
- use: administrative and industrial premises

- color rendering index (CRI): Ra >80
- voltage: 230 V~/50 Hz
- packaging: 25 pc, small box
- power: 9 W
- dimensions: 600 × 26 × 26 mm
- luminous efficacy: 111 lm/W
- luminous flux: 1 000 lm
- color temperature: 4 000 K
- shape: T8

- beam angle: 260°
- energy efficiency class: E



Z73115	25/-/-/25
15 35 247 000	Z73115

- color rendering index (CRI): Ra >80
- voltage: 230 V~/50 Hz
- packaging: 25 pc, small box
- power: 9 W
- dimensions: 600 × 26 × 26 mm
- luminous efficacy: 111 lm/W
- luminous flux: 1 000 lm
- color temperature: 6 500 K
- shape: T8

- beam angle: 260°
- energy efficiency class: E



Z73116	25/-/-/25
15 35 248 000	Z73116

- color rendering index (CRI): Ra >80
- voltage: 230 V~/50 Hz
- packaging: 25 pc, small box
- power: 18 W
- dimensions: 1 200 × 26 × 26 mm
- luminous efficacy: 110 lm/W
- luminous flux: 1 980 lm
- color temperature: 4 000 K
- shape: T8

- beam angle: 260°
- energy efficiency class: E



Z73125	25/-/-/25
15 35 249 000	Z73125

- color rendering index (CRI): Ra >80
- voltage: 230 V~/50 Hz
- packaging: 25 pc, small box
- power: 18 W
- dimensions: 1 200 × 26 × 26 mm
- luminous efficacy: 110 lm/W
- luminous flux: 1 980 lm
- color temperature: 6 500 K
- shape: T8
- beam angle: 260°
- energy efficiency class: E

**Z73126**

25/-/-/25

15 35 250 000

Z73126

- color rendering index (CRI): Ra >80
- voltage: 230 V~/50 Hz
- packaging: 25 pc, small box
- power: 24 W
- dimensions: 1 500 × 26 × 26 mm
- luminous efficacy: 110 lm/W
- luminous flux: 2 640 lm
- color temperature: 4 000 K
- shape: T8
- beam angle: 260°
- energy efficiency class: E

**Z73135**

25/-/-/25

15 35 251 000

Z73135

- color rendering index (CRI): Ra >80
- voltage: 230 V~/50 Hz
- packaging: 25 pc, small box
- power: 24 W
- dimensions: 1 500 × 26 × 26 mm
- luminous efficacy: 110 lm/W
- luminous flux: 2 640 lm
- color temperature: 6 500 K
- shape: T8
- beam angle: 260°
- energy efficiency class: E

**Z73136**

25/-/-/25

15 35 252 000

Z73136



Light sources

Car-light bulbs

- top OSRAM LED headlight bulbs
- with H7, H4 and H1 coils
- up to 150% brighter light than the minimum prescribed value
- up to 150 m longer range than competing brands
- 20% whiter light for better visibility and better car appearance

C2454.3

1/-/-/10

31 32 245 430

EMOS



4 062172 395014

- international marking: H7
- use for: front headlamp
- packaging: 1 pc, blister

**C2611.4**

2/-/-/10

31 32 260 802

EMOS



4 062172 399555

- international marking: H4
- use for: front headlamp
- packaging: 2 pcs, small plastic box

**C2611.5**

2/-/-/10

31 32 260 812

EMOS



4 062172 399579

- international marking: H7
- use for: front headlamp
- packaging: 2 pcs, small plastic box

**C2608.1**

2/-/-/10

31 32 260 813

C2608.1



4 062172 388108

- international marking: H1
- use for: front headlamp
- packaging: 2 pcs, small plastic box

**C3454.1**

1/-/-/10

31 32 345 410

C3454.1



4 062172 395601

- international marking: H4
- use for: front headlamp
- packaging: 1 pc, small box

**C3605.4**

2/-/-/10

31 32 360 540

C3605.4



4 062172 387590

- international marking: H7
- use for: front headlamp
- packaging: 2 pcs, small plastic box



C3606.3

2/-/-/10

31 32 360 630

C3606.3



4 062172 387477

- international marking: H4
- use for: front headlamp
- packaging: 1 pc, small box

**C3607.7**

2/-/-/10

31 32 360 770

64210NBS-2HB



4 062172 387576

- international marking: H7
- use for: front headlamp
- packaging: 2 pcs, small plastic box

**C3607.8**

2/-/-/10

31 32 360 780

64193NBS-2HB



4 062172 387453

- international marking: H4
- use for: front headlamp
- packaging: 2 pcs, small plastic box

**C3608.4**

2/-/-/10

31 32 360 840

C3608.4



4 062172 387538

- international marking: H7
- use for: front headlamp
- packaging: 2 pcs, small box

**C3608.5**

2/-/-/10

31 32 360 850

C3608.5



4 062172 387415

- international marking: H4
- use for: front headlamp
- packaging: 2 pcs, small plastic box

**C3613.1**

2/-/-/20

31 32 361 310

C3613.1



4 062172 401258

- international marking: W5W
- use for: registration plate, parking lights
- packaging: 2 pcs, small box

**C3613.2**

1/-/-/5

31 32 361 320

C3613.2



4 062172 401159

- international marking: H4
- use for: auxiliary headlight
- packaging: 1 pc, small box

**C3613.3**

2/-/-/10

31 32 361 330

C3613.3



4 062172 401210

- international marking: P21W
- use for: auxiliary headlight
- packaging: 2 pcs, small plastic box



Luminaires

Dustproofs

ESSENTIAL

DUSTY

ESSENTIAL

- designed for standard industrial installations
- replace older fluorescent luminaires
- long life and instant 100% output
- energy saving up to 50% compared to fluorescent luminaires
- IP65 protection guarantees water resistance
- possibility of through wiring
- 3 years warranty
- use: industrial buildings, garages, corridors, workshops

- color rendering index (CRI): Ra >80
- IP rating: IP65
- clip material: no clips
- voltage: 220-240 V
- packaging: 1 pc, blister
- through-wiring
- power: 18 W
- dimensions: 600 × 68 × 48 mm
- working temperature range: -20 °C to +40 °C

- luminous flux: 2 340 lm
- color temperature: 4 000 K
- protection class: II
- beam angle: 120°
- material: plastic (PC)



ZT3021 1/-/-/12
15 46 139 900 ZT3021

- color rendering index (CRI): Ra >80
- IP rating: IP65
- clip material: no clips
- voltage: 220-240 V
- packaging: 1 pc, blister
- through-wiring
- power: 36 W
- dimensions: 1 200 × 68 × 48 mm
- working temperature range: -20 °C to +40 °C

- luminous flux: 4 680 lm
- color temperature: 4 000 K
- protection class: II
- beam angle: 120°
- material: plastic (PC)



ZT3121 1/-/-/12
15 46 140 000 ZT3121

- color rendering index (CRI): Ra >80
- IP rating: IP65
- clip material: no clips
- voltage: 220-240 V
- packaging: 1 pc, blister
- through-wiring
- power: 50 W
- dimensions: 1 500 × 68 × 48 mm
- working temperature range: -20 °C to +40 °C

- luminous flux: 6 500 lm
- color temperature: 4 000 K
- protection class: II
- beam angle: 120°
- material: plastic (PC)



ZT3221 1/-/-/12
15 46 140 100 ZT3221

Luminaires

Floodlights

CLASSIC

TAMBO

CLASSIC

- aluminium with a milky PC diffuser for a pleasant light
- cost savings of up to 90% compared to halogen spotlights
- IP65 protection guarantees water resistance
- ultra-thin design
- bevelled bracket allows easy installation on the wall
- 3 years warranty
- use: commercial, private buildings and ambient environment

- light color: neutral white
- supply cable length: 30 cm
- color rendering index (CRI): Ra > 80
- IP rating: IP65
- lead-in cable material: rubber
- body material: aluminum
- voltage: 220-240 V~
- packaging: 1 pc, box
- power: 10 W

- dimensions: 105 × 102 × 55 mm
- mechanical impact protection: IK08
- luminous flux: 1 000 lm
- color temperature: 4 000 K
- beam angle: 120°

**ZS2512**

1/-/-14

15 31 251 200

ZS2512

- light color: neutral white
- supply cable length: 30 cm
- color rendering index (CRI): Ra > 80
- IP rating: IP65
- lead-in cable material: rubber
- body material: aluminum
- voltage: 220-240 V~
- packaging: 1 pc, box
- power: 20 W

- dimensions: 135 × 101 × 55 mm
- mechanical impact protection: IK08
- luminous flux: 2 000 lm
- color temperature: 4 000 K
- beam angle: 120°

**ZS2522**

1/-/-12

15 31 252 200

ZS2522

- light color: neutral white
- supply cable length: 30 cm
- color rendering index (CRI): Ra > 80
- IP rating: IP65
- lead-in cable material: rubber
- body material: aluminum
- voltage: 220-240 V~
- packaging: 1 pc, box
- power: 30 W

- dimensions: 165 × 114 × 55 mm
- mechanical impact protection: IK08
- luminous flux: 3 000 lm
- color temperature: 4 000 K
- beam angle: 120°

**ZS2532**

1/-/-10

15 31 253 200

ZS2532

- light color: neutral white
- supply cable length: 30 cm
- color rendering index (CRI): Ra > 80
- IP rating: IP65
- lead-in cable material: rubber
- body material: aluminum
- voltage: 220-240 V~
- packaging: 1 pc, box
- power: 50 W

- dimensions: 210 × 142 × 55 mm
- mechanical impact protection: IK08
- luminous flux: 5 000 lm
- color temperature: 4 000 K
- beam angle: 120°

4 000 K
NEUTRAL
WHITE**ZS2542**

15 31 254 200

1/-/-/7

ZS2542

- light color: neutral white
- supply cable length: 30 cm
- detection range of PIR Sensor: 10 m
- color rendering index (CRI): Ra > 80
- IP rating: IP54
- lead-in cable material: rubber
- body material: aluminum
- voltage: 220-240 V~
- packaging: 1 pc, box

- power: 10 W
- dimensions: 105 × 143 × 64 mm
- mechanical impact protection: IK06
- luminous flux: 1 000 lm
- color temperature: 4 000 K
- beam angle: 120°

4 000 K
NEUTRAL
WHITE**ZS2912**

15 31 291 200

1/-/-/14

ZS2912

- light color: neutral white
- supply cable length: 30 cm
- detection range of PIR Sensor: 10 m
- color rendering index (CRI): Ra > 80
- IP rating: IP54
- lead-in cable material: rubber
- body material: aluminum
- voltage: 220-240 V~
- packaging: 1 pc, box

- power: 20 W
- dimensions: 135 × 165 × 64 mm
- mechanical impact protection: IK06
- luminous flux: 2 000 lm
- color temperature: 4 000 K
- beam angle: 120°

4 000 K
NEUTRAL
WHITE**ZS2922**

15 31 292 200

1/-/-/12

ZS2922

- light color: neutral white
- supply cable length: 30 cm
- detection range of PIR Sensor: 10 m
- color rendering index (CRI): Ra > 80
- IP rating: IP54
- lead-in cable material: rubber
- body material: aluminum
- voltage: 220-240 V~
- packaging: 1 pc, box

- power: 30 W
- dimensions: 165 × 185 × 64 mm
- mechanical impact protection: IK06
- luminous flux: 3 000 lm
- color temperature: 4 000 K
- beam angle: 120°

4 000 K
NEUTRAL
WHITE**ZS2932**

15 31 293 200

1/-/-/10

ZS2932

- light color: neutral white
- supply cable length: 30 cm
- detection range of PIR Sensor: 10 m
- color rendering index (CRI): Ra > 80
- IP rating: IP54
- lead-in cable material: rubber
- body material: aluminum
- voltage: 220-240 V~
- packaging: 1 pc, box

- power: 50 W
- dimensions: 210 × 217 × 64 mm
- mechanical impact protection: IK06
- luminous flux: 5 000 lm
- color temperature: 4 000 K
- beam angle: 120°

4 000 K
NEUTRAL
WHITE**ZS2942**

15 31 294 200

1/-/-/7

ZS2942

VISIO

CLASSIC

- aluminum with milky PC diffuser ensuring pleasant light
- up to 90% operating cost savings compared to halogen floodlights
- ultra-thin design
- beveled mounting bracket allows easy wall installation
- adjustable PIR sensor sensitivity and operating time
- 3 years warranty
- use: commercial, private properties and surrounding environment

- light color: neutral white
- supply cable length: 25 cm
- color rendering index (CRI): Ra > 80
- IP rating: IP65
- lead-in cable material: rubber
- body material: aluminum
- voltage: 220-240 V~
- packaging: 1 pc, box
- power: 10 W

- dimensions: 115 × 97 × 22 mm
- luminous flux: 1 500 lm
- color temperature: 4 000 K
- lead-in cable type: H05RN-F
- beam angle: 120°



4 000 K
NEUTRAL
WHITE

**ZS2513**

1/-/5/30

15 31 251 300

ZS2513

- light color: neutral white
- supply cable length: 25 cm
- color rendering index (CRI): Ra > 80
- IP rating: IP65
- lead-in cable material: rubber
- body material: aluminum
- voltage: 220-240 V~
- packaging: 1 pc, box
- power: 20 W

- dimensions: 137 × 113 × 22 mm
- luminous flux: 3 000 lm
- color temperature: 4 000 K
- lead-in cable type: H05RN-F
- beam angle: 120°



4 000 K
NEUTRAL
WHITE

**ZS2523**

1/-/5/30

15 31 252 300

ZS2523

- light color: neutral white
- supply cable length: 25 cm
- color rendering index (CRI): Ra > 80
- IP rating: IP65
- lead-in cable material: rubber
- body material: aluminum
- voltage: 220-240 V~
- packaging: 1 pc, box
- power: 30 W

- dimensions: 163 × 135 × 22 mm
- luminous flux: 4 500 lm
- color temperature: 4 000 K
- lead-in cable type: H05RN-F
- beam angle: 120°



4 000 K
NEUTRAL
WHITE

**ZS2533**

1/-/-/24

15 31 253 300

ZS2533

- light color: neutral white
- supply cable length: 25 cm
- color rendering index (CRI): Ra > 80
- IP rating: IP65
- lead-in cable material: rubber
- body material: aluminum
- voltage: 220-240 V~
- packaging: 1 pc, box
- power: 50 W

- dimensions: 189 × 163 × 22 mm
- luminous flux: 7 500 lm
- color temperature: 4 000 K
- lead-in cable type: H05RN-F
- beam angle: 120°



4 000 K
NEUTRAL
WHITE

**ZS2543**

1/-/-/20

15 31 254 300

ZS2543

- light color: neutral white
- supply cable length: 25 cm
- color rendering index (CRI): Ra > 80
- IP rating: IP65
- lead-in cable material: rubber
- body material: aluminum
- voltage: 220–240 V~
- packaging: 1 pc, box
- power: 100 W

- dimensions: 260 × 226 × 24 mm
- luminous flux: 15 000 lm
- color temperature: 4 000 K
- lead-in cable type: H05RN-F
- beam angle: 120°



4 000 K
NEUTRAL
WHITE

**ZS2553**

1/-/-/10

15 31 255 300

ZS2553

- light color: neutral white
- supply cable length: 25 cm
- detection range of PIR Sensor: 10 m
- color rendering index (CRI): Ra > 80
- IP rating: IP54
- lead-in cable material: rubber
- body material: aluminum
- voltage: 220–240 V~
- packaging: 1 pc, box

- power: 10 W
- dimensions: 165 × 97 × 55 mm
- luminous flux: 1 500 lm
- color temperature: 4 000 K
- lead-in cable type: H05RN-F
- beam angle: 120°



4 000 K
NEUTRAL
WHITE

**ZS2913**

1/-/5/15

15 31 291 300

ZS2913

- light color: neutral white
- supply cable length: 25 cm
- detection range of PIR Sensor: 10 m
- color rendering index (CRI): Ra > 80
- IP rating: IP54
- lead-in cable material: rubber
- body material: aluminum
- voltage: 220–240 V~
- packaging: 1 pc, box

- power: 20 W
- dimensions: 185 × 113 × 55 mm
- luminous flux: 3 000 lm
- color temperature: 4 000 K
- lead-in cable type: H05RN-F
- beam angle: 120°



4 000 K
NEUTRAL
WHITE

**ZS2923**

1/-/5/15

15 31 292 300

ZS2923

- light color: neutral white
- supply cable length: 25 cm
- detection range of PIR Sensor: 10 m
- color rendering index (CRI): Ra > 80
- IP rating: IP54
- lead-in cable material: rubber
- body material: aluminum
- voltage: 220–240 V~
- packaging: 1 pc, box

- power: 30 W
- dimensions: 215 × 135 × 50 mm
- luminous flux: 4 500 lm
- color temperature: 4 000 K
- lead-in cable type: H05RN-F
- beam angle: 120°



4 000 K
NEUTRAL
WHITE

**ZS2933**

1/-/-/12

15 31 293 300

ZS2933

- light color: neutral white
- supply cable length: 25 cm
- detection range of PIR Sensor: 10 m
- color rendering index (CRI): Ra > 80
- IP rating: IP54
- lead-in cable material: rubber
- body material: aluminum
- voltage: 220–240 V~
- packaging: 1 pc, box

- power: 50 W
- dimensions: 242 × 163 × 50 mm
- luminous flux: 7 500 lm
- color temperature: 4 000 K
- lead-in cable type: H05RN-F
- beam angle: 120°



4 000 K
NEUTRAL
WHITE

**ZS2943**

1/-/-/8

15 31 294 300

ZS2943

Luminaires

Floodlights

ESSENTIAL


GLARO

ESSENTIAL

- made of aluminum with glass diffuser
- up to 90% operating cost savings compared to halogen floodlights
- ultra-thin design
- beveled mounting bracket allows easy wall installation
- adjustable PIR sensor sensitivity and operating time
- use: private properties and surrounding environment

- light color: neutral white
- supply cable length: 20 cm
- color rendering index (CRI): Ra > 80
- IP rating: IP65
- lead-in cable material: rubber
- body material: aluminum
- voltage: 220-240 V~
- packaging: 1 pc, box
- power: 10 W

- dimensions: 102 × 98 × 26 mm
- luminous flux: 1 000 lm
- color temperature: 4 000 K
- lead-in cable type: H05RN-F
- beam angle: 120°



4 000 K
NEUTRAL
WHITE

**ZS2214B**


1/-/5/30

15 31 221 400

ZS2214B

- light color: neutral white
- supply cable length: 20 cm
- color rendering index (CRI): Ra > 80
- IP rating: IP65
- lead-in cable material: rubber
- body material: aluminum
- voltage: 220-240 V~
- packaging: 1 pc, box
- power: 10 W

- dimensions: 102 × 98 × 26 mm
- luminous flux: 1 000 lm
- color temperature: 4 000 K
- lead-in cable type: H05RN-F
- beam angle: 120°



4 000 K
NEUTRAL
WHITE

**ZS2214W**

1/-/5/30

15 31 221 401

ZS2214W

- light color: neutral white
- supply cable length: 20 cm
- color rendering index (CRI): Ra > 80
- IP rating: IP65
- lead-in cable material: rubber
- body material: aluminum
- voltage: 220-240 V~
- packaging: 1 pc, box
- power: 20 W

- dimensions: 120 × 112 × 27 mm
- luminous flux: 2 000 lm
- color temperature: 4 000 K
- lead-in cable type: H05RN-F
- beam angle: 120°



4 000 K
NEUTRAL
WHITE

**ZS2224B**

1/-/5/20

15 31 222 400

ZS2224B

- light color: neutral white
- supply cable length: 20 cm
- color rendering index (CRI): Ra > 80
- IP rating: IP65
- lead-in cable material: rubber
- body material: aluminum
- voltage: 220-240 V~
- packaging: 1 pc, box
- power: 20 W

- dimensions: 120 × 112 × 27 mm
- luminous flux: 2 000 lm
- color temperature: 4 000 K
- lead-in cable type: H05RN-F
- beam angle: 120°



4 000 K
NEUTRAL
WHITE

**ZS2224W**

1/-/5/20

15 31 222 401

ZS2224W

- light color: neutral white
- supply cable length: 20 cm
- color rendering index (CRI): Ra > 80
- IP rating: IP65
- lead-in cable material: rubber
- body material: aluminum
- voltage: 220-240 V~
- packaging: 1 pc, box
- power: 30 W

- dimensions: 169 × 140 × 29 mm
- luminous flux: 3 000 lm
- color temperature: 4 000 K
- lead-in cable type: H05RN-F
- beam angle: 120°



4 000 K
NEUTRAL
WHITE

**ZS2234B**


1/-/5/20

15 31 223 400

ZS2234B

- light color: neutral white
- supply cable length: 20 cm
- color rendering index (CRI): Ra > 80
- IP rating: IP65
- lead-in cable material: rubber
- body material: aluminum
- voltage: 220-240 V~
- packaging: 1 pc, box
- power: 30 W

- dimensions: 169 × 140 × 29 mm
- luminous flux: 3 000 lm
- color temperature: 4 000 K
- lead-in cable type: H05RN-F
- beam angle: 120°



4 000 K
NEUTRAL
WHITE

**ZS2234W**

1/-/5/20

15 31 223 401

ZS2234W

- light color: neutral white
- supply cable length: 20 cm
- color rendering index (CRI): Ra > 80
- IP rating: IP65
- lead-in cable material: rubber
- body material: aluminum
- voltage: 220-240 V~
- packaging: 1 pc, box
- power: 50 W

- dimensions: 202 × 167 × 31 mm
- luminous flux: 5 000 lm
- color temperature: 4 000 K
- lead-in cable type: H05RN-F
- beam angle: 120°



4 000 K
NEUTRAL
WHITE

**ZS2244B**

1/-/4/16

15 31 224 400

ZS2244B

- light color: neutral white
- supply cable length: 20 cm
- color rendering index (CRI): Ra > 80
- IP rating: IP65
- lead-in cable material: rubber
- body material: aluminum
- voltage: 220-240 V~
- packaging: 1 pc, box
- power: 50 W

- dimensions: 202 × 167 × 31 mm
- luminous flux: 5 000 lm
- color temperature: 4 000 K
- lead-in cable type: H05RN-F
- beam angle: 120°



4 000 K
NEUTRAL
WHITE

**ZS2244W**


1/-/4/16

15 31 224 401

ZS2244W

- light color: neutral white
- supply cable length: 20 cm
- color rendering index (CRI): Ra > 80
- IP rating: IP65
- lead-in cable material: rubber
- body material: aluminum
- voltage: 220-240 V~
- packaging: 1 pc, box
- power: 100 W

- dimensions: 260 × 225 × 34 mm
- luminous flux: 10 000 lm
- color temperature: 4 000 K
- lead-in cable type: H05RN-F
- beam angle: 120°

**ZS2254B**


1/-/5/20

15 31 225 400

ZS2254B

- light color: neutral white
- supply cable length: 20 cm
- detection range of PIR Sensor: 8 m
- color rendering index (CRI): Ra > 80
- IP rating: IP54
- lead-in cable material: rubber
- body material: aluminum
- voltage: 220-240 V~
- packaging: 1 pc, box

- power: 10 W
- dimensions: 105 × 104 × 26 mm
- luminous flux: 1 000 lm
- color temperature: 4 000 K
- lead-in cable type: H05RN-F
- beam angle: 120°

**ZS2314B**


1/-/5/20

15 31 231 400

ZS2314B

- light color: neutral white
- supply cable length: 20 cm
- detection range of PIR Sensor: 8 m
- color rendering index (CRI): Ra > 80
- IP rating: IP54
- lead-in cable material: rubber
- body material: aluminum
- voltage: 220-240 V~
- packaging: 1 pc, box

- power: 10 W
- dimensions: 105 × 104 × 26 mm
- luminous flux: 1 000 lm
- color temperature: 4 000 K
- lead-in cable type: H05RN-F
- beam angle: 120°

**ZS2314W**

1/-/5/20

15 31 231 401

ZS2314W

- light color: neutral white
- supply cable length: 20 cm
- detection range of PIR Sensor: 8 m
- color rendering index (CRI): Ra > 80
- IP rating: IP54
- lead-in cable material: rubber
- body material: aluminum
- voltage: 220-240 V~
- packaging: 1 pc, box

- power: 20 W
- dimensions: 123 × 149 × 27 mm
- luminous flux: 2 000 lm
- color temperature: 4 000 K
- lead-in cable type: H05RN-F
- beam angle: 120°

**ZS2324B**

1/-/5/20

15 31 232 400

ZS2324B

- light color: neutral white
- supply cable length: 20 cm
- detection range of PIR Sensor: 8 m
- color rendering index (CRI): Ra > 80
- IP rating: IP54
- lead-in cable material: rubber
- body material: aluminum
- voltage: 220-240 V~
- packaging: 1 pc, box

- power: 20 W
- dimensions: 123 × 149 × 27 mm
- luminous flux: 2 000 lm
- color temperature: 4 000 K
- lead-in cable type: H05RN-F
- beam angle: 120°

**ZS2324W**

1/-/5/20

15 31 232 401

ZS2324W

- light color: neutral white
- supply cable length: 20 cm
- detection range of PIR Sensor: 8 m
- color rendering index (CRI): Ra > 80
- IP rating: IP54
- lead-in cable material: rubber
- body material: aluminum
- voltage: 220–240 V~
- packaging: 1 pc, box

- power: 30 W
- dimensions: 159 × 178 × 30 mm
- luminous flux: 3 000 lm
- color temperature: 4 000 K
- lead-in cable type: H05RN-F
- beam angle: 120°

**ZS2334B**

1/-/4/8

15 31 233 400

ZS2334B



- light color: neutral white
- supply cable length: 20 cm
- detection range of PIR Sensor: 8 m
- color rendering index (CRI): Ra > 80
- IP rating: IP54
- lead-in cable material: rubber
- body material: aluminum
- voltage: 220–240 V~
- packaging: 1 pc, box

- power: 30 W
- dimensions: 159 × 178 × 30 mm
- luminous flux: 3 000 lm
- color temperature: 4 000 K
- lead-in cable type: H05RN-F
- beam angle: 120°

**ZS2334W**

1/-/4/8

15 31 233 401

ZS2334W



- light color: neutral white
- supply cable length: 20 cm
- detection range of PIR Sensor: 8 m
- color rendering index (CRI): Ra > 80
- IP rating: IP54
- lead-in cable material: rubber
- body material: aluminum
- voltage: 220–240 V~
- packaging: 1 pc, box

- power: 50 W
- dimensions: 192 × 204 × 32 mm
- luminous flux: 5 000 lm
- color temperature: 4 000 K
- lead-in cable type: H05RN-F
- beam angle: 120°

**ZS2344B**

1/-/4/8

15 31 234 400

ZS2344B



- light color: neutral white
- supply cable length: 20 cm
- detection range of PIR Sensor: 8 m
- color rendering index (CRI): Ra > 80
- IP rating: IP54
- lead-in cable material: rubber
- body material: aluminum
- voltage: 220–240 V~
- packaging: 1 pc, box

- power: 50 W
- dimensions: 192 × 204 × 32 mm
- luminous flux: 5 000 lm
- color temperature: 4 000 K
- lead-in cable type: H05RN-F
- beam angle: 120°

**ZS2344W**

1/-/4/8

15 31 234 401

ZS2344W



Luminaires

LED Panels

PROFI


BAXXO

PROFI

- modern energy-saving lights using BACKLIT technology
- more uniform light emission and higher light efficiency
- excellent performance and light quality – CRI ≥ 80
- pleasantly diffused light
- 5 years warranty
- use: offices, classrooms, indoor spaces

- body colour: white
- color rendering index (CRI): Ra > 80
- body material: steel plate
- replacement of incandescent bulb: 4× 18 W CFL
- power: 36 W
- dimensions: 600 × 600 × 50 mm
- line: BAXXO
- luminous flux: 4 320 lm
- color temperature: 4 000 K

- type of mounting: surface
- UGR<: 22
- beam angle: 120°
- warranty period: 5 years

**ZB1614**

1/-/-/2

15 44 103 643

ZB1614

- body colour: white
- color rendering index (CRI): Ra > 80
- body material: steel plate
- replacement of incandescent bulb: 4× 18 W CFL
- power: 36 W
- dimensions: 600 × 600 × 50 mm
- line: BAXXO
- luminous flux: 4 320 lm
- color temperature: 4 000 K

- type of mounting: surface
- UGR<: 19
- beam angle: 120°
- warranty period: 5 years

**ZB1624**


1/-/-/2

15 44 103 644

ZB1624

- body colour: white
- color rendering index (CRI): Ra > 80
- body material: steel plate
- replacement of incandescent bulb: 4× 18 W CFL
- power: 36 W
- dimensions: 1 200 × 300 × 50 mm
- line: BAXXO
- luminous flux: 4 320 lm
- color temperature: 4 000 K

- type of mounting: surface
- UGR<: 22
- beam angle: 120°
- warranty period: 5 years

**ZB3614**

1/-/-/2

15 44 203 620

ZB3614

- body colour: white
- color rendering index (CRI): Ra > 80
- body material: steel plate
- replacement of incandescent bulb: 4× 18 W CFL
- power: 36 W
- dimensions: 1 200 × 300 × 50 mm
- line: BAXXO
- luminous flux: 4 320 lm
- color temperature: 4 000 K
- type of mounting: surface
- UGR<: 19
- beam angle: 120°
- warranty period: 5 years

**ZB3624**

1/-/-/2

15 44 203 621

ZB3624

Luminaires

Surface Luminaires

PROFI

TIVI

PROFI

- ceiling lamps with a light source of energy class A
- high luminous efficacy and simple design
- IP44 enclosure ensures water resistance
- easy installation
- use: indoor and outdoor environment of premises and houses

- power: 5.2 W
- replacement of incandescent bulb: 60 W
- luminous flux: 790 lm
- color temperature: 3 000 K
- body material: steel plate
- color rendering index (CRI): Ra > 80
- beam angle: 120°
- type of mounting: surface
- dimensions: diameter 250 × 70 mm
- body colour: white
- line: TIVI
- warranty period: 5 years

**ZM3415**

1/-/-/2

15 39 084 050

ZM3415

- power: 8.6 W
- replacement of incandescent bulb: 90 W
- luminous flux: 1 300 lm
- color temperature: 3 000 K
- body material: steel plate
- color rendering index (CRI): Ra > 80
- beam angle: 120°
- type of mounting: surface
- dimensions: diameter 320 × 70 mm
- body colour: white
- line: TIVI
- warranty period: 5 years

**ZM3416**

1/-/-/2

15 39 084 080

ZM3416

- power: 11 W
- replacement of incandescent bulb: 115 W
- luminous flux: 1 650 lm
- color temperature: 3 000 K
- body material: steel plate
- color rendering index (CRI): Ra > 80
- beam angle: 120°
- type of mounting: surface
- dimensions: 380 × 70 mm in diameter
- body colour: white
- line: TIVI
- warranty period: 5 years

**ZM3417**

1/-/-/2

15 39 084 110

ZM3417

- power: 12.5 W
- replacement of incandescent bulb: 130 W
- luminous flux: 1 875 lm
- color temperature: 3 000 K
- body material: steel plate
- color rendering index (CRI): Ra > 80
- beam angle: 120°
- type of mounting: surface
- dimensions: 380 × 70 mm in diameter
- body colour: white
- line: TIVI
- warranty period: 5 years

**ZM3418**

1/-/-/2

15 39 084 120

ZM3418

Luminaires

Recessed Luminaires

PROFI

LORI

PROFI

- IP65 rating ensures water and dust resistance
- equipped with integrated driver
- two color variants
- premium quality and exclusive appearance
- 3 years warranty
- use: bathrooms

- body colour: white
- color rendering index (CRI): Ra > 80
- body material: plastic
- mounting hole: 72 mm
- replacement of incandescent bulb: 30 W
- power: 4.5 W
- dimensions: diameter 85 × 29 mm
- luminous flux: 345 lm
- color temperature: 2 700/4 000 K
- type of mounting: recessed
- beam angle: 110°
- warranty period: 3 years

**ZV1163**

1/-/6/24

15 40 116 900

ZV1163

- body colour: black
- color rendering index (CRI): Ra > 80
- body material: plastic
- mounting hole: 72 mm
- replacement of incandescent bulb: 30 W
- power: 4.5 W
- dimensions: diameter 85 × 29 mm
- luminous flux: 345 lm
- color temperature: 2 700/4 000 K

- type of mounting: recessed
- beam angle: 110°
- warranty period: 3 years

**ZV1164**

1/-/6/24

15 40 117 000

ZV1164

Luminaire

Emergency Luminaire

PROFI

NESSI

PROFI

- emergency luminaires are used in case of power failure
- ensure safe egress from rooms during a power outage
- sufficient backup power for 3 hours during a power outage
- test button and LED indicator for testing functionality
- 4 years warranty
- use: industrial buildings, garages, hallways, offices

- power voltage: 220–240 V AC
- input power: 6/10 W max.
- battery capacity: 6 600 mAh
- backup time: 3 h
- battery type: LiFePo4
- warranty period: 4 years
- dimensions: 321 × 167 × 83 mm
- light color: cool white
- color temperature: 6 500 K

- luminous flux: 1 500 lm
- body material: plastic (ABS)
- IP rating: IP66
- mounting type: attached
- type of emergency light operation: non-maintained
- type of emergency operation test: autotest

**ZN1120**

1/-/-/4

15 48 112 000

ZN1120

- power voltage: 220–240 V AC
- input power: 3 W max.
- battery capacity: 1 500 mAh
- backup time: 3 h
- battery type: LiFePo4
- warranty period: 4 years
- dimensions: 252 × 123 × 65 mm
- light color: cool white
- color temperature: 6 500 K

- luminous flux: 150 lm
- body material: plastic (PC)
- IP rating: IP66
- mounting type: attached
- type of emergency light operation: maintained/non-
- type of emergency operation test: autotest

**ZN2120**

1/-/-/12

15 48 212 000

ZN2120

- power voltage: 220–240 V AC
- input power: 4 W max.
- battery capacity: 3 000 mAh
- backup time: 3 h
- battery type: LiFePo4
- warranty period: 4 years
- dimensions: 252 × 123 × 65 mm
- light color: cool white
- color temperature: 6 500 K

- luminous flux: 300 lm
- body material: plastic (PC)
- IP rating: IP66
- mounting type: attached
- type of emergency light operation: maintained/non-
- type of emergency operation test: autotest

**ZN2130**

15 48 213 000

1/-/-/12

ZN2130

ORSU

PROFI

- emergency luminaires are used in case of power failure
- ensure safe egress from rooms during a power outage
- sufficient backup power for 3 hours during a power outage
- test button and LED indicator for testing functionality
- 4 years warranty
- use: industrial and warehouse buildings, corridors, offices

- power voltage: 220–240 V AC
- input power: 6 W max.
- battery capacity: 3 000 mAh
- backup time: 3 h
- battery type: LiFePo4
- warranty period: 4 years
- dimensions: 140 × 55 mm in diameter
- light color: cool white
- color temperature: 6 500 K

- luminous flux: 450 lm
- body material: plastic (PC)
- IP rating: IP20
- mounting type: attached
- type of emergency light operation: non-maintained
- type of emergency operation test: manual button

**ZN1320**

15 48 132 000

1/-/-/12

ZN1320

- power voltage: 220–240 V AC
- input power: 1 W
- battery capacity: 1 500 mAh
- backup time: 3 h
- battery type: LiFePo4
- warranty period: 4 years
- dimensions: diameter 50 × 17 mm
- light color: cool white
- color temperature: 6 500 K

- luminous flux: 130 lm
- body material: plastic (PC)
- IP rating: IP20
- mounting type: attached
- type of emergency light operation: non-maintained
- type of emergency operation test: autotest

**ZN1330**

15 48 133 000

1/-/-/20

ZN1330

- power voltage: 220–240 V AC
- input power: 2 W max.
- battery capacity: 3 300 mAh
- backup time: 3 h
- battery type: LiFePo4
- warranty period: 4 years
- dimensions: diameter 95 × 31 mm
- light color: cool white
- color temperature: 6 500 K

- luminous flux: 300 lm
- body material: plastic (PC)
- IP rating: IP20
- mounting type: attached
- type of emergency light operation: non-maintained
- type of emergency operation test: autotest

**ZN1340**

15 48 134 000

1/-/-/8

ZN1340

Luminaires


Garden Lighting

EXCLUSIVE


Garden Lighting GoSmart



- Aluminium body and glass milk diffuser
- Minimal power consumption, superior durability
- IP65 protection guarantees water resistance
- Applications: staircases, outdoor facades, walls
- Connection to home network via WiFi
- Compatible with EMOS GoSmart products and TUYA devices
- Voice control with Google Assistant and Amazon Alexa



- protocol: WIFI + BLE
- power: 7 W
- luminous flux: 400 lm
- color temperature: 3 000–6 500 K
- light color: warm white–cool white
- luminous efficacy: 57 lm/W
- colour settings (RGB)
- supported OS: iOS, Android
- transmission frequency: 2.4 GHz WiFi
- compatibility: EMOS GoSmart, Tuya, Lidl, Smartlife
- IP rating: IP65
- length: 57 mm
- width: 57 mm
- supply line length: 1.5 m
- number of segments: 4+0+0
- maximum number of segments: 8

**ZIW194R**

14 54 194 000

1/-/-/6

ZIW194R

- protocol: WIFI + BLE
- power: 4 W
- luminous flux: 330 lm
- color temperature: 3 000–6 500 K
- light color: warm white–cool white
- luminous efficacy: 82 lm/W
- colour settings (RGB)
- supported OS: iOS, Android
- transmission frequency: 2.4 GHz WiFi
- compatibility: EMOS GoSmart, Tuya, Lidl, Smartlife
- IP rating: IP65
- length: 25,5 mm
- width: 102 mm
- supply line length: 1.5 m
- number of segments: 1
- maximum number of segments: 6

**ZIW181R**

15 54 181 000

1/-/-/8

ZIW181R

- protocol: WIFI + BLE
- power: 14 W
- luminous flux: 990 lm
- color temperature: 3 000–6 500 K
- light color: warm white–cool white
- luminous efficacy: 70 lm/W
- colour settings (RGB)
- supported OS: iOS, Android
- transmission frequency: 2.4 GHz WiFi
- compatibility: EMOS GoSmart, Tuya, Lidl, Smartlife
- IP rating: IP65
- length: 25,5 mm
- width: 102 mm
- supply line length: 1.5 m
- number of segments: 3
- maximum number of segments: 6

**ZIW184R**

15 54 184 000

1/-/-/4

ZIW184R

- protocol: WIFI + BLE
- power: 1.5 W
- luminous flux: 100 lm
- color temperature: 3 000–6 500 K
- light color: warm white–cool white
- luminous efficacy: 66 lm/W
- colour settings (RGB)
- supported OS: iOS, Android
- transmission frequency: 2.4 GHz WiFi
- compatibility: EMOS GoSmart, Tuya, Lidl, Smartlife
- IP rating: IP65
- length: 57 mm
- width: 57 mm
- supply line length: 1.5 m
- number of segments: 1
- maximum number of segments: 8

DIMMABLE
0%–100%

CCT

RGB

**ZIW191R**

1/-/-/12

15 54 191 000

ZIW191R

Luminaires

Garden Lighting

CLASSIC

BRIXO

CLASSIC

- integrated PIR sensor for motion detection
- zero energy consumption from the grid
- 2 light modes
- IP65 rating ensures water and dust resistance
- use: permanent outdoor lighting

- luminous flux: 350 lm
- color temperature: 4 000 K
- light color: neutral white
- color rendering index (CRI): Ra > 80
- voltage: 3.7 V
- IP rating: IP65
- beam angle: 140° × 70°
- dimensions: 138 × 90 × 35 mm
- battery: Li-Ion 1 200 mAh
- AKU lighting time: 35 hours
- detection range of PIR Sensor: 6 m
- body material: plastic (ABS+PC)
- packaging: 1 pc, box

**ZG161S**

1/-/4/16

15 53 161 000

BRICK SMALL W

- luminous flux: 350 lm
- color temperature: 4 000 K
- light color: neutral white
- color rendering index (CRI): Ra > 80
- voltage: 3.7 V
- IP rating: IP65
- beam angle: 140° × 70°
- dimensions: 138 × 90 × 35 mm
- battery: Li-Ion 1 200 mAh
- AKU lighting time: 35 hours
- detection range of PIR Sensor: 6 m
- body material: plastic (ABS+PC)
- packaging: 1 pc, box


**ZG162S**

1/-/4/16

15 53 162 000

BRICK SMALL B

- luminous flux: 900 lm
- color temperature: 4 000 K
- light color: neutral white
- color rendering index (CRI): Ra > 80
- voltage: 3.7 V
- IP rating: IP65
- beam angle: 140° × 70°
- dimensions: 230 × 97 × 43 mm
- battery: Li-Ion 3 000 mAh
- AKU lighting time: 35 hours
- detection range of PIR Sensor: 7 m
- body material: plastic (ABS+PC)
- packaging: 1 pc, box

**ZG165S**

1/-/4/12

15 53 165 000

BRICK BIG W

- luminous flux: 900 lm
- color temperature: 4 000 K
- light color: neutral white
- color rendering index (CRI): Ra > 80
- voltage: 3.7 V
- IP rating: IP65
- beam angle: 140° × 70°
- dimensions: 230 × 97 × 43 mm
- battery: Li-Ion 3 000 mAh
- AKU lighting time: 35 hours
- detection range of PIR Sensor: 7 m
- body material: plastic (ABS+PC)
- packaging: 1 pc, box

**ZG166S**

1/-/4/12

15 53 166 000

BRICK BIG B

SOLO

CLASSIC

- integrated PIR sensor for motion detection
- zero energy consumption from the grid
- 3 light modes
- IP54 rating ensures water resistance
- use: permanent outdoor lighting

- luminous flux: 1 000 lm
- color temperature: 4 000 K
- light color: neutral white
- color rendering index (CRI): Ra > 80
- voltage: 3.7 V
- IP rating: IP54
- beam angle: 100°
- dimensions: 145 × 136 × 26 mm
- battery: Li-Ion 2 000 mAh
- detection range of PIR Sensor: 6 m
- body material: plastic (ABS+PC)
- packaging: 1 pc, box

**ZG121S**

1/-/4/16

15 52 121 000

SW3

- luminous flux: 1 600 lm
- color temperature: 4 000 K
- light color: neutral white
- color rendering index (CRI): Ra > 80
- voltage: 3.7 V
- IP rating: IP54
- beam angle: 100°
- dimensions: 190 × 184 × 28 mm
- battery: Li-Ion 3 600 mAh
- detection range of PIR Sensor: 6 m
- body material: plastic (ABS+PC)
- packaging: 1 pc, box

**ZG122S**

1/-/4/8

15 52 122 000

SW3

SPILO

CLASSIC

- remote control operation
- integrated PIR sensor for motion detection
- zero energy consumption from the grid
- multiple installation methods
- use: permanent outdoor lighting

- luminous flux: 1 500 lm
- color temperature: 3 000 K
- light color: warm white
- color rendering index (CRI): Ra > 80
- voltage: 3.7 V
- IP rating: IP54
- beam angle: 110°
- dimensions: 180 × 146 × 122 mm
- battery: Li-Ion 3 600 mAh
- detection range of PIR Sensor: 6 m
- body material: plastic (ABS+PC)
- packaging: 1 pc, box

**ZG131S**

1/-/-/6

15 52 131 000

BSLF02

- luminous flux: 1 500 lm
- color temperature: 4 000 K
- light color: neutral white
- color rendering index (CRI): Ra > 80
- voltage: 3.7 V
- IP rating: IP54
- beam angle: 110°
- dimensions: 180 × 146 × 122 mm
- battery: Li-Ion 3 600 mAh
- detection range of PIR Sensor: 6 m
- body material: plastic (ABS+PC)
- packaging: 1 pc, box

**ZG132S**

1/-/-/6

15 52 132 000

BSLF02

SUNNO

CLASSIC

- integrated PIR sensor for motion detection
- zero energy consumption from the grid
- 3 light modes
- IP54 rating ensures water resistance
- use: permanent outdoor lighting

- luminous flux: 1 300 lm
- color temperature: 4 000 K
- light color: neutral white
- color rendering index (CRI): Ra > 80
- voltage: 3.7 V
- IP rating: IP54
- beam angle: 100°
- dimensions: 181 × 180 × 70 mm
- supply cable length: 1.8 m
- battery: Li-Ion 2 500 mAh
- detection range of PIR Sensor: 6 m
- body material: plastic (ABS+PC)
- packaging: 1 pc, box

**ZG112S**

1/-/4/8

15 52 112 000

SW1

LUNIS

CLASSIC

- integrated PIR sensor for motion detection
- zero energy consumption from the grid
- hook for hanging
- IP65 rating ensures water and dust resistance
- use: permanent outdoor lighting

- dimensions: 139 × 104 × 70 mm
- luminous flux: 220 lm
- color temperature: 4 000 K
- light color: neutral white
- color rendering index (CRI): Ra > 80
- voltage: 3.7 V
- IP rating: IP65
- beam angle: 120° × 60°
- battery: Li-Ion 1 200 mAh
- AKU lighting time: 35 hours
- detection range of PIR Sensor: 6 m
- body material: plastic (ABS+PC)
- packaging: 1 pc, box

**ZG151S**

1/-/-/6

15 53 151 000

PANDA NW

SALVIA

CLASSIC

- wall and pendant lights
- bulb with E27 socket (not included)
- steel body in black color
- modern wire design

- colour: black
- photovoltaic cell: no
- IP rating: IP44
- material: steel
- power source: 230 V AC
- dimensions: 208 × 160 × 285 mm
- twilight switch: no
- PIR sensor: No
- socket (bulb holder): E27

**ZGD010P**

1/-/-/2

15 54 000 000

ZGD010P

- colour: black
- photovoltaic cell: no
- IP rating: IP44
- material: steel
- power source: 230 V AC
- dimensions: 160 × 160 × 760 mm
- twilight switch: no
- PIR sensor: No
- socket (bulb holder): E27

**ZGD070P**

1/-/-/2

15 54 001 000

ZGD070P

ARTEO

CLASSIC

- wall and post lights
- specific models available with PIR sensor version
- bulb with E27 socket (not included)
- stainless steel body in anthracite color

- colour: anthracite
- photovoltaic cell: no
- IP rating: IP44
- material: stainless steel
- power source: 230 V AC
- dimensions: 164 × 120 × 230 mm
- twilight switch: no
- PIR sensor: No
- socket (bulb holder): E27

**ZGA010P**

1/-/-/4

15 54 000 001

ZGA010P

- colour: anthracite
- photovoltaic cell: no
- IP rating: IP44
- material: stainless steel
- power source: 230 V AC
- dimensions: 120 × 120 × 330 mm
- twilight switch: no
- PIR sensor: No
- socket (bulb holder): E27

**ZGA020P**

1/-/-/4

15 54 000 002

ZGA020P

- colour: anthracite
- photovoltaic cell: no
- IP rating: IP44
- material: stainless steel
- power source: 230 V AC
- dimensions: 164 × 120 × 295 mm
- twilight switch
- PIR sensor: yes
- socket (bulb holder): E27

**ZGA040P**

1/-/-/4

15 54 000 003

ZGA040P

- colour: anthracite
- photovoltaic cell: no
- IP rating: IP44
- material: stainless steel
- power source: 230 V AC
- dimensions: 120 × 120 × 500 mm
- twilight switch: no
- PIR sensor: No
- socket (bulb holder): E27

**ZGA0A0P**

1/-/-/2

15 54 002 000

ZGA0A0P

- colour: anthracite
- photovoltaic cell: no
- IP rating: IP44
- material: stainless steel
- power source: 230 V AC
- dimensions: 120 × 120 × 800 mm
- twilight switch: no
- PIR sensor: No
- socket (bulb holder): E27

**ZGA0C0P**

1/-/-/2

15 54 002 001

ZGA0C0P

ADENIA

CLASSIC

- wall lights
- specific models available with PIR sensor version
- bulb with E27 socket (not included)
- modern aluminum body in black color

- colour: black
- photovoltaic cell: no
- IP rating: IP44
- material: aluminum
- power source: 230 V AC
- dimensions: 198 × 150 × 278 mm
- twilight switch: no
- PIR sensor: No
- socket (bulb holder): E27

**ZGB010P**

1/-/-/2

15 54 000 004

ZGB010P

- colour: black
- photovoltaic cell: no
- IP rating: IP44
- material: aluminum
- power source: 230 V AC
- dimensions: 180 × 150 × 245 mm
- twilight switch: no
- PIR sensor: No
- socket (bulb holder): E27

**ZGB020P**

1/-/-/2

15 54 000 005

ZGB020P

- colour: black
- photovoltaic cell: no
- IP rating: IP44
- material: aluminum
- power source: 230 V AC
- dimensions: 198 × 150 × 298 mm
- twilight switch
- PIR sensor: yes
- socket (bulb holder): E27

**ZGB040P**

1/-/-/2

15 54 000 006

ZGB040P

ZALA

CLASSIC

- wall and post lights
- specific models available with PIR sensor version
- bulb with E27 socket (not included)
- oval stainless steel body in anthracite color

- colour: anthracite
- photovoltaic cell: no
- IP rating: IP44
- material: stainless steel
- power source: 230 V AC
- dimensions: 128 × 80 × 230 mm
- twilight switch: no
- PIR sensor: No
- socket (bulb holder): E27

**ZGC010P**

1/-/-/6

15 54 000 007

ZGC010P

- colour: anthracite
- photovoltaic cell: no
- IP rating: IP44
- material: stainless steel
- power source: 230 V AC
- dimensions: 128 × 80 × 270 mm
- twilight switch
- PIR sensor: yes
- socket (bulb holder): E27

**ZGC040P**

1/-/-/3

15 54 000 008

ZGC040P

- colour: anthracite
- photovoltaic cell: no
- IP rating: IP44
- material: stainless steel
- power source: 230 V AC
- dimensions: 140 × 140 × 500 mm
- twilight switch: no
- PIR sensor: No
- socket (bulb holder): E27

**ZGC0A0P**

1/-/-/2

15 54 002 002

ZGC0A0P

NIKA**CLASSIC**

- wall and post lights
- warm white LED light
- specific models available with PIR sensor version
- anthracite aluminum light body

- colour: anthracite
- photovoltaic cell: no
- IP rating: IP44
- material: aluminum
- power source: 230 V AC
- dimensions: 120 × 120 × 200 mm
- twilight switch: no
- luminous flux: 900 lm
- PIR sensor: No

- color temperature: 3000 K
- light color: Warm White


3 000 K
WARM
WHITE
**ZGE014L**

1/-/-/6

15 54 112 000

ZGE014L

- colour: anthracite
- photovoltaic cell: no
- IP rating: IP44
- material: aluminum
- power source: 230 V AC
- dimensions: 120 × 120 × 200 mm
- twilight switch
- luminous flux: 900 lm
- PIR sensor: yes

- color temperature: 3000 K
- light color: Warm White


3 000 K
WARM
WHITE
**ZGE044L**

1/-/-/6

15 54 112 001

ZGE044L

- colour: anthracite
- photovoltaic cell: no
- IP rating: IP44
- material: aluminum
- power source: 230 V AC
- dimensions: 120 × 120 × 500 mm
- twilight switch: no
- luminous flux: 900 lm
- PIR sensor: No

- color temperature: 3000 K
- light color: Warm White


3 000 K
WARM
WHITE
**ZGE0A4L**

1/-/-/2

15 54 112 200

ZGE0A4L

- colour: anthracite
- photovoltaic cell: no
- IP rating: IP44
- material: aluminum
- power source: 230 V AC
- dimensions: 120 × 120 × 800 mm
- twilight switch: no
- luminous flux: 900 lm
- PIR sensor: No

- color temperature: 3000 K
- light color: Warm White


3 000 K
WARM
WHITE
**ZGE0C4L**

1/-/-/2

15 54 112 201

ZGE0C4L

OCULUS

CLASSIC

- wall lights
- 1 or 2 bulbs with GU10 socket (not included)
- solid plastic body in black color
- use: modern, minimalist look for all house facades

- colour: black
- photovoltaic cell: no
- IP rating: IP44
- material: plastic
- power source: 230 V AC
- dimensions: 88 × 67 × 80 mm
- twilight switch: no
- PIR sensor: No
- socket (bulb holder): GU10

**ZGF010P**

1/-/-/16

15 54 020 000

ZGF010P

- colour: black
- photovoltaic cell: no
- IP rating: IP44
- material: plastic
- power source: 230 V AC
- dimensions: 88 × 67 × 153 mm
- twilight switch: no
- PIR sensor: No
- socket (bulb holder): GU10

**ZGF020P**

1/-/-/8

15 54 020 001

ZGF020P

CASSIA

CLASSIC

- wall lights
- bulb with E27 socket (not included)
- oval aluminum body in anthracite color
- glass diffuser

- colour: anthracite
- photovoltaic cell: no
- IP rating: IP44
- material: aluminum
- power source: 230 V AC
- dimensions: 126 × 95 × 222 mm
- twilight switch: no
- PIR sensor: No
- socket (bulb holder): E27

**ZGG010P**

1/-/-/3

15 54 000 009

ZGG010P

MALVA

CLASSIC

- wall lights
- specific models available with PIR sensor version
- bulb with E27 socket (not included)

- colour: black
- photovoltaic cell: no
- IP rating: IP44
- material: aluminum
- power source: 230 V AC
- dimensions: 130 × 120 × 250 mm
- twilight switch: no
- PIR sensor: No
- socket (bulb holder): E27

**ZGH010P**

1/-/-/4

15 54 000 010

ZGH010P

- colour: black
- photovoltaic cell: no
- IP rating: IP44
- material: aluminum
- power source: 230 V AC
- dimensions: 130 × 120 × 280 mm
- twilight switch
- PIR sensor: yes
- socket (bulb holder): E27

**ZGH040P**

1/-/-/4

15 54 000 011

ZGH040P

TILLIA

CLASSIC

- wall lights
- bulb with E27 socket (not included)
- clay body frame in black color

- colour: black
- photovoltaic cell: no
- IP rating: IP44
- material: aluminum
- power source: 230 V AC
- dimensions: 128 × 110 × 270 mm
- twilight switch: no
- PIR sensor: No
- socket (bulb holder): E27

**ZGI010P**

1/-/-/3

15 54 000 012

ZGI010P

TERION

CLASSIC

- wall and post lights
- integrated PIR sensor
- solar power without the need for electrical connection

- colour: anthracite
- photovoltaic cell: 0,88 W
- IP rating: IP44
- material: stainless steel
- power source: Li-Ion battery 3,7 V/1 200 mAh
- dimensions: 147 × 125 × 146 mm
- twilight switch
- luminous flux: max. 200 lm
- PIR sensor: yes
- color temperature: 3000 K
- light color: Warm White

**ZGJ044S**

1/-/-/4

15 54 202 000

ZGJ044S

- colour: anthracite
- photovoltaic cell: 0,88 W
- IP rating: IP44
- material: stainless steel
- power source: Li-Ion battery 3,7 V/1 200 mAh
- dimensions: 125 × 125 × 500 mm
- twilight switch
- luminous flux: max. 200 lm
- PIR sensor: yes
- color temperature: 3000 K
- light color: Warm White

**ZGJ0B4S**

1/-/-/2

15 54 202 200

ZGJ0B4S

- colour: anthracite
- photovoltaic cell: 0,88 W
- IP rating: IP44
- material: stainless steel
- power source: Li-Ion battery 3,7 V/1 200 mAh
- dimensions: 125 × 125 × 805 mm
- twilight switch
- luminous flux: max. 200 lm
- PIR sensor: yes
- color temperature: 3000 K
- light color: Warm White

**ZGJ0F4S**

1/-/-/2

15 54 202 201

ZGJ0F4S

VEREA

CLASSIC

- wall and post lights
- integrated PIR sensor
- warm white light color

- colour: black
- photovoltaic cell: 2.1 W
- IP rating: IP44
- material: aluminium (Al)
- power source: Li-Ion battery 3.7 V/2 200 mAh
- dimensions: 154 × 107 × 130 mm
- twilight switch
- luminous flux: max. 460 lm
- PIR sensor: yes
- color temperature: 3000 K
- light color: Warm White

**ZGK044S**

1/-/-/4

15 54 204 000

ZGK044S



- colour: black
- photovoltaic cell: 2.1 W
- IP rating: IP44
- material: aluminium (Al)
- power source: Li-Ion battery 3.7 V/2 200 mAh
- dimensions: 154 × 107 × 500 mm
- twilight switch
- luminous flux: max. 460 lm
- PIR sensor: yes
- color temperature: 3000 K
- light color: Warm White

**ZGK0B4S**

1/-/-/4

15 54 204 200

ZGK0B4S



LANA

CLASSIC

- wall and post lights
- bulb with E27 socket (not included)
- solid aluminum body in anthracite color

- colour: anthracite
- photovoltaic cell: no
- IP rating: IP54
- material: aluminum
- power source: 230 V AC
- dimensions: 119 × 106 × 218 mm
- twilight switch: no
- PIR sensor: No
- socket (bulb holder): E27

**ZGL010P**

1/-/-/8

15 54 000 013

ZGL010P





- colour: anthracite
- photovoltaic cell: no
- IP rating: IP54
- material: aluminum
- power source: 230 V AC
- dimensions: 106 × 88 × 286 mm
- twilight switch: no
- PIR sensor: No
- socket (bulb holder): E27



ZGL020P	1/-/-/8
15 54 000 014	ZGL020P

- colour: anthracite
- photovoltaic cell: no
- IP rating: IP54
- material: aluminum
- power source: 230 V AC
- dimensions: 154 × 133 × 450 mm
- twilight switch: no
- PIR sensor: No
- socket (bulb holder): E27



ZGL0A0P	1/-/-/2
15 54 002 003	ZGL0A0P

- colour: anthracite
- photovoltaic cell: no
- IP rating: IP54
- material: aluminum
- power source: 230 V AC
- dimensions: 154 × 133 × 750 mm
- twilight switch: no
- PIR sensor: No
- socket (bulb holder): E27



ZGL0C0P	1/-/-/2
15 54 002 004	ZGL0C0P

Luminaires

Garden Lighting

ESSENTIAL

LUMI

ESSENTIAL

- integrated PIR sensor for motion detection
- zero energy consumption from the grid
- 2 light modes
- IP54 rating ensures water resistance
- use: permanent outdoor lighting

- luminous flux: 240 lm
- color temperature: 4 000 K
- light color: neutral white
- color rendering index (CRI): Ra > 80
- voltage: 3.7 V
- IP rating: IP54
- beam angle: 120°
- dimensions: 105 × 130 × 80 mm
- battery: Li-Ion 1 200 mAh

- AKU lighting time: 10 hours
- detection range of PIR Sensor: 5 m
- body material: plastic (ABS+PC)
- packaging: 1 pc, box



240 lm



IP54



Outdoor

PIR sensor
120°/1-5 mNEUTRAL
WHITESOLAR
CHARGING

8 592920 132722

ZG172S

15 53 172 000

1/-/-12

WALL LAMP

Luminaires

Desk and Floor Lamps

- stylish table or floor lamps
- suitable for the study or children's room
- selected models allow wireless charging of mobile phones, night light function, timer or dimming function
- retro lamps with E27 base

- model: AMY
- power: 5 W
- luminous flux: 200 lm
- colour: white
- supply cable length: 1.2 m
- power adaptor: USB
- color temperature: 3 000–6 500 K
- dimensions: 250 × 240 mm
- color rendering index (CRI): Ra >80

- packaging: 1 pc, box

**Z7631**

1/-/-/8

15 38 198 000

Z7631

- model: JASON
- power: 2.2 W
- luminous flux: 180 lm
- colour: black
- supply cable length: 1.5 m
- power adaptor: USB
- color temperature: 3 000/4 000/5 000 K
- dimensions: 270 × 130 mm
- USB port

- color rendering index (CRI): Ra >80
- packaging: 1 pc, box

**Z7633**

1/-/-/2

15 38 199 000

Z7633

- model: GRACE
- power: 4.2 W
- luminous flux: 80 lm
- colour: black
- supply cable length: 1.5 m
- power adaptor: USB
- power adaptor included
- color temperature: 4 000 K
- dimensions: 350 × 130 mm

- USB port
- color rendering index (CRI): Ra >80
- packaging: 1 pc, box

**Z7634**

1/-/-/4

15 38 200 000

Z7634

- model: SOPHIE
- power: 4.2 W
- luminous flux: 200 lm
- colour: black
- supply cable length: 1.5 m USB
- power adaptor: USB
- power adaptor included
- color temperature: 4 000 K
- dimensions: 400 × 110 mm

- USB port
- color rendering index (CRI): Ra >80
- packaging: 1 pc, box

**Z7635B**

1/-/-/10

15 38 200 100

Z7635B

- model: SOPHIE
- power: 4.2 W
- luminous flux: 200 lm
- colour: white
- supply cable length: 1.5 m USB
- power adaptor: USB
- power adaptor included
- color temperature: 4 000 K
- dimensions: 400 × 110 mm

- USB port
- color rendering index (CRI): Ra >80
- packaging: 1 pc, box

**Z7635W**

1/-/-/10

15 38 200 200

Z7635W

- model: ABBIE
- power: 6 W
- luminous flux: 300 lm
- colour: white
- supply cable length: 1,3 m
- power adaptor: USB
- power adaptor included
- color temperature: 3 000/4 000/6 500 K
- dimensions: 250 × 100 mm

- USB port
- color rendering index (CRI): Ra >80
- packaging: 1 pc, box

**Z7636W**

1/-/-/8

15 38 200 300

Z7636W

- model: ABBIE
- power: 6 W
- luminous flux: 300 lm
- colour: black
- supply cable length: 1,3 m
- power adaptor: USB
- power adaptor included
- color temperature: 3 000/4 000/6 500 K
- dimensions: 250 × 100 mm

- USB port
- color rendering index (CRI): Ra >80
- packaging: 1 pc, box

**Z7636B**

1/-/-/8

15 38 200 400

Z7636B

- model: OSCAR
- power: 5.5 W
- luminous flux: 360 lm
- colour: black
- supply cable length: 1.5 m
- power adaptor: 12 V/2 A
- power adaptor included
- color temperature: 3 000/4 000/5 700 K
- dimensions: 30 cm

- color rendering index (CRI): Ra > 90
- packaging: 1 pc, box

**Z7637B**

1/-/-/2

15 38 200 500

Z7637B

- model: OSCAR
- power: 5.5 W
- luminous flux: 360 lm
- colour: white
- supply cable length: 1.5 m
- power adaptor: 12 V/2 A
- power adaptor included
- color temperature: 3 000/4 000/5 700 K
- dimensions: 30 cm

- color rendering index (CRI): Ra > 90
- packaging: 1 pc, box

**Z7637W**

1/-/-/2

15 38 200 600

Z7637W

- power adaptor: 10 V/1 A
- model: MOLLY
- power: 12 W
- luminous flux: 650 lm
- colour: black
- power adaptor included
- color temperature: 3 000/4 000/6 500 K
- dimensions: 30 cm
- color rendering index (CRI): Ra >80

- packaging: 1 pc, box

**Z7638B**

1/-/-/4

15 38 200 700

Z7638B

- power adaptor: 10 V/1 A
- model: MOLLY
- power: 12 W
- luminous flux: 650 lm
- colour: white
- power adaptor included
- color temperature: 3 000/4 000/6 500 K
- dimensions: 30 cm
- color rendering index (CRI): Ra >80

- packaging: 1 pc, box

**Z7638W**

1/-/-/4

15 38 200 800

Z7638W

- model: KYLE
- power: 5.5 W
- luminous flux: 300 lm
- colour: black
- supply cable length: 1.5 m
- power adaptor: 10 V/3 000 mA
- power adaptor included
- color temperature: 2 700-4 500 K
- dimensions: 350 mm

- USB port: yes + wireless connection
- color rendering index (CRI): Ra > 90
- packaging: 1 pc, box

**Z7639**

1/-/-/2

15 38 200 900

Z7639


Luminaires

LED strips

LED strips GoSmart



- Remote control or mobile app operation
- Dimming and RGB color change options
- Use: lighting for modern interiors and representative spaces
- Connection to home network via WiFi
- Compatibility with EMOS GoSmart products and TUYA devices
- Voice control with Google Assistant and Amazon Alexa



- protocol: WIFI + BLE
- power: 11 W
- luminous flux: 750 lm
- color temperature: 2 700–6 500 K
- light color: warm white-cool white
- luminous efficacy: 63 lm/W
- colour settings (RGB)
- supported OS: iOS, Android
- transmission frequency: 2.4 GHz WiFi
- compatibility: EMOS GoSmart, Tuya, Lidl, Smartlife
- IP rating: IP20/IP44
- length: 2 m
- width: 12 mm
- supply line length: 1.5 m
- number of segments: 10
- maximum number of segments: 10



450 lm



2 m



11 W

3
YEARS
WARRANTYDIMMABLE
10%–100%

CCT



RGB



8 592920 120446

ZPW218R

1/-/4/12

15 51 021 800

ZPW218R

- protocol: WIFI + BLE
- power: 21 W
- luminous flux: 1 400 lm
- color temperature: 2 700–6 500 K
- light color: warm white-cool white
- luminous efficacy: 62 lm/W
- colour settings (RGB)
- supported OS: iOS, Android
- transmission frequency: 2.4 GHz WiFi
- compatibility: EMOS GoSmart, Tuya, Lidl, Smartlife
- IP rating: IP20/IP44
- length: 5 m
- width: 12 mm
- supply line length: 1.5 m
- number of segments: 25
- maximum number of segments: 25



1 000 lm



5 m



22 W

3
YEARS
WARRANTYDIMMABLE
10%–100%

CCT



RGB



8 592920 120460

ZPW518R

1/-/4/8

15 51 051 800

ZPW518R

- protocol: WIFI + BLE
- power: 23 W
- light color: RGB
- colour settings (RGB)
- supported OS: iOS, Android
- transmission frequency: 2.4 GHz WiFi
- compatibility: EMOS GoSmart, Tuya, Lidl, Smartlife
- IP rating: IP20
- length: 3 000 mm
- width: 80 mm
- supply line length: 1.6 m

16 million
colors

RGB IC

Segmented
colorsVarious
shapesSound
syncSmart
scenariosDIMMABLE
0%–100%

RGB



8 592920 139448

ZPW313I

1/-/-/5

15 55 313 000

ZPW313I

- protocol: WiFi + BLE
- power: 33 W
- light color: RGB
- colour settings (RGB)
- supported OS: iOS, Android
- transmission frequency: 2.4 GHz WiFi
- compatibility: EMOS GoSmart, Tuya, Lidl, Smartlife
- IP rating: IP20
- length: 5 000 mm

- width: 80 mm
- supply line length: 1.6 m



DIMMABLE

0% - 100%

RGB



8 592920 139462

ZPW513I

15 55 513 000

1/-/-/4


ZPW513I

Luminaires

Ambient Lighting GoSmart



- Control via mobile phone app
- Dimmable and RGB colour changing
- Application: lighting of modern interiors and reception areas
- Connection to home network via WiFi
- Compatibility with EMOS GoSmart products and TUYA devices
- Voice control with Google Assistant and Amazon Alexa



- protocol: WiFi + BLE
- power: 24 W
- luminous flux: 450 lm
- light color: RGB
- luminous efficacy: 18.75 lm/W
- colour settings (RGB)
- supported OS: iOS, Android
- transmission frequency: 2.4 GHz WiFi
- compatibility: EMOS GoSmart, Tuya, Lidl, Smartlife

- width: 1170 mm
- supply line length: 2.5 m
- number of segments: 72



8 592920 138809

ZTV55

15 51 550 000

1/-/-/3

AMB-1055

- protocol: WiFi + BLE
- power: 24 W
- luminous flux: 610 lm
- light color: RGB
- luminous efficacy: 25.4 lm/W
- colour settings (RGB)
- supported OS: iOS, Android
- transmission frequency: 2.4 GHz WiFi
- compatibility: EMOS GoSmart, Tuya, Lidl, Smartlife

- width: 1390 mm
- supply line length: 2.5 m
- number of segments: 96



8 592920 138823

ZTV65

15 51 650 000

1/-/-/3

AMB-1065

- protocol: WIFI + BLE
- power: 24 W
- luminous flux: 660 lm
- light color: RGB
- luminous efficacy: 27.5 lm/W
- colour settings (RGB)
- supported OS: iOS, Android
- transmission frequency: 2.4 GHz WiFi
- compatibility: EMOS GoSmart, Tuya, Lidl, Smartlife
- width: 1610 mm
- supply line length: 2.5 m
- number of segments: 120

**ZTV75**

15 51 750 000

1/-/-/3

AMB-1075

- protocol: WIFI + BLE
- power: 7 W
- color temperature: 3 000–6 500 K
- light color: warm white-cool white
- colour settings (RGB)
- supported OS: iOS, Android
- transmission frequency: 2.4 GHz WiFi
- compatibility: EMOS GoSmart, Tuya, Lidl, Smartlife
- IP rating: IP20
- length: 2 550 mm
- supply line length: 2 m
- number of segments: 12
- maximum number of segments: 24

**DIMMABLE**
0%–100%**CCT****RGB****ZIW15CR**

15 55 015 000

1/-/-/4

ZIW15CR



- protocol: WIFI + BLE
- power: 12 W
- light color: RGB
- colour settings (RGB)
- supported OS: iOS, Android
- transmission frequency: 2.4 GHz WiFi
- compatibility: EMOS GoSmart, Tuya, Lidl, Smartlife
- IP rating: IP65
- supply line length: 1.5 m
- number of segments: 15
- maximum number of segments: 15

**RGB****ZIW17FR**

15 55 017 000

1/-/-/8

ZIW17FR



- protocol: WIFI + BLE
- power: 19 W
- light color: RGB
- colour settings (RGB)
- supported OS: iOS, Android
- transmission frequency: 2.4 GHz WiFi
- compatibility: EMOS GoSmart, Tuya, Lidl, Smartlife
- IP rating: IP20
- supply line length: 1.5 m
- number of segments: 10
- maximum number of segments: 19

**DIMMABLE**
0%–100%**RGB****ZIW22AR**

15 55 022 000

1/-/-/2

ZIW22AR



- protocol: WIFI + BLE
- power: 24 W
- luminous flux: 1 000 lm
- color temperature: 2 700 K
- light color: warm white, RGB
- luminous efficacy: 50 lm/W
- colour settings (RGB)
- supported OS: iOS, Android
- transmission frequency: 2.4 GHz WiFi
- compatibility: EMOS GoSmart, Tuya, Lidl, Smartlife
- IP rating: IP20
- length: 24 mm
- width: 24 mm
- supply line length: 1.5 m
- number of segments: 4+0+0
- maximum number of segments: 4+0+0

**DIMMABLE**
0%–100%**CCT****RGB****ZCW34BR**

15 55 034 000

1/-/-/2

ZCW34BR



- protocol: WIFI + BLE
- power: 7 W
- luminous flux: 330 lm
- color temperature: 3 000–6 500 K
- light color: warm white–cool white
- luminous efficacy: 47 lm/W
- colour settings (RGB)
- supported OS: iOS, Android
- transmission frequency: 2.4 GHz WiFi
- compatibility: EMOS GoSmart, Tuya, Lidl, Smartlife
- IP rating: IP20
- length: 92 mm
- width: 175 mm
- supply line length: 1.5 m



7 W

DIMMABLE
0%–100%

CCT

RGB

**ZCW11BR**

1/-/-/4

15 55 110 000

ZCW11BR

- protocol: WIFI + BLE
- power: 7 W
- luminous flux: 330 lm
- color temperature: 3 000–6 500 K
- light color: warm white–cool white
- luminous efficacy: 47 lm/W
- colour settings (RGB)
- supported OS: iOS, Android
- transmission frequency: 2.4 GHz WiFi
- compatibility: EMOS GoSmart, Tuya, Lidl, Smartlife
- IP rating: IP20
- length: 92 mm
- width: 175 mm
- supply line length: 1.5 m



7 W

DIMMABLE
0%–100%

CCT

RGB

**ZCW11WR**

1/-/-/4

15 55 111 000

ZCW11WR

- protocol: WIFI + BLE
- power: 1.9 W
- color temperature: 3 000–6 500 K
- light color: warm white–cool white
- colour settings (RGB)
- supported OS: iOS, Android
- transmission frequency: 2.4 GHz WiFi
- compatibility: EMOS GoSmart, Tuya, Lidl, Smartlife
- IP rating: IP20
- length: 850 mm
- number of segments: 4+0+0
- maximum number of segments: 24

16 million
+ colorsDIMMABLE
0%–100%

CCT

RGB

**ZIW154R**

1/-/-/16

15 55 154 000

ZIW154R

- protocol: WIFI + BLE
- power: 5.4 W
- light color: RGB
- colour settings (RGB)
- supported OS: iOS, Android
- transmission frequency: 2.4 GHz WiFi
- compatibility: EMOS GoSmart, Tuya, Lidl, Smartlife
- IP rating: IP20
- number of segments: 3
- maximum number of segments: 19

16 million
+ colorsDIMMABLE
0%–100%

RGB


**ZIW223R**

1/-/-/10

15 55 223 000

ZIW223R

- protocol: WIFI + BLE
- power: 34 W
- light color: RGB
- colour settings (RGB)
- supported OS: iOS, Android
- transmission frequency: 2.4 GHz WiFi
- compatibility: EMOS GoSmart, Tuya, Lidl, Smartlife
- IP rating: IP20
- supply line length: 1.5 m
- number of segments: 18
- maximum number of segments: 18

16 million
+ colorsDIMMABLE
0%–100%

RGB

**ZIW249R**

1/-/-/6

15 55 249 000

ZIW249R

- protocol: WiFi + BLE
- power: 34 W
- light color: RGB
- colour settings (RGB)
- supported OS: iOS, Android
- transmission frequency: 2.4 GHz WiFi
- compatibility: EMOS GoSmart, Tuya, Lidl, Smartlife
- IP rating: IP20
- supply line length: 1.5 m
- number of segments: 18
- maximum number of segments: 18

DIMMABLE
0% - 100%**ZIW269R**

1/-/-/6

15 55 269 000

ZIW269R

- protocol: WiFi + BLE
- power: 5.5 W
- light color: RGB
- colour settings (RGB)
- supported OS: iOS, Android
- transmission frequency: 2.4 GHz WiFi
- compatibility: EMOS GoSmart, Tuya, Lidl, Smartlife
- IP rating: IP20
- supply line length: 1 m
- number of segments: 6
- maximum number of segments: 6

DIMMABLE
0% - 100%**ZIW426R**

1/-/-/6

15 55 426 000

ZIW426R

Luminaires

Batten luminaires

PROFI PLUS

PANO

PROFI PLUS

- option for surface mounting
- easy connection thanks to separate driver
- ready for continuous installation in linear connection
- high light efficiency 135 lm/W
- 5 years warranty
- use: lighting for corridors, supermarkets and warehouses

- color rendering index (CRI): Ra >80
- IP rating: IP20
- clip material: no clips
- voltage: 220-240 V
- packaging: 1 pc, box
- through-wiring
- power: 10-13-16-20 W
- dimensions: 600 × 65 × 66 mm
- working temperature range: -20 °C to +40 °C
- luminous flux: 2 700 lm
- color temperature: 4 000 K
- protection class: I
- beam angle: 120°
- material: plastic/metal

**ZAB101**

1/-/-/12

15 46 101 000

ZAB101

- color rendering index (CRI): Ra >80
- IP rating: IP20
- clip material: no clips
- voltage: 220-240 V
- packaging: 1 pc, box
- through-wiring
- power: 20-25-35-40 W
- dimensions: 1 200 × 65 × 66 mm
- working temperature range: -20 °C to +40 °C

- luminous flux: 5 600 lm
- color temperature: 4 000 K
- protection class: I
- beam angle: 120°
- material: plastic/metal



ZAB102
15 46 102 001

1/-/-/6
ZAB102

- color rendering index (CRI): Ra >80
- IP rating: IP20
- clip material: no clips
- voltage: 220-240 V
- packaging: 1 pc, box
- through-wiring
- power: 25-35-40-50 W
- dimensions: 1 500 × 65 × 66 mm
- working temperature range: -20 °C to +40 °C

- luminous flux: 7 000 lm
- color temperature: 4 000 K
- protection class: I
- beam angle: 120°
- material: plastic/metal



ZAB103
15 46 103 000

1/-/-/6
ZAB103

Luminaires

Batten luminaires

ESSENTIAL

MINO

ESSENTIAL

- option for surface mounting
- easy connection thanks to separate driver
- body and diffuser made of plastic
- use: lighting for corridors, supermarkets, and warehouses

- color rendering index (CRI): Ra >80
- IP rating: IP20
- clip material: no clips
- voltage: 220-240 V~
- packaging: 1 pc, box
- power: 20 W
- dimensions: 600 × 75.5 × 24.5 mm
- working temperature range: -20 °C to +40 °C
- luminous flux: 2 200 lm

- color temperature: 4 000 K
- protection class: II
- beam angle: 120°
- material: plastic (PC)



4 000 K
NEUTRAL
WHITE



ZAB901
15 46 901 000

1/-/-/30
ZAB901

- color rendering index (CRI): Ra >80
- IP rating: IP20
- clip material: no clips
- voltage: 220-240 V~
- packaging: 1 pc, box
- power: 40 W
- dimensions: 1 200 × 75.5 × 24.5 mm
- working temperature range: -20 °C to +40 °C
- luminous flux: 4 400 lm

- color temperature: 4 000 K
- protection class: II
- beam angle: 120°
- material: plastic (PC)



4 000 K
NEUTRAL
WHITE

**ZAB902**

15 46 902 000

1/-/-/30

ZAB902

- color rendering index (CRI): Ra >80
- IP rating: IP20
- clip material: no clips
- voltage: 220-240 V~
- packaging: 1 pc, box
- power: 50 W
- dimensions: 1 500 × 75.5 × 24.5 mm
- working temperature range: -20 °C to +40 °C
- luminous flux: 5 500 lm

- color temperature: 4 000 K
- protection class: II
- beam angle: 120°
- material: plastic (PC)



4 000 K
NEUTRAL
WHITE

**ZAB903**

15 46 903 000

1/-/-/30

ZAB903

Decorations

Classic chains

Classic chains with multifunction

- 8 lighting modes
- timer function for scheduled on/off
- memory of the last selected function
- various lengths 4-50 m, suitable for indoor and outdoor use



8 multifunctional
modes

auto Timer
on/off
6 h ON/18 h OFF

D4AW21

1/-/-/30

15 50 040 041

D4AW21



- product: chain
- light color: warm white
- dimensions: 4 m
- area of use: both outdoor and indoor
- timer
- function: 8 modes (multi-functional)

- number of LED: 40
- supply line length: 5 m
- cable colour: green
- power: 3.6 W
- IP rating: IP44
- lifetime: 10 000 hours

**D4AW22**

1/-/-/30

15 50 040 042

D4AW22



- product: chain
- light color: warm white
- dimensions: 8 m
- area of use: both outdoor and indoor
- timer
- function: 8 modes (multi-functional)

- number of LED: 80
- supply line length: 5 m
- cable colour: green
- power: 3.6 W
- IP rating: IP44
- lifetime: 10 000 hours



D4AW23

1/-/-/25

15 50 040 043

D4AW23



- product: chain
- light color: warm white
- dimensions: 12 m
- area of use: both outdoor and indoor
- timer
- function: 8 modes (multi-functional)

- number of LED: 120
- supply line length: 5 m
- cable colour: green
- power: 3.6 W
- IP rating: IP44
- lifetime: 10 000 hours

**D4AW24**

1/-/-/20

15 50 040 044

D4AW24



- product: chain
- light color: warm white
- dimensions: 18 m
- area of use: both outdoor and indoor
- timer
- function: 8 modes (multi-functional)

- number of LED: 180
- supply line length: 5 m
- cable colour: green
- power: 3.6 W
- IP rating: IP44
- lifetime: 10 000 hours

**D4AW25**

1/-/-/16

15 50 040 045

D4AW25



- product: chain
- light color: warm white
- dimensions: 24 m
- area of use: both outdoor and indoor
- timer
- function: 8 modes (multi-functional)

- number of LED: 240
- supply line length: 5 m
- cable colour: green
- power: 3.6 W
- IP rating: IP44
- lifetime: 10 000 hours

**D4AW26**

1/-/-/6

15 50 040 046

D4AW26



- product: chain
- light color: warm white
- dimensions: 50 m
- area of use: both outdoor and indoor
- timer
- function: 8 modes (multi-functional)

- number of LED: 500
- supply line length: 5 m
- cable colour: green
- power: 6 W
- IP rating: IP44
- lifetime: 10 000 hours

**D4AC21**

1/-/-/30


15 50 042 024

D4AC21



- product: chain
- light color: cool white
- dimensions: 4 m
- area of use: both outdoor and indoor
- timer
- function: 8 modes (multi-functional)

- number of LED: 40
- supply line length: 5 m
- cable colour: green
- power: 3.6 W
- IP rating: IP44
- lifetime: 10 000 hours

**D4AC22**

1/-/-/30

15 50 042 025

D4AC22



- product: chain
- light color: cool white
- dimensions: 8 m
- area of use: both outdoor and indoor
- timer
- function: 8 modes (multi-functional)

- number of LED: 80
- supply line length: 5 m
- cable colour: green
- power: 3.6 W
- IP rating: IP44
- lifetime: 10 000 hours

**D4AC23**

1/-/-/25


15 50 042 026

D4AC23



- product: chain
- light color: cool white
- dimensions: 12 m
- area of use: both outdoor and indoor
- timer
- function: 8 modes (multi-functional)

- number of LED: 120
- supply line length: 5 m
- cable colour: green
- power: 3.6 W
- IP rating: IP44
- lifetime: 10 000 hours

**D4AC24**

1/-/-/20

15 50 042 027

D4AC24



- product: chain
- light color: cool white
- dimensions: 18 m
- area of use: both outdoor and indoor
- timer
- function: 8 modes (multi-functional)

- number of LED: 180
- supply line length: 5 m
- cable colour: green
- power: 3.6 W
- IP rating: IP44
- lifetime: 10 000 hours

**D4AC25**

1/-/-/16


15 50 042 028

D4AC25



- product: chain
- light color: cool white
- dimensions: 24 m
- area of use: both outdoor and indoor
- timer
- function: 8 modes (multi-functional)

- number of LED: 240
- supply line length: 5 m
- cable colour: green
- power: 3.6 W
- IP rating: IP44
- lifetime: 10 000 hours

**D4AC26**

1/-/-/6

15 50 042 029

D4AC26



- product: chain
- light color: cool white
- dimensions: 50 m
- area of use: both outdoor and indoor
- timer
- function: 8 modes (multi-functional)

- number of LED: 500
- supply line length: 5 m
- cable colour: green
- power: 6 W
- IP rating: IP44
- lifetime: 10 000 hours



D4AM21

1/-/-/30

15 50 044 033

D4AM21



- product: chain
- light color: multicolor
- dimensions: 4 m
- area of use: both outdoor and indoor
- timer
- function: 8 modes (multi-functional)

- number of LED: 40
- supply line length: 5 m
- cable colour: green
- power: 3.6 W
- IP rating: IP44
- lifetime: 10 000 hours

**D4AM22**

1/-/-/30

15 50 044 034

D4AM22



- product: chain
- light color: multicolor
- dimensions: 8 m
- area of use: both outdoor and indoor
- timer
- function: 8 modes (multi-functional)

- number of LED: 80
- supply line length: 5 m
- cable colour: green
- power: 3.6 W
- IP rating: IP44
- lifetime: 10 000 hours

**D4AM23**

1/-/-/25

15 50 044 035

D4AM23



- product: chain
- light color: multicolor
- dimensions: 12 m
- area of use: both outdoor and indoor
- timer
- function: 8 modes (multi-functional)

- number of LED: 120
- supply line length: 5 m
- cable colour: green
- power: 3.6 W
- IP rating: IP44
- lifetime: 10 000 hours

**D4AM24**

1/-/-/20

15 50 044 036

D4AM24



- product: chain
- light color: multicolor
- dimensions: 18 m
- area of use: both outdoor and indoor
- timer
- function: 8 modes (multi-functional)

- number of LED: 180
- supply line length: 5 m
- cable colour: green
- power: 3.6 W
- IP rating: IP44
- lifetime: 10 000 hours

**D4AM25**

1/-/-/16

15 50 044 037

D4AM25



- product: chain
- light color: multicolor
- dimensions: 24 m
- area of use: both outdoor and indoor
- timer
- function: 8 modes (multi-functional)

- number of LED: 240
- supply line length: 5 m
- cable colour: green
- power: 3.6 W
- IP rating: IP44
- lifetime: 10 000 hours

**D4AM26**

1/-/-/6

15 50 044 038

D4AM26



- product: chain
- light color: multicolor
- dimensions: 50 m
- area of use: both outdoor and indoor
- timer
- function: 8 modes (multi-functional)

- number of LED: 500
- supply line length: 5 m
- cable colour: green
- power: 6 W
- IP rating: IP44
- lifetime: 10 000 hours



Decorations

Cherry chains

Cherry chains with multifunction

- 8 lighting modes
- timer function for scheduled on/off
- memory of the last selected function
- various lengths 4-48 m, suitable for indoor and outdoor use


8 multifunctional
modes
 **Timer**
auto on/off
6 h ON/18 h OFF

D5AW22

1/-/-/24

15 50 050 010

D5AW22



8 592920 146705



- product: chain
- light color: warm white
- dimensions: 8 m
- area of use: both outdoor and indoor
- timer
- function: 8 modes (multi-functional)

- number of LED: 80
- supply line length: 5 m
- cable colour: green
- power: 3.6 W
- IP rating: IP44
- lifetime: 10 000 hours

D5AW23

1/-/-/12

15 50 050 011

D5AW23



8 592920 146408



- product: chain
- light color: warm white
- dimensions: 20 m
- area of use: both outdoor and indoor
- timer
- function: 8 modes (multi-functional)

- number of LED: 200
- supply line length: 5 m
- cable colour: green
- power: 3.6 W
- IP rating: IP44
- lifetime: 10 000 hours

D5AW24

1/-/-/8

15 50 050 012

D5AW24



8 592920 146521



- product: chain
- light color: warm white
- dimensions: 30 m
- area of use: both outdoor and indoor
- timer
- function: 8 modes (multi-functional)

- number of LED: 300
- supply line length: 5 m
- cable colour: green
- power: 6 W
- IP rating: IP44
- lifetime: 10 000 hours

D5AW25

1/-/-/6

15 50 050 013

D5AW25



8 592920 146620



- product: chain
- light color: warm white
- dimensions: 48 m
- area of use: both outdoor and indoor
- timer
- function: 8 modes (multi-functional)

- number of LED: 480
- supply line length: 5 m
- cable colour: green
- power: 9 W
- IP rating: IP44
- lifetime: 10 000 hours

D5AC22


1/-/-/24

15 50 052 011

D5AC22



8 592920 146781



- product: chain
- light color: cool white
- dimensions: 8 m
- area of use: both outdoor and indoor
- timer
- function: 8 modes (multi-functional)

- number of LED: 80
- supply line length: 5 m
- cable colour: green
- power: 3.6 W
- IP rating: IP44
- lifetime: 10 000 hours

D5AC23


1/-/-/12

15 50 052 012

D5AC23



8 592920 146361



- product: chain
- light color: cool white
- dimensions: 20 m
- area of use: both outdoor and indoor
- timer
- function: 8 modes (multi-functional)

- number of LED: 200
- supply line length: 5 m
- cable colour: green
- power: 3.6 W
- IP rating: IP44
- lifetime: 10 000 hours

D5AC24

1/-/-/8


15 50 052 013

D5AC24



- product: chain
- light color: cool white
- dimensions: 30 m
- area of use: both outdoor and indoor
- timer
- function: 8 modes (multi-functional)

- number of LED: 300
- supply line length: 5 m
- cable colour: green
- power: 6 W
- IP rating: IP44
- lifetime: 10 000 hours

**D5AC25**

1/-/-/6


15 50 052 014

D5AC25



- product: chain
- light color: cool white
- dimensions: 48 m
- area of use: both outdoor and indoor
- timer
- function: 8 modes (multi-functional)

- number of LED: 480
- supply line length: 5 m
- cable colour: green
- power: 9 W
- IP rating: IP44
- lifetime: 10 000 hours

**D5AM22**

1/-/-/24

15 50 054 012

D5AM22



- product: chain
- light color: multicolor
- dimensions: 8 m
- area of use: both outdoor and indoor
- timer
- function: 8 modes (multi-functional)

- number of LED: 80
- supply line length: 5 m
- cable colour: green
- power: 3.6 W
- IP rating: IP44
- lifetime: 10 000 hours

**D5AM23**

1/-/-/12

15 50 054 013

D5AM23



- product: chain
- light color: multicolor
- dimensions: 20 m
- area of use: both outdoor and indoor
- timer
- function: 8 modes (multi-functional)

- number of LED: 200
- supply line length: 5 m
- cable colour: green
- power: 3.6 W
- IP rating: IP44
- lifetime: 10 000 hours

**D5AM24**

1/-/-/8

15 50 054 014

D5AM24



- product: chain
- light color: multicolor
- dimensions: 30 m
- area of use: both outdoor and indoor
- timer
- function: 8 modes (multi-functional)

- number of LED: 300
- supply line length: 5 m
- cable colour: green
- power: 6 W
- IP rating: IP44
- lifetime: 10 000 hours

**D5AM27**

1/-/-/6


15 50 054 015

D5AM27



- product: chain
- light color: multicolor
- dimensions: 48 m
- area of use: both outdoor and indoor
- timer
- function: 8 modes (multi-functional)

- number of LED: 480
- supply line length: 5 m
- cable colour: green
- power: 9 W
- IP rating: IP44
- lifetime: 10 000 hours



Decorations

Decorations

Garlands

- versatile use throughout the house
- easy installation
- ideal for creating a festive and cozy atmosphere
- timer function – decorations turn on and off by themselves

- product: garland
- light color: warm white
- timer
- remote control: no
- dimensions: 120 cm
- area of use: indoor
- power supply type: battery 3× AA (not included)
- number of LED: 40
- supply line length: 0.3 m

- power: 0.45 W
- IP rating: IP20
- lifetime: 10 000 hours



DCGW15	1/-/-/60
15 50 000 171	DCGW15

- product: garland
- light color: warm white
- timer
- remote control: no
- dimensions: 8 × 8 × 150 cm
- area of use: indoor
- power supply type: battery 3× AA (not included)
- number of LED: 25
- supply line length: 25 cm

- power: 0.2 W
- IP rating: IP20
- lifetime: 10 000 hours



DCTW27	1/-/-/8
15 50 000 184	DCTW27

- product: garland
- light color: warm white
- timer
- remote control: no
- dimensions: 120 cm
- area of use: indoor
- power supply type: battery 3× AA (not included)
- number of LED: 40
- supply line length: 0.3 m

- power: 0.45 W
- IP rating: IP20
- lifetime: 10 000 hours



DCGW16	1/-/-/60
15 50 000 188	DCGW16

Svícny

- beautiful decoration for a window or festive table
- LED with warm white light creates a pleasant atmosphere
- great gift for your loved ones
- designed for indoor use

- product: candlestick
- light color: warm white
- timer
- remote control: no
- dimensions: 38 × 6 × 40,5 cm
- area of use: indoor
- power supply type: battery 2× AA (not included)
- number of LED: 6
- power: 0.36 W
- IP rating: IP20
- lifetime: 10 000 hours

**DCAW24**

1/-/-/3

15 50 000 170

DCAW24



Paper and cotton decorations

- suitable for festive occasions
- use in modern and classic interiors
- recyclable, environmentally friendly
- timer function – decorations turn on and off by themselves
- compact

- product: christmas tree
- light color: warm white
- timer
- remote control: no
- dimensions: 22 × 22 × 30 cm
- area of use: indoor
- power supply type: battery 3× AA (not included)
- number of LED: 10
- power: 0.45 W
- IP rating: IP20
- lifetime: 10 000 hours

**DCAW21**

1/-/-/12

15 50 000 175

DCAW21



- product: christmas tree
- light color: warm white
- timer
- remote control: no
- dimensions: 9,5 × 9,5 × 14,8 cm
- area of use: indoor
- power supply type: battery 2× AA (not included)
- number of LED: 35
- supply line length: 0.3 m
- power: 0.36 W
- IP rating: IP20
- lifetime: 10 000 hours

**DCAW22**

1/-/-/48

15 50 000 176

DCAW22



- product: angel
- light color: warm white
- timer
- remote control: no
- dimensions: 20/18/28,5 × 28/23/38,5 cm
- area of use: indoor
- power supply type: battery 6× AA (not included)
- number of LED: 2× 10
- power: 2× 0,45 W
- IP rating: IP20
- lifetime: 10 000 hours

**DCAW23**

1/-/-/6

15 50 000 178

DCAW23

LED trees

- ideal for decorating indoor and outdoor spaces
- long lifespan
- versatile use not only for Christmas
- easy maintenance

- product: branches
- light color: warm white
- timer
- remote control: no
- dimensions: 60 cm
- area of use: both outdoor and indoor
- power supply type: battery 3× AA (not included)
- number of LED: 100
- supply line length: 0.5 m
- power: 1.5 W
- IP rating: IP44
- lifetime: 10 000 hours

**DCTW26**

1/-/-/12

15 50 000 180

DCTW26

- product: christmas tree
- light color: warm white
- timer
- remote control: no
- dimensions: 120 cm
- area of use: both outdoor and indoor
- power supply type: AC adapter
- number of LED: 600
- supply line length: 5 m
- power: 3.8 W
- IP rating: IP44
- lifetime: 10 000 hours

**DCTW30**

1/-/-/8

15 50 000 187

DCTW30

- product: christmas tree
- light color: vintage
- timer: no
- remote control: no
- dimensions: 180 cm
- area of use: both outdoor and indoor
- power supply type: AC adapter
- number of LED: 480
- supply line length: 5 m
- power: 7 W
- IP rating: IP44
- lifetime: 10 000 hours

**DCTW32**

1/-/-/2

15 50 000 189

DCTW32

- product: christmas tree
- light color: warm white
- timer
- remote control: no
- dimensions: 50 cm
- area of use: both outdoor and indoor
- power supply type: battery 3× AA (not included)
- number of LED: 30
- supply line length: 15 cm
- power: 0,24 W
- IP rating: IP44
- lifetime: 10 000 hours

**DCTW31**

1/-/-/2

15 50 000 191

DCTW31



LED candles

- selection of decorative (IP20) and cemetery (IP44) candles
- pleasant vintage light ideal for illuminating various spaces
- selected models include a remote control or timer function
- the timer ensures that the candle lights up and turns off again after the set time
- practical power supply with commonly available batteries

- product: candle
- light color: warm white
- timer
- remote control: no
- dimensions: 7.5 × 10/12.5/15 cm
- area of use: indoor
- power supply type: battery 6× AA (not included)
- number of LED: 3× 1
- power: 3× 0.06 W
- IP rating: IP20
- lifetime: 10 000 hours

**DCCW05**

1/-/-/8

15 50 000 181

DCCW05



Other decorations

- creating a Christmas atmosphere and brightening the interior
- timer function – decorations turn on and off by themselves
- versatile use not only for Christmas
- practical power supply with commonly available batteries
- easy installation
- great gift for your loved ones

- product: town
- light color: warm white
- timer
- remote control: no
- dimensions: 60 × 0,5 × 19 cm
- area of use: indoor
- power supply type: battery 2× AA (not included)
- number of LED: 40
- supply line length: 0.3 m
- power: 1.2 W
- IP rating: IP20
- lifetime: 10 000 hours

**DCWW41**

1/-/-/20

15 50 000 169

DCWW41



- product: reindeer
- light color: warm white
- timer
- remote control: no
- dimensions: 14,5 × 2 × 16 cm
- area of use: indoor
- power supply type: battery 2× AAA(included)
- number of LED: 8
- power: 0.36 W

**DCWW42**

12/-/12/24

15 50 000 173

DCWW42



- product: angel
- light color: warm white
- timer
- remote control: no
- dimensions: 14,5 × 2 × 13 cm
- area of use: indoor
- power supply type: battery 2× AAA (not included)
- number of LED: 8
- power: 0.36 W

**DCWW43**

1/-/-/40

15 50 000 174

DCWW43



- product: ball
- light color: warm white
- timer
- remote control: no
- dimensions: 15 cm
- area of use: indoor
- power supply type: battery 3× AA (not included)
- number of LED: 20
- power: 0.45 W

**DCLW35**

1/-/-/4

15 50 000 177

DCLW35



- product: house
- light color: warm white
- timer
- remote control: no
- dimensions: 77 × 60 × 163 mm
- area of use: indoor
- power supply type: battery 1× CR2032 (included)
- number of LED: 1
- power: 0.06 W

**DCLW36**

1/-/-/20

15 50 000 182

DCLW36



- product: house
- light color: warm white
- timer
- remote control: no
- dimensions: 130 × 65 × 179 mm
- area of use: indoor
- power supply type: battery 1× CR2032 (included)
- number of LED: 1
- power: 0.06 W

**DCLW37**

1/-/-/20

15 50 000 183

DCLW37



- product: wreath
- light color: warm white
- timer
- remote control: no
- dimensions: 35 cm
- area of use: indoor
- power supply type: battery 3× AA (not included)
- number of LED: 25
- supply line length: 25 cm
- power: 0.2 W
- IP rating: IP20
- lifetime: 10 000 hours

**DCTW28**

1/-/-/3

15 50 000 185

DCTW28

- product: branches
- light color: warm white
- timer
- remote control: no
- dimensions: 18 × 18 × 30 cm
- area of use: indoor
- power supply type: battery 2× AA (not included)
- number of LED: 14
- supply line length: 25 cm
- power: 0.1 W
- IP rating: IP20
- lifetime: 10 000 hours

**DCTW29**

1/-/-/36

15 50 000 186

DCTW29

- product: ball
- light color: warm white
- timer: no
- remote control: no
- dimensions: 20 cm
- area of use: both outdoor and indoor
- power supply type: AC adapter
- number of LED: 200
- supply line length: 5 m
- power: 2.5 W
- IP rating: IP44
- lifetime: 10 000 hours

**DCTW33**

1/-/-/2

15 50 000 190

DCTW33

Weather stations, thermometers, scales, others



Weather stations

Weather stations

- can assess current weather and forecast
- display temperature and humidity (in and out), time and date
- wireless comm. with up to 3 sensors (powered by AA or AAA)
- large colour display, LED backlight (perm/temp) & projector
- with stand/for hanging on the wall, +battery or mains powered

clock: DCF (radio controlled clock) = the possibility of hanging on the wall = time zones = date = calendar = alarm clock = outdoor temperature: -40 °C to +70 °C, resolution 0.1 °C = indoor temperature: -10 °C to +50 °C, resolution 0.1 °C = outdoor humidity: 20 % to 95 % RH, resolution 1 % = indoor humidity: 20 % to 95 % RH, resolution 1 % = min. and max. temperature = weather forecast = temperature warning = rain gauge: no = anemometer: no = moon phase = range of the sensor: up to 80 m = possible additional sensor: 3 (E00387, E05018) = power of sensor: 2× 1.5 V AA (not included) = power of station: 3× 1.5 V AA (not included) = main unit size: 215 × 18 × 113 mm

**E0531**

1/-/-/20

26 06 180 000

E0531



clock: DCF (radio controlled clock) = LED backlight display = color backlight display (Black Mask) = time zones = date = calendar = alarm clock = outdoor temperature: -40 °C to +70 °C, resolution 0.1 °C = indoor temperature: 0 °C to +50 °C, resolution 0.1 °C = outdoor humidity: 20 % to 99 % RH, resolution 1 % = indoor humidity: 20 % to 99 % RH, resolution 1 % = min. and max. temperature = weather forecast = barometer = rain gauge: no = anemometer: no = moon phase = range of the sensor: up to 80 m = possible additional sensor: 3 (E00387, E05018) = power of sensor: 2× 1.5 V AAA (not included) = power of station: 2× 1.5 V AAA (not included) = AC adapter: yes, 5 V DC/1 000 mA (included) = main unit size: 155 × 50 × 113 mm

**E8620**

1/-/-/12

26 06 181 000

E8620



clock: DCF (radio controlled clock) = LED backlight display = the possibility of hanging on the wall = color backlight display (Black Mask) = time zones = date = calendar = alarm clock: yes, 2x = outdoor temperature: -40 °C to +70 °C, resolution 0.1 °C = indoor temperature: -10 °C to +50 °C, resolution 0.1 °C = outdoor humidity: 20 % to 95 % RH, resolution 1 % = indoor humidity: 20 % to 95 % RH, resolution 1 % = min. and max. temperature = weather forecast = pressure trend = barometer = rain gauge: no = anemometer: no = range of the sensor: up to 80 m = possible additional sensor: 3 (E00387, E05018) = power of sensor: 2x 1.5 V AAA (not included) = power of station: 3x 1.5 V AAA (not included) = AC adapter: yes, 5 V DC/1 000 mA (included) = main unit size: 198 x 30 x 132 mm

**E8614**

1/-/-/10


26 06 182 000

E8614

Weather stations GoSmart



- Can evaluate current weather and predict its further development
- Display temperature and humidity and exact date and time
- Wireless communication with up to 3 sensors (AA/AAA batteries)
- Large color display, LED backlight (perm/temp) and projection
- Connection to home network via WiFi
- Compatibility with EMOS GoSmart products and TUYA devices
- Voice control with Google Assistant and Amazon Alexa



- clock: wifi
- LED backlight display
- the possibility of hanging on the wall
- color backlight display (Black Mask)
- date
- calendar
- alarm clock
- outdoor temperature: -40 °C to +70 °C, resolution 0.1
- indoor temperature: -10 °C to +50 °C, resolution 0.1
- outdoor humidity: 20 % to 95 % RH, resolution 1 %
- indoor humidity: 20 % to 95 % RH, resolution 1 %
- min. and max. temperature
- weather forecast
- temperature warning
- rain gauge: no
- anemometer: no
- range of the sensor: up to 80 m
- possible additional sensor: 3 (E00387, E05018)

**E8610**

1/-/-/10

26 06 183 000

E8610

Thermometers

Thermometers

- displays indoor & outdoor temperature, some also humidity
- wireless or with probe (wire-connected, out the window)
- measures indoor humidity via integrated sensor in the body
- selected models also feature calendar, alarm and ice warning
- can be hung on a wall, window or stand

thermometer design: wireless = clock: yes, quartz = date = indoor temperature: -10 °C to +50 °C, resolution 0.1 °C = indoor humidity: 1 % to 99 % RH, resolution 1 % = the possibility of hanging on the wall = power of station: 1× 3 V CR2032 (included) = main unit size: 83 × 17 × 88 mm = screen size: 73 × 73 mm



E0522
26 03 204 000
1/5/-/60
E0522

thermometer design: wireless = magnet for fixing = clock: yes, quartz = date = alarm clock = indoor temperature: 0 °C to +50 °C, resolution 0.1 °C = indoor humidity: 10 % to 99 % RH, resolution 1 % = min. and max. temperature = the possibility of hanging on the wall = power of station: 1× 3 V CR2032 (included) = main unit size: 93 × 15 × 73 mm = screen size: 61 × 82 mm




E6210
26 03 205 000
1/-/-/56
E6210

Pet care GoSmart



- Control and monitoring via mobile app
- Dual power supply via power adapter or batteries
- Feeders with container lock function and jammed feed alarm
- Water fountains with 5-layer filter and silent mode option
- Connection to home network via WiFi
- Compatibility with EMOS GoSmart products and TUYA devices



- power source: 5 V/1 A / 3× 1,5 V typ D
- batteries included: no
- product type: smart feeder
- capacity: 4 l
- dimensions: 315 × 314 × 168 mm
- purpose: indoor
- recommendations: small and medium breeds
- one serving: 5 g
- average granule size: 2–15 mm
- colour: black
- source included in packaging
- packaging: 1 pc, box
- supported OS: Android, iOS
- protocol: Wi-Fi
- connectivity: 2.4 GHz
- warranty period: 2 years
- control by voice assistants: no
- other function: removable stainless steel bowl

**H6002**

26 31 600 200

1/-/-/2

PET-102

- power source: 5 V/1 A / 3× 1,5 V typ D
- batteries included: no
- product type: smart feeder with camera
- capacity: 4 l
- dimensions: 315 × 314 × 168 mm
- purpose: indoor
- recommendations: small and medium breeds
- one serving: 5 g
- average granule size: 2–15 mm
- camera resolution: 1 920 × 1 080
- colour: black
- night vision: yes, max. 5 m
- motion detection
- sound detection: no
- camera viewing angle: 118°
- source included in packaging
- packaging: 1 pc, box
- IR CUT

**H6004**

26 31 600 400

1/-/-/2

PET-104

- power source: 5 V/1 A / 4× 1,5 V typ AA
- batteries included: no
- product type: smart feeder with camera
- capacity: 6 l
- dimensions: 190 × 210 × 325 mm
- purpose: indoor
- recommendations: medium and large breeds
- one serving: 5 g
- average granule size: 2–15 mm
- camera resolution: 1 920 × 1 080
- colour: black
- night vision: yes, max. 5 m
- motion detection
- sound detection: no
- camera viewing angle: 117°
- source included in packaging
- packaging: 1 pc, box
- IR CUT

**H6006**

26 31 600 600

1/-/-/2

PET-106

- product type: smart water fountain
- capacity: 2,6 l
- dimensions: 259 × 143 × 170 mm
- power source: 5 V/1 A
- purpose: indoor
- recommendations: small and medium breeds
- colour: grey
- source included in packaging
- packaging: 1 pc, box
- supported OS: Android, iOS
- protocol: Wi-Fi
- cloud storage: no
- connectivity: 2.4 GHz
- warranty period: 2 years
- control by voice assistants: no
- other function: water filtration, filter replacement n
- notifications to the mobile app
- make a call using the button: no

**H6102**

26 31 610 200

1/-/-/2

PET-202

**H6901**

26 31 690 100

1/-/-/20

PET-901

**H6903**

26 31 690 300

1/-/-/20

PET-903



Pet Care

- dual power supply via power adapter or batteries
- feeders with container lock function and jammed feed alarm
- water fountains with 5-layer filter and silent mode option

- power source: 5 V/1 A / 3× 1,5 V typ D
- batteries included: no
- product type: smart feeder
- capacity: 4 l
- dimensions: 315 × 314 × 168 mm
- purpose: indoor
- recommendations: small and medium breeds
- one serving: 5 g
- average granule size: 2-15 mm
- colour: black
- source included in packaging
- packaging: 1 pc, box
- warranty period: 2 years
- other function: removable stainless steel bowl

**H6001**

26 31 600 100

1/-/-/2

PET-101

- product type: water fountain
- capacity: 2,6 l
- dimensions: 259 × 143 × 170 mm
- power source: 5 V/1 A
- purpose: indoor
- recommendations: small and medium breeds
- colour: grey
- source included in packaging
- packaging: 1 pc, box
- warranty period: 2 years
- other function: water filtration

**H6101**

26 31 610 100

1/-/-/2

PET-201



4
PACK

EVERY
2-4 WEEKS




H6901
26 31 690 100

1/-/-/20
PET-901



H6902
26 31 690 200

1/-/-/20
PET-902

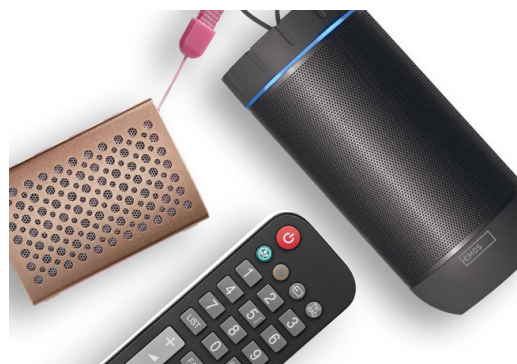

TV and audio accessories

Multimedia players, radios

- Supports DAB, DAB+, and FM broadcasting
- Crystal clear sound
- Long battery life, can be powered via USB cable
- Save favorite stations
- Wireless connection to Bluetooth devices

antenna: telescopic antenna = bluetooth for connecting e.g. phone, tablet = tuner frequency: 87.5–108 Mhz/174.9–239.2 Mhz = power supply: 4× AA 1.5 V (battery) = MP3 support = packaging: 1 pc, box = speaker: 50 mm/4 Ohm/3 W = dimensions: 190 × 91 × 45 mm = USB input = headphone output



BLE

**E0090**

26 18 002 700

1/-/-/6

P-600B

antenna: telescopic antenna = bluetooth for connecting e.g. phone, tablet = tuner frequency: 87.5–108 Mhz/174.9–239.2 Mhz = power supply: 4× AA 1.5 V (battery) = MP3 support = packaging: 1 pc, box = speaker: 50 mm/4 Ohm/3 W = dimensions: 190 × 91 × 45 mm = USB input = headphone output



BLE

**E0091**

26 18 002 800

1/-/-/6

P-600W

Universal remote controllers OFA

- 100 % guaranteed compatibility with your devices
- controller pairs with most devices due to vast code database
- quality material manufacturing
- service support: +420 581 261 101/e-mail: oneforall@emos.cz

range: 15 m • learning function • weight: 107 g • model line: Essence • power source: 2× AA • code remembered after removing the battery • possible number of controlled devices: 1 • packaging: 1 pc, small paper box • dimensions: 15 × 44 × 225 mm • simple set settings • designed for: TV • code search: manual



8 716 184 076251

KE1212

32 33 012 120

1/-/6/48

URC1212

range: 15 m • macro device mode re-assignment • learning function • weight: 119 g • model line: Essence • power source: 2× AAA • code remembered after removing the battery • possible number of controlled devices: 4 • packaging: 1 pc, small paper box • dimensions: 20 × 46 × 223 mm • simple set settings • designed for: TV, DVB-T, SAT, KAB TV, IPTV, DVD, Blu-ray, Amplifier, Tuner, Home Cinema, CD, iPod Dock • code search: manual



8 716 184 076282

KE1242

32 33 012 420

1/-/6/48

URC1242

range: 15 m • macro device mode re-assignment • learning function • weight: 119 g • model line: Essence • power source: 2× AAA • code remembered after removing the battery • possible number of controlled devices: 8 • packaging: 1 pc, small paper box • dimensions: 20 × 46 × 223 mm • simple set settings • designed for: TV, DVB-T, SAT, KAB TV, IPTV, Amplifier, Tuner, Home cinema, Sound Bar • code search: manual



8 716 184 076312

KE1282

32 33 012 820

1/-/6/48

URC1282

range: 15 m • macro device mode re-assignment • learning function • weight: 195 g • model line: special TV • power source: 2× AAA • code remembered after removing the battery • possible number of controlled devices: 2 • packaging: 1 pc, small paper box • dimensions: 15 × 37 × 228 mm • simple set settings: yes – for audio device • designed for: TV TCL and audio device • code search: readjustment of the code for a particular TCL line



8 716 184 077715

KE4922

32 33 049 220

1/-/3/24

URC4922

Power supply extension cords, cable reels, plugs, accessories



Power supply extension cords and sockets

FRENCH

MOES Extension cords

1-phase 16A with PVC insulation

- PVC-insulated extension leads are ideal for the home
- wire cross-section: 1.5 mm², round sockets, with/without switch
- different lengths, max. load 3 680 W, child socket covers
- in white, black and dark green - they blend in with the interior

P0211U 1/-/12/24 19 02 020 140 P0212U     ▪ length: 1.4 m ▪ number of sockets: 2× 2P + PE ▪ maximum load: 3 680 W ▪ conductor cross section: 1.5 mm² ▪ conductor: H05VV-F3G 1.5 mm² ▪ type of insulation: PVC ▪ children protection ▪ packaging: 1 pc, hanging	P02114 1/5/-/20 19 02 020 141 P02114     ▪ length: 1.4 m ▪ children protection ▪ maximum load: 3 680 W ▪ number of sockets: 2× 2P + PE ▪ packaging: 1 pc, hanging ▪ type of insulation: PVC ▪ conductor: H05VV-F3G 1.0 mm² ▪ conductor cross section: 1.0 mm²
P0211E 1/-/12/24 19 02 020 142 P0212U     ▪ length: 1.4 m ▪ children protection ▪ maximum load: 3 680 W ▪ number of sockets: 2× 2P + PE ▪ packaging: 1 pc, hanging ▪ type of insulation: PVC ▪ conductor: H05VV-F3G 1.5 mm² ▪ conductor cross section: 1.5 mm²	P0212 1/5/-/20 19 02 020 201 P0212     ▪ length: 2 m ▪ children protection ▪ maximum load: 3 680 W ▪ number of sockets: 2× 2P + PE ▪ packaging: 1 pc, hanging ▪ type of insulation: PVC ▪ conductor: H05VV-F3G 1.0 mm² ▪ conductor cross section: 1.0 mm²

**EMOS**

A brand of Legrand


www.emos.eu

Order Code
Item NumberPackaging
Type**P0213**

1/5/-/20

19 02 020 300

P0213



- length: 3 m
- children protection
- maximum load: 2 300 W
- number of sockets: 2× 2P + PE
- packaging: 1 pc, hanging
- type of insulation: PVC
- conductor: H05VV-F3G 1.0 mm²
- conductor cross section: 1.0 mm²

P12114

1/5/-/20

19 02 120 140

P12114




- length: 1.4 m
- children protection
- maximum load: 3 680 W
- number of sockets: 2× 2P + PE
- packaging: 1 pc, hanging
- type of insulation: PVC
- conductor: H05VV-F3G 1.0 mm²
- conductor cross section: 1.0 mm²

P1212

1/5/-/20

19 02 120 201

P1212




- length: 2 m
- children protection
- maximum load: 3 680 W
- number of sockets: 2× 2P + PE
- packaging: 1 pc, hanging
- type of insulation: PVC
- conductor: H05VV-F3G 1.0 mm²
- conductor cross section: 1.0 mm²

P1213

1/5/-/20

19 02 120 300

P1213




- length: 3 m
- children protection
- maximum load: 2 300 W
- number of sockets: 2× 2P + PE
- packaging: 1 pc, hanging
- type of insulation: PVC
- conductor: H05VV-F3G 1.0 mm²
- conductor cross section: 1.0 mm²

P1312FC

1/-/5/10

19 02 130 207

P1312FC



- length: 2 m
- children protection
- maximum load: 3 680 W
- number of sockets: 3× 2P + PE
- packaging: 1 ks, box
- type of insulation: PVC
- conductor: H05VV-F3G
- conductor cross section: 1.5 mm²

P1513FC

1/-/5/10

19 02 150 309

P1513FC




- length: 3 m
- children protection
- maximum load: 3 680 W
- number of sockets: 5× 2P + PE
- packaging: 1 ks, box
- type of insulation: PVC
- conductor: H05VV-F3G
- conductor cross section: 1.5 mm²

P1311PD

1/-/-/10

19 02 330 153

P1311PD




- length: 1.5 m
- number of sockets: 3× 2P + PE
- maximum load: 3 680 W
- conductor cross section: 1.5 mm²
- conductor: H05VV-F
- type of insulation: PVC
- children protection
- packaging: 1 ks, box

Extension Cords GoSmart




- Remote on/off switching of connected appliances
- Overview of electricity consumption of connected appliances
- Scheduling and automatic ON/OFF settings
- Connection to home network via WiFi protocol
- Compatibility with EMOS GoSmart products and TUYA devices
- Voice control with Google Assistant and Amazon Alexa



- length: 2 m
- children protection
- maximum load: 3 680 W
- number of sockets: 4× 2P + PE
- packaging: 1 ks, box
- type of insulation: PVC
- conductor: H05VV-F3G
- conductor cross section: 1.5 mm²
- supported OS: Android, iOS

- compatibility: EMOS GoSmart, TUYA, LIDL, Smartlife,
- protocol: Wi-Fi
- transmission frequency: 2.4 GHz WIFI
- control by voice assistants
- notifications to the mobile app

**P1412SM**

1/-/-/8

19 02 940 203

IP-3012F

Power supply extension cords and sockets

FRENCH

Single socket extension cords

Two-cores PVC


- extension cable with one socket
- length: 1.5 or 5 m, PVC insulation – ideal for the interior
- conductor: 0.75 mm², child socket covers

P01301

1/-/10/60

19 02 010 150

P01301



- length: 1.5 m
- number of sockets: 1
- maximum load: 575 W
- conductor cross section: 0.75 mm²
- conductor: H03VVH2-F
- type of insulation: PVC

- children protection
- packaging: 1 pc, hanging

P01305

1/-/10/30

19 02 010 501

P01305



- length: 5 m
- number of sockets: 1
- maximum load: 575 W
- conductor cross section: 0.75 mm²
- conductor: H03VVH2-F
- type of insulation: PVC

- children protection
- packaging: 1 pc, hanging




Power supply extension cords and sockets

SCHUKO

MOES Extension cords

1-phase 16A with PVC insulation


- extension cables with PVC insulation are ideal for household
- conductor: 1.5 mm² (1.0 mm² up to 2 m) round sockets
- round sockets, with or without switch
- various lengths, max. load: 3 680 W, child socket covers
- in white – to blend discreetly into the interior

P1322 19 22 130 200  8 595025 314062	1/5/-/20 SE1312 		P02214E 19 22 020 141  8 592920 141175	1/-/12/24 P0221U 	
▪ length: 2 m ▪ number of sockets: 3× 2P + PE ▪ voltage/current: 250 V~/16 A max. ▪ maximum load: 3 680 W ▪ type of insulation: PVC ▪ conductor: H05VV-F3G 1 mm²	▪ material of the sockets + plugs: plastic ▪ packaging: 1 pc, hanging		▪ length: 1.4 m ▪ material of the sockets + plugs: plastic ▪ maximum load: 3 680 W ▪ voltage/current: 250 V~/16 A max. ▪ number of sockets: 2× 2P + PE ▪ packaging: 1 pc, hanging	▪ type of insulation: PVC ▪ conductor: H05VV-F3G 1.5 mm²	
P1322CU 19 22 130 203  8 592920 132869	1/5/-/10 P1322CU 				
▪ length: 2 m ▪ number of sockets: 3× 2P + PE ▪ voltage/current: 250 V~/16 A max. ▪ maximum load: 3 680 W ▪ type of insulation: PVC ▪ conductor: H05VV-F3G 1.5 mm²	▪ material of the sockets + plugs: plastic ▪ packaging: 1 pc, hanging				

Extension Cords GoSmart




- Remote on/off switching of connected appliances
- Overview of electricity consumption of connected appliances
- Schedule creation and automatic ON/OFF settings
- Connection to the home network via WIFI protocol
- Compatibility with EMOS GoSmart products and TUYA devices
- Voice control with Google Assistant and Amazon Alexa



- length: 2 m
- children protection
- maximum load: 3 680 W
- number of sockets: 4× 2P + PE
- packaging: 1 ks, box
- type of insulation: PVC
- conductor: H05VV-F3G
- conductor cross section: 1.5 mm²
- supported OS: Android, iOS

- compatibility: EMOS GoSmart, TUYA, LIDL, Smartlife,
- protocol: Wi-Fi
- transmission frequency: 2.4 GHz WIFI
- control by voice assistants
- notifications to the mobile app

**P1422SM**

1/-/-/8

19 22 940 201

IP-3013S

Surge protectors

Surge protectors EMOS FRENCH

- extension cord with surge protector
- protects TV, satellite or laptop from power surges
- EMOS surge protectors have 3 or 6 sockets and 1,5-5 m lead
- max. load: 2 300 W
- black/white design, illuminated switch, child socket covers

- energy absorption: 380 J L-N
- response time: 1 ns
- surge protector indicator
- rated voltage: 250 V~, 50 Hz
- maximum load: 2 300 W
- overload protection: yes, 10 A/ 250V~
- protection level Up: 1.3 kV (L/N)
- packaging: 1 pc, box
- dimensions: 233 × 53 × 40 mm

- conductor: H05VV-F3G 1.0 mm²
- open-circuit voltage UOC: 6 kV (L/N)

**P54013**

1/-/-/15

19 09 030 150

S9P339P

- energy absorption: 380 J L-N
- response time: 1 ns
- surge protector indicator
- rated voltage: 250 V~, 50 Hz
- maximum load: 2 300 W
- overload protection: yes, 10 A/ 250V~
- protection level Up: 1.3 kV (L/N)
- packaging: 1 pc, box
- dimensions: 233 × 53 × 40 mm

- conductor: H05VV-F3G 1.0 mm²
- open-circuit voltage UOC: 6 kV (L/N)



P54014
19 09 030 151

1/-/-/15
S9P339P

- energy absorption: 380 J L-N
- response time: 1 ns
- surge protector indicator
- rated voltage: 250 V~, 50 Hz
- maximum load: 2 300 W
- overload protection: yes, 10 A/ 250V~
- protection level Up: 1.3 kV (L/N)
- packaging: 1 pc, box
- dimensions: 358 × 53 × 40 mm

- conductor: H05VV-F3G 1.0 mm²
- open-circuit voltage UOC: 6 kV (L/N)



P54015
19 09 060 151

1/-/-/10
S9P631P

- energy absorption: 380 J L-N
- response time: 1 ns
- surge protector indicator
- rated voltage: 250 V~, 50 Hz
- maximum load: 2 300 W
- overload protection: yes, 10 A/ 250V~
- protection level Up: 1.3 kV (L/N)
- packaging: 1 pc, box
- dimensions: 358 × 53 × 40 mm

- conductor: H05VV-F3G 1.0 mm²
- open-circuit voltage UOC: 6 kV (L/N)



P54018
19 09 060 152

1/-/-/10
S9P631P

- energy absorption: 380 J L-N
- response time: 1 ns
- surge protector indicator
- rated voltage: 250 V~, 50 Hz
- maximum load: 2 300 W
- overload protection: yes, 10 A/ 250V~
- protection level Up: 1.3 kV (L/N)
- packaging: 1 pc, box
- dimensions: 358 × 53 × 40 mm

- conductor: H05VV-F3G 1.0 mm²
- open-circuit voltage UOC: 6 kV (L/N)



P54016
19 09 060 301

1/-/-/10
S9P631P

- energy absorption: 380 J L-N
- response time: 1 ns
- surge protector indicator
- rated voltage: 250 V~, 50 Hz
- maximum load: 2 300 W
- overload protection: yes, 10 A/ 250V~
- protection level Up: 1.3 kV (L/N)
- packaging: 1 pc, box
- dimensions: 358 × 53 × 40 mm

- conductor: H05VV-F3G 1.0 mm²
- open-circuit voltage UOC: 6 kV (L/N)



P54019
19 09 060 302

1/-/-/10
S9P631P

- energy absorption: 380 J L-N
- response time: 1 ns
- surge protector indicator
- rated voltage: 250 V~, 50 Hz
- maximum load: 2 300 W
- overload protection: yes, 10 A/ 250V~
- protection level Up: 1.3 kV (L/N)
- packaging: 1 pc, box
- dimensions: 358 × 53 × 40 mm
- conductor: H05VV-F3G 1.0 mm²
- open-circuit voltage UOC: 6 kV (L/N)

**P54017**

19 09 060 500

1/-/-/10

S9P631P



Surge protectors EMOS SCHUKO

- extension cable with overvoltage protection
- protects TV, satellite or laptop from mains overvoltage
- black or white design, backlit switch & child socket covers

- energy absorption: 380 J L-N
- response time: 1 ns
- surge protector indicator
- rated voltage: 250 V~, 50 Hz
- maximum load: 2 300 W
- overload protection: yes, 10 A/ 250V~
- protection level Up: 1.3 kV (L/N)
- packaging: 1 pc, box
- dimensions: 233 × 53 × 40 mm
- conductor: H05VV-F3G 1.5 mm²
- open-circuit voltage UOC: 6 kV (L/N)

**P54213**

19 09 030 152

1/-/-/15

S9P338P



- energy absorption: 380 J L-N
- response time: 1 ns
- surge protector indicator
- rated voltage: 250 V~, 50 Hz
- maximum load: 2 300 W
- overload protection: yes, 10 A/ 250V~
- protection level Up: 1.3 kV (L/N)
- packaging: 1 pc, box
- dimensions: 233 × 53 × 40 mm
- conductor: H05VV-F3G 1.5 mm²
- open-circuit voltage UOC: 6 kV (L/N)

**P54214**

19 09 030 153

1/-/-/15

S9P338P



- energy absorption: 380 J L-N
- response time: 1 ns
- surge protector indicator
- rated voltage: 250 V~, 50 Hz
- maximum load: 2 300 W
- overload protection: yes, 10 A/ 250V~
- protection level Up: 1.3 kV (L/N)
- packaging: 1 pc, box
- dimensions: 358 × 53 × 40 mm
- conductor: H05VV-F3G 1.5 mm²
- open-circuit voltage UOC: 6 kV (L/N)

**P54215**

19 09 060 153


1/-/-/10

S9P615P



- energy absorption: 380 J L-N
- response time: 1 ns
- surge protector indicator
- rated voltage: 250 V~, 50 Hz
- maximum load: 2 300 W
- overload protection: yes, 10 A/ 250V~
- protection level Up: 1.3 kV (L/N)
- packaging: 1 pc, box
- dimensions: 358 × 53 × 40 mm

- conductor: H05VV-F3G 1.5 mm²
- open-circuit voltage UOC: 6 kV (L/N)



P54218
19 09 060 154

1/-/-/10
S9P615P



- energy absorption: 380 J L-N
- response time: 1 ns
- surge protector indicator
- rated voltage: 250 V~, 50 Hz
- maximum load: 2 300 W
- overload protection: yes, 10 A/ 250V~
- protection level Up: 1.3 kV (L/N)
- packaging: 1 pc, box
- dimensions: 358 × 53 × 40 mm

- conductor: H05VV-F3G 1.5 mm²
- open-circuit voltage UOC: 6 kV (L/N)




P54216
19 09 060 303

1/-/-/10
S9P615P



- energy absorption: 380 J L-N
- response time: 1 ns
- surge protector indicator
- rated voltage: 250 V~, 50 Hz
- maximum load: 2 300 W
- overload protection: yes, 10 A/ 250V~
- protection level Up: 1.3 kV (L/N)
- packaging: 1 pc, box
- dimensions: 358 × 53 × 40 mm

- conductor: H05VV-F3G 1.5 mm²
- open-circuit voltage UOC: 6 kV (L/N)



P54219
19 09 060 304

1/-/-/10
S9P615P



- energy absorption: 380 J L-N
- response time: 1 ns
- surge protector indicator
- rated voltage: 250 V~, 50 Hz
- maximum load: 2 300 W
- overload protection: yes, 10 A/ 250V~
- protection level Up: 1.3 kV (L/N)
- packaging: 1 pc, box
- dimensions: 358 × 53 × 40 mm

- conductor: H05VV-F3G 1.5 mm²
- open-circuit voltage UOC: 6 kV (L/N)



P54217
19 09 060 501

1/-/-/10
S9P615P



Cable reels

FRENCH

1-phase rubber

- 1-phase extension cable on drum, neoprene/rubber insulation
- resistant to water (IP44), extreme temperatures and oils
- EMOS extension cable with thermal fuse
- stable stand, winding drum and rubberised handle

- length: 25 m
- conductor cross section: 1.0 mm²
- voltage: 230 V
- current: 10 A
- IP rating: IP44
- number of sockets: 4
- thermal fuse
- conductor: H05RR-F3G
- max. reeled load: 4.8 A max./1 100 W

- max. unreeled load: 10 A max./2 300 W
- children protection
- other functions: guiding loop, cable reel brake
- packaging: 1 pc, box

**P084256**

1/-/-/1

19 08 842 500

P084256

1-phase PVC

- 1-phase extension cable on drum with PVC insulation
- EMOS extension cable with thermal fuse
- stable stand, winding drum and rubberized handle

- length: 10 m
- conductor cross section: 1.0 mm²
- voltage: 230 V
- current: 10 A
- IP rating: IP20
- number of sockets: 4
- thermal fuse
- conductor: H05VV-F3G
- max. reeled load: 4 A max./920 W

- max. unreeled load: 10 A max./2 300 W
- children protection
- packaging: 1 pc, box

**P19410N**

1/-/-/6

19 08 141 001

P19410N

Cable reels

SCHUKO

1-phase rubber

- 1phase extension cable on reel w/ neoprene/rubber insulation
- immune to water (IP44), extreme temperatures and oils
- power extension cable reel with thermal fuse
- stable stand, reel and rubber-coated grip

- length: 25 m
- conductor cross section: 1.0 mm²
- voltage: 230 V
- current: 10 A
- IP rating: IP44
- number of sockets: 4
- thermal fuse
- conductor: H05RR-F3G
- max. reeled load: 4.8 A max./1 100 W
- max. unreeled load: 10 A max./2 300 W
- children protection
- other functions: guiding loop, cable reel brake
- packaging: 1 pc, box

**P082251**

1/-/-/1

19 28 842 500

P082251

Sockets, plugs, adaptors, timers, others

Adaptors

- splitter sockets with 1–3 outlets, fitted with child covers
- enable connecting multiple devices into one socket
- max. load 3 680 W, IP20 enclosure
- for connecting devices with round or flat plugs
- with or without switch

P0074

1/-/6/72

19 05 010 005

P0074



8 592920 144817

16 A



IP20



children protection = IP rating: IP20 = material: plastic = maximum load: 3 680 W = voltage/current: 250 V~/16 A max. = packaging: 1 pc, hanging = product: adapter plug 1× + 1× USB-A + 1× USB-C 5.0 V, 3.0 A, 15 W max.

P0076PD

1/-/6/36

19 05 020 030

P0076PD



8 592920 144848

16 A



IP20



children protection = IP rating: IP20 = material: plastic = maximum load: 3 680 W = voltage/current: 250 V~/16 A max. = packaging: 1 pc, hanging = product: adapter plug 2× + 1× USB-A (QC 20 W) + 1× USB-C (PD 20 W)

P0024FR

1/-/10/80

19 05 030 080

P0024FR



8 592920 137987

16 A



IP20



children protection = IP rating: IP20 = material: plastic = maximum load: 3 680 W = voltage/current: 250 V~/16 A max. = packaging: 1 pc, hanging = product: adapter plug 3×

P0073

1/-/5/30

19 05 120 040

P0073



8 592920 140000

16 A



IP20



children protection = IP rating: IP20 = material: plastic = maximum load: 3 680 W = voltage/current: 250 V~/16 A max. = packaging: 1 pc, hanging = product: adapter plug 2×+1×USB-A+1×USB-C 5 V DC 3,4 A max. 17 W

P0075

1/-/6/72

19 25 010 000

P0075



8 592920 144787

16 A



IP20



children protection = IP rating: IP20 = material: plastic = voltage/current: 250 V~/16 A max. = packaging: 1 pc, hanging = product: adapter plug 1× + 1× USB-A + 1× USB-C

P0077PD

1/-/6/36

19 25 020 001

P0077PD



8 592920 144879

16 A



IP20



children protection = IP rating: IP20 = material: plastic = voltage/current: 250 V~/16 A max. = packaging: 1 pc, hanging = product: adapter plug 2× + 1× USB-A (QC 20 W) + 1× USB-C (PD 20 W)

Timers

- socket with timer automatically turns appliance on/off
- ideal for aquariums, terrariums, pool pumps and lighting
- practical digital timers sockets
- digital timer to plan out your week using 10 programmes
- can handle a max. load of 3 680 W

- type: digital
- voltage/current: 230 V~/16(2) A max.
- maximum load: 3 680 W
- minimal time setting: 1 minute
- switching: phase conductor
- number of programs: 10
- number of switching per day: 10
- function to change summer/winter time
- IP rating: IP44

- packaging: 1 pc, box

3 680 W
max.



P5507N
19 07 110 040

1/-/4/12
P5507N



- type: digital
- outdoor using
- voltage/current: 230 V~/16(2) A max.
- maximum load: 3 680 W
- minimal time setting: 1 minute
- option of manual switch-on
- number of programs: 10
- number of switching per day: 10
- function to change summer/winter time

- IP rating: IP44
- packaging: 1 pc, box

3 680 W
max.



P5525N
19 27 110 034

1/-/4/12
P5525N



Cables




Data cables UTP, FTP

Data cables CAT 5E

- EMOS structured cabling components always in top quality
- guarantee maximum output, flawless running, long life
- UTP/FTP cables meet standards EN 50173, ANSI/TIA/EIA 568
- also comply with ISO/IEC 11801
- certified by accredited testing and calibration laboratory
- meet standard ČSN EN 50575 (reaction to fire)

wire insulation: HDPE = cable structure: wire = material of the inner conductor: copper clad Al (CCA) = dangerous substances: none = highest supported protocol: 100 Base-TX = cable sheath: PVC = packaging: 100 m, foil = jacket diameter: 5.0 mm = strength member: Nylon 150D = reaction to the fire: Eca = type: UTP CAT 5E CCA OEM



CCA	CAT 5E	PVC	↔ 100 m
-----	-----------	-----	------------




S9137

100/-/-/400

23 09 010 150

CAT5E PVC CCA
100M

wire insulation: HDPE = cable structure: wire = material of the inner conductor: copper (Cu) = dangerous substances: none = highest supported protocol: 100 Base-TX = cable sheath: PVC = packaging: 100 m, foil = jacket diameter: 5.0 mm = strength member: Nylon 150D = reaction to the fire: Eca = type: UTP CAT 5E BASIC



Cu	CAT 5E	PVC	↔ 100 m
----	-----------	-----	------------




S9136

100/-/-/400

23 09 010 140

CAT5E PVC BASIC
100M FOIL

wire insulation: HDPE = cable structure: wire = material of the inner conductor: copper (Cu) = dangerous substances: none = highest supported protocol: 100 Base-TX = cable sheath: PVC = packaging: 100 m, paper box = jacket diameter: 5.0 mm = strength member: Nylon 150D = reaction to the fire: Eca = type: UTP CAT 5E PVC BASIC



Cu

CAT
5E

PVC

↔
100 m



S9135 100/-/-/200
23 09 010 130 CAT5E PVC BASIC
100M

wire insulation: HDPE = cable structure: wire = material of the inner conductor: copper (Cu) = dangerous substances: none = highest supported protocol: 1000 Base-TX (Gigabit Ethernet) = cable sheath: PVC = packaging: 100 m, paper box = jacket diameter: 5 mm = reaction to the fire: Eca = type: FTP CAT 5E PVC



Cu

CAT
5E


PVC

↔
100 m



S9223 100/-/-/200
23 09 110 030 FTP CAT5E PVC
100M

wire insulation: HDPE = cable structure: wire = material of the inner conductor: copper (Cu) = dangerous substances: none = highest supported protocol: 1000 Base-TX (Gigabit Ethernet) = cable sheath: PE = packaging: 100 m, paper box = jacket diameter: 5 mm = reaction to the fire: Eca = type: FTP CAT 5E PE



Cu

CAT
5E


PE

↔
100 m



S9224 100/-/-/200
23 09 110 040 FTP CAT5E PE
100M

wire insulation: HDPE = cable structure: wire = material of the inner conductor: copper (Cu) = dangerous substances: none = highest supported protocol: 1000 Base-TX (Gigabit Ethernet) = cable sheath: PE = packaging: 305 m, paper box = jacket diameter: 5-6 mm = reaction to the fire: Eca = type: FTP CAT 5E PE



Cu

CAT
5E


PE

↔
305 m



S9225 305/-/-/305
23 09 110 050 UTP CAT5E
OUTDOOR PE

wire insulation: HDPE = cable structure: wire = material of the inner conductor: copper (Cu) = dangerous substances: none = highest supported protocol: 1000 Base-TX (Gigabit Ethernet) = cable sheath: PVC = packaging: 100 m, paper box = jacket diameter: 5 mm = reaction to the fire: Eca = type: UTP CAT 5E PVC



Cu

CAT
5E


PVC

↔
100 m



S9141 100/-/-/200
23 09 210 010 UTP CAT5E PVC
100M

wire insulation: HDPE = cable structure: wire = material of the inner conductor: copper (Cu) = dangerous substances: none = highest supported protocol: 1000 Base-TX (Gigabit Ethernet) = cable sheath: PE = packaging: 100 m, paper box = jacket diameter: 5 mm = reaction to the fire: Eca = type: UTP CAT 5E PE


**S9142**

23 09 210 020

100/-/-/200

UTP CAT5E PE
100M

wire insulation: HDPE = cable structure: wire = material of the inner conductor: copper (Cu) = dangerous substances: none = highest supported protocol: 1000 Base-TX (Gigabit Ethernet) = cable sheath: PE = packaging: 305 m, paper box = jacket diameter: 5-6 mm = reaction to the fire: Eca = type: UTP CAT 5E PE

**S9143**

23 09 210 030


305/-/-/305

UTP CAT5E
OUTDOOR PE

Data cables CAT 6

- EMOS structured cabling components always in top quality
- guarantee maximum output, flawless running, long life
- UTP/FTP cables meet standards EN 50173, ANSI/TIA/EIA 568
- also comply with ISO/IEC 11801
- certified by accredited testing and calibration laboratory
- meet standard ČSN EN 50575 (reaction to fire)

wire insulation: HDPE = cable structure: wire = material of the inner conductor: copper (Cu) = dangerous substances: none = highest supported protocol: 100 Base-TX = cable sheath: PVC = packaging: 305 m, paper box = jacket diameter: 6.0 mm = strength member: Nylon 150D = reaction to the fire: Eca = type: FTP CAT 6 PVC

**S9231**

23 09 010 160

305/-/-/305

FTP KABEL CAT6
PVC 305M

Smartphone cables

- connection, data and charging cables for phone or tablet
- phone USB cables – micro USB, USB-C & Lightning (for iPhone)
- with 2.0 and 3.0 speed, selected models with Quick Charge
- length 1–2 m, flat & round, classic/reeled , various colours
- universal extension USB cables/splitters, 3 connector types

maximum current: 5 A = maximum power: 100 W = length: 1 m = connectors: C plug – C plug = using:
charging/data = USB version: 2.0 = packaging: 1 pc, small box



USB
Data/Charge

480 Mbit/s

5 A

100 W



SM7028BL 1/-/25/100
23 35 072 210 SM7028BL

maximum current: 5 A = maximum power: 100 W = length: 2 m = connectors: C plug – C plug = using:
charging/data = USB version: 2.0 = packaging: 1 pc, small box



USB
Data/Charge

480 Mbit/s

5 A

100 W



SM7029BL 1/-/-/120
23 35 072 220 SM7029BL




Videophones, doorbells

Home videophones, sets

Home videophones

- part of modern household security
- kit consists of camera and monitor with intuitive controls
- expandable with extra inputs, screens or CCTV cameras
- gate control from inside the house, touch/mechanical keys
- higher class videophones also w/ photographic memory/Wi-Fi
- white or infrared camera illumination ensures night vision
- colour display, up to 16 ringtones, power supply included

power supply: Li-Ion battery 3.7 V/2 2200 mAh = lock and gate control: door lock control = packaging: 1 pc, small paper box = product: intercom set = dimensions of the door station: 160 × 60 × 50 mm = handset dimension: 155 × 56 × 36 mm

**H1087**

1/-/-/16

30 10 000 293

EM-518

power supply: Li-Ion battery 3.7 V/2 2200 mAh = lock and gate control: door lock control = packaging: 1 pc, small paper box = product: intercom set = dimensions of the door station: 160 × 60 × 50 mm = handset dimension: 208 × 68 × 60 mm

**H1088**

1/-/-/5

30 10 000 294

EM-519

power supply for the screen: 230 V/50 Hz = lock control = packaging: 1 pc, small paper box = dimensions of the camera unit: 150 × 60 × 40 mm = monitor size: 125 × 185 × 25 mm = camera viewing angle: 120° = screen size: 7" = product: video set = gate control = voice communication: no

**H2060**

30 10 002 060


1/-/-/6

EM-04Z

Videophones and video doorbells GoSmart



- Perfect access control for commercial and private properties
- Unusual activity alerts sent to mobile devices
- Two-way communication with the visitor without opening the door
- Automatic video and audio recording when motion is detected
- Night vision for perfect images in all lighting conditions
- Compatibility with EMOS GoSmart products and TUYA devices
- Voice control with Google Assistant and Amazon Alexa



- product: IP door panel
- number of buttons on the camera unit: 1
- power supply: 12 V DC (part of the package)
- number of wireless (monitor/lock/power supply): UT
- dimensions of the camera unit: 50 × 139 × 38 mm
- IP rating: IP44
- camera viewing angle: 160°
- door lock control
- installation: surface

= packaging: 1 pc, small paper box

**H4033**

30 10 040 330

1/-/-/8

IP-20POE

- product: IP door panel
- number of buttons on the camera unit: 1
- power supply: 12 V DC (part of the package)
- number of wireless (monitor/lock/power supply): UT
- dimensions of the camera unit: 69 × 38 × 140 mm
- IP rating: IP44
- camera viewing angle: 160°
- door lock control
- installation: surface

= packaging: 1 pc, small paper box

**H4034**

30 10 040 340

1/-/-/8

IP-21POE

- installation: surface
- IP rating: IP44
- power supply: AC 16-24V, USB: DC 5V
- number of buttons on the camera unit: 1
- number of wireless (monitor/lock/power supply): 2
- packaging: 1 pc, small plastic box
- product: IP door panel
- dimensions of the camera unit: 115 × 45 × 21 mm
- camera viewing angle: 100°

**H4035**

30 10 040 350

1/-/-/30

IP-10W

- intercom
- possibility to record
- power supply for the screen: #
- lock control
- packaging: 1 pc, box
- dimensions of the camera unit: 83 × 183 × 40 mm
- monitor size: 175 × 120 × 21 mm
- camera viewing angle: 110°
- screen size: 7"

- product: doorphone set with WiFi
- supported OS: Android, iOS
- compatibility: EMOS GoSmart, TUYA, LIDL, Smartlife,
- protocol: Wi-fi
- connectivity: 2.4 GHz WIFI
- gate control
- voice communication: two-way

**H4040**

1/-/-/4

30 10 040 400

2 WIRE IP VIDEO
DOOR PHONE

- intercom
- possibility to record
- power supply for the screen: #
- lock control
- packaging: 1 pc, box
- dimensions of the camera unit: 83 × 183 × 40 mm
- monitor size: 174 × 128 × 21 mm
- camera viewing angle: 110°
- screen size: 7"

- product: doorphone set with WiFi
- supported OS: Android, iOS
- compatibility: EMOS GoSmart, TUYA, LIDL, Smartlife,
- protocol: Wi-fi
- connectivity: 2.4 GHz WIFI
- gate control
- voice communication: two-way

**H4041**

1/-/-/7

30 10 040 410

2 WIRE IP VIDEO
DOOR PHONE

- intercom
- possibility to record
- power supply for the screen: #
- lock control
- packaging: 1 pc, box
- dimensions of the camera unit: 83 × 183 × 40 mm
- monitor size: 174 × 128 × 21 mm
- camera viewing angle: 110°
- screen size: 7"

- product: doorphone set with WiFi
- supported OS: Android, iOS
- compatibility: EMOS GoSmart, TUYA, LIDL, Smartlife,
- protocol: Wi-fi
- connectivity: 2.4 GHz WIFI
- gate control
- voice communication: two-way

**H4042**

1/-/-/21

30 10 040 420

2 WIRE IP VDP
SYSTEM

- intercom
- possibility to record
- power supply for the screen: #
- lock control
- packaging: 1 pc, box
- dimensions of the camera unit: 83 × 183 × 40 mm
- monitor size: 174 × 128 × 21 mm
- camera viewing angle: 110°
- screen size: 7"

- product: doorphone set with WiFi
- supported OS: Android, iOS
- compatibility: EMOS GoSmart, TUYA, LIDL, Smartlife,
- protocol: Wi-fi
- connectivity: 2.4 GHz WIFI
- gate control
- voice communication: two-way

**H4044**

1/-/-/21

30 10 040 440

2 WIRE IP VDP
OUTDOOT UNIT 4

- possibility to record
- optional connection of CCTV camera
- power supply for the screen: 12 V DC (included)
- lock control
- packaging: 1 pc, box
- dimensions of the camera unit: 46 × 180 × 70 mm
- monitor size: 130 × 180 × 23 mm
- camera viewing angle: 120°
- screen size: 7"

- product: doorphone set with WiFi
- supported OS: Android, iOS
- compatibility: EMOS GoSmart, TUYA, LIDL, Smartlife,
- protocol: Wi-Fi, RF
- connectivity: 2.4 GHz WIFI
- gate control
- voice communication: two-way

**H4101**

1/-/-/4

30 10 041 010


IP-410W

Cameras, Surveillance

GoSmart Cameras



- For keeping people safe and protecting the interiors of homes
- Surveillance of exteriors of commercial and private buildings
- Alerts of unusual activity sent to mobile devices
- Two-way voice communication
- Automatic video and audio recording when motion is detected
- Connection to home network via WIFI protocol
- Compatibility with EMOS GoSmart products and TUYA devices
- Voice control with Google Assistant and Amazon Alexa



- automatic image saving
- setting the detection area
- night vision
- camera viewing angle: 100°
- IP rating: IP20
- camera resolution: 2 560 × 1 440
- motion detection
- sound detection
- compatibility: EMOS GoSmart, TUYA, LIDL, Smartlife
- protocol: Wi-Fi
- transmission frequency: 2.4 GHz/5 GHz Dual Band
- voice communication: two-way
- motion tracking
- motorised rotation
- motion detection angle: 100°
- motion detection range: 10 meters
- human body recognition



DUAL 2.4/5 GHz



4MPx resolution



Night vision



Pan and tilt



100°



Motion detection



Motion tracking



Sound detection



2 way audio



Micro SD max. 256 GB



8 592920 135594

H4060

30 24 040 600

1/-/-12

IP-220W

- automatic image saving
- setting the detection area
- night vision
- camera viewing angle: 180°
- IP rating: IP21
- camera resolution: 2 560 × 1 440
- motion detection
- sound detection
- compatibility: EMOS GoSmart, TUYA, LIDL, Smartlife
- protocol: Wi-Fi
- transmission frequency: 2.4 GHz/5 GHz Dual Band
- voice communication: two-way
- motion tracking
- motorised rotation
- motion detection angle: 120°
- motion detection range: 10 meters
- human body recognition



DUAL 2.4/5 GHz



4MPx resolution



Night vision



Pan and tilt



Motion detection



Motion tracking



Sound detection



2 way audio



Micro SD max. 256 GB



8 592920 147061

H4062

30 24 040 620

1/-/-16

IP-222W

Doorbells

Wireless doorbells

- EMOS doorbells have a battery – or mains – powered receiver
- paired from production/paired by user with ease in seconds
- new models with signal repeater – unlimited range
- with 1 or 2 waterproof buttons, more buttons can be added
- volume control, optical signalling and choice of many melodies

reach of the button: 180 m = maximum ringing volume: 85 dB = option to add another button: yes, max. 8 = power supply of the main unit: 230 V AC = power button: 1× 3 V CR2032 (included) = optical signaling on the button = optical signaling on the doorbell = number of melodies: 16 = number of receivers in a package: 1 pc = number of buttons in a package: 1 pc = extra (spare) button: P5760T = volume control: yes, 5 levels = waterproof button: IP44 = pairing method: automatic pairing-self-learning

**P5760N**

1/-/-18

34 02 060 011

P5760N



reach of the button: 180 m = maximum ringing volume: 85 dB = option to add another button: yes, max. 8 = power supply of the main unit: 3× 1.5 V AA (not included) = power button: 1× 3 V CR2032 (included) = optical signaling on the button = optical signaling on the doorbell = number of melodies: 16 = number of receivers in a package: 1 pc = number of buttons in a package: 1 pc = extra (spare) button: P5760T = volume control: yes, 5 levels = waterproof button: IP44 = pairing method: automatic pairing-self-learning

**P5763N**

1/-/-24

34 02 060 012

P5763N



reach of the button: 180 m = maximum ringing volume: 85 dB = option to add another button: yes, max. 8 = power supply of the main unit: 3× 1.5 V AA (not included) = power button: 1× 3 V CR2032 (included) = optical signaling on the button = optical signaling on the doorbell = number of melodies: 16 = number of receivers in a package: 1 pc = extra (spare) button: P5760T = volume control: yes, 5 levels = pairing method: automatic pairing-self-learning

**P5763RN**

1/-/-36

34 02 063 002

P5763RN




reach of the button: 180 m or wiring connection = maximum ringing volume: 90 dB = option to add another button: yes, max. 8 = power supply of the main unit: 230 V AC = power button: 1× 3 V CR2032 (included) = optical signaling on the button = number of melodies: 10 = number of receivers in a package: 1 pc = number of buttons in a package: 1 pc = extra (spare) button: P5734T; P57000T = volume control: yes, 4 levels = waterproof button: IP54 = pairing method: automatic pairing-self-learning



P57103
34 02 129 000

1/-/-/18
P57103




Spare push buttons

- spare or additional buttons for EMOS doorbells
- specific models are compatible with specific doorbell types
- most commonly require 1 battery, water resistant (IP44)



P57000T
34 01 570 001

1/-/-/112
P57000T



Wired doorbells

- classic mechanical bells with one melody
- distance between bell and button exactly according to the user's needs
- constantly functional thanks to 230 V power supply, via transform




P57000TR
34 01 570 000

1/-/-/20
P57000TR



- max. output 1× USB: –
- max. output total: –
- packaging: 1 pc, small box
- dimensions: 85 × 64 × 35 mm
- size of the connector: –
- designed for: wire bells
- input voltage: 230 V~, 50/60 Hz
- output voltage: 8 V, 12 V, 24 V
- output current: 0.3 A (8 W)

- reach of the button: wiring connection
- maximum ringing volume: 85 dB
- power supply of the main unit: 4×1.5V AA/transform
- power button: wiring connection
- number of melodies: 1
- number of receivers in a package: 1 pc
- extra (spare) button: P57000T


**P57101**

34 01 571 010

1/-/-/15

P57101

- reach of the button: wiring connection
- maximum ringing volume: 85 dB
- power supply of the main unit: 4×1.5V AA/transform
- power button: wiring connection
- number of melodies: 1
- number of receivers in a package: 1 pc
- extra (spare) button: P57000T

**P57102**

34 01 571 020


1/-/-/15

P57102

Wireless doorbells GoSmart



- EMOS doorbells have a receiver for socket or batteries
- Doorbells pair themselves in a few seconds
- With 1 or 2 waterproof buttons, option to add more buttons
- Volume control, optical signal and up to 52 melodies
- Option to connect to home automation
- Connection to home network via WiFi
- Compatibility with EMOS GoSmart products and TUYA devices
- Voice control with Google Assistant and Amazon Alexa



- reach of the button: 150 m
- number of melodies: 52
- pairing method: automatic pairing-self-learning
- optical signaling on the doorbell
- optical signaling on the button
- maximum ringing volume: 110 dB
- option to add another button: yes, max. 8 + 2 v APP
- number of buttons in a package: 1 pc
- extra (spare) button: P5734T
- waterproof button: IP44
- power button: 1× 3 V CR2032 (included)
- number of receivers in a package: 1 pc
- volume control: yes, 4 levels
- power supply of the main unit: 230 V AC

**P5735WS**

34 02 127 000

1/-/-/32

P5735WS

- reach of the button: 150 m
- number of melodies: 52
- pairing method: automatic pairing-self-learning
- optical signaling on the doorbell
- optical signaling on the button
- maximum ringing volume: 110 dB
- option to add another button: yes, max. 8 + 2 v APP
- number of buttons in a package: 1 pc
- extra (spare) button: P5734T
- waterproof button: IP44
- power button: 1× 3 V CR2032 (included)
- number of receivers in a package: 1 pc
- volume control: yes, 4 levels
- power supply of the main unit: 230 V AC


**P5735SS**

34 02 128 000

1/-/-/32

P5735SS


Multimeters, testers

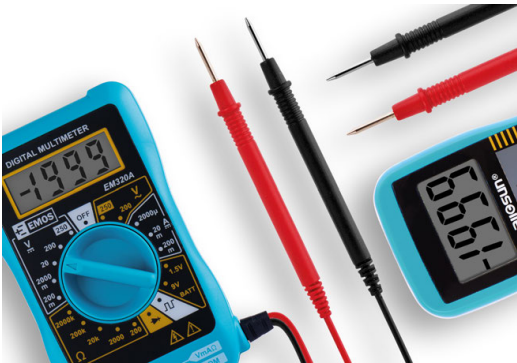

Testers

- voltage tester for measuring voltage value
- also identifies phases, sequence and polarity
- detects DC and AC voltage, contact or non-contact
- results indicated optically and acoustically

DC voltage: 0-250 V = AC voltage: 200-250 V = AC/DC voltage: 0-250 V = polarity indication: no = signalization: optical = power source: from power source = frequency range: 0-60 Hz = packaging: 1 pc, header card



M0016	1/-/12/96
22 01 017 000	VT-101

DC voltage: 0-250 V = AC voltage: 200-250 V = AC/DC voltage: 0-250 V = polarity indication: no = signalization: optical = power source: from power source = frequency range: 0-60 Hz = packaging: 1 pc, header card



M0017	1/-/12/108
22 01 018 000	VT-102

DC voltage: 12-250 V = AC voltage: 12-230 V = AC/DC voltage: 12-250 V = polarity indication: no = non-contact measuring: yes = signalization: optical = power source: from power source = frequency range: 50-500 Hz = packaging: 1 pc, header card



M0049	1/-/12/120
22 01 019 000	VT-121


Thermostats, CO and smoke alarms



Thermostats

Thermostats GoSmart

- Reduce heating/cooling costs for buildings
- Individual temperature settings for different rooms
- Set temperature scenarios for specific day and time
- Control all settings from anywhere using the app
- Heating or air conditioning control based on GPS location
- Connection via WIFI or Zigbee protocols
- Compatibility with EMOS GoSmart products and TUYA devices
- Voice control with Google Assistant and Amazon Alexa



control mode: heating system = ON/OFF function = holiday mode = temperature measurement: 0 °C to 95 °C, resolution 0.5 °C = power source: 230 V AC = temperature adjustment: from 1 °C up to 70 °C, after 0.5 °C = anti-frost protection = number of programs: customisable temperature (6× per day) = backlight display = dimensions: 86 × 86 × 43 mm = part of the package: thermostat, floor sensor 3 m, Ø 8 mm = switching load: 16 A resistive = switching: voltage 230 V AC, 50 Hz = temperature adjustment type: 6 temperature changes per day = type of control: programmable electronic room thermostat, option to control via mobile phone (iOS, Android) = thermostat type: wired for underfloor heating, concealed

**P56201BUF**

1/-/-/36

21 01 900 012

P56201BUF



thermostat type: socket = type of control: programmable electronic room thermostat, option to control via mobile phone (iOS, Android) = backlight display = control mode: heating and cooling system = number of programs for thermostat: customisable temperature (6× per day) = temperature adjustment type: 6 temperature changes per day = temperature measurement: 0 °C to 45 °C, resolution 0.1 °C = temperature adjustment: 5 °C to 40 °C, resolution 0.5 °C = adjustable variance of temperature: from 0.2 °C up to 2 °C, after 0.1 °C = number of switching per day for timer: 24 = function to change summer/winter time = countdown function: no = dimensions: 82 × 62 × 146 mm = number of programs for timer: 24

**P56601SH**

1/-/-/18

21 06 000 400

P56601SH

CO and smoke alarms

- life investment for families w/ gas boiler/cooker/fireplace
- CO detector identifies carbon monoxide (invisible, odorless)
- smoke detector alerts to potential fires in the household
- EMOS detector with 10 year service life

detection type: smoke detector = type of installation: possible to mount on the wall or freestanding = type of signaling: optical and audible = operating temperature: 0 °C to 40 °C = operating humidity: 5-95 % = lifetime: 10 years = power source: 1× 9 V, included = packaging: 1 pc, small box = notifications to the mobile app: no

**10**
YEARS

8 592920 137673

P56503

21 04 106 000

1/-/-/12

TSS910A

Radiator fan

- saving heating costs
- very low electricity consumption
- more comfortable and faster heating of the home
- easy installation on most hot water radiators and convectors
- quiet operation with a volume below 20 dB
- safe operation, TÜV certified

fans per unit: 1 fan = airflow: 36 m³/h for each fan = noise level: <20 dB = fan speed: 1,800 RPM (default setting) = on/off: ON 28°C – 40°C / OFF 25°C = temperature measurement: 25 °C to 70 °C, resolution 0.1 °C = temperature adjustment: from 28 °C up to 70 °C, after 1 °C = power consumption: 0.8 W (1 800 RPM); 1.4 W (2 400 RPM) = standby power consumption: 0.03 W = material: heat-resistant PC with ABS = colour: white = power source: 5 V DC/2 000 mA (included) = dimensions: 25 × 70 × 345 mm = warranty period: 2 years = packaging: 1 pc, small paper box



8 592920 138021

P56PR1

21 07 561 000

1/-/-/6

P56PR1

fans per unit: 2 fans = airflow: 36 m³/h for each fan = noise level: <20 dB = fan speed: 1,800 RPM (default setting) = on/off: ON 28°C – 40°C / OFF 25°C = temperature measurement: 25 °C to 70 °C, resolution 0.1 °C = temperature adjustment: from 28 °C up to 70 °C, after 1 °C = power consumption: 0.8 W (1 800 RPM); 1.4 W (2 400 RPM) = standby power consumption: 0.03 W = material: heat-resistant PC with ABS = colour: white = power source: 5 V DC/2 000 mA (included) = dimensions: 25 × 70 × 345 mm = warranty period: 2 years = packaging: 1 pc, small paper box



8 592920 138038

P56PR2

21 07 562 000

1/-/-/4

P56PR2

fans per unit: 3 fans = airflow: 36 m³/h for each fan = noise level: <20 dB = fan speed: 1,800 RPM (default setting) = on/off: ON 28°C – 40°C / OFF 25°C = temperature measurement: 25 °C to 70 °C, resolution 0.1 °C = temperature adjustment: from 28 °C up to 70 °C, after 1 °C = power consumption: 0.8 W (1 800 RPM); 1.4 W (2 400 RPM) = standby power consumption: 0.03 W = material: heat-resistant PC with ABS = colour: white = power source: 5 V DC/2 000 mA (included) = dimensions: 25 × 70 × 345 mm = warranty period: 2 years = packaging: 1 pc, small paper box

**P56PR3**

21 07 563 000

1/-/-/4

P56PR3

fans per unit: 1 fan = airflow: 36 m³/h for each fan = noise level: <20 dB = fan speed: 1,800 RPM (default setting) = on/off: ON 28°C – 40°C / OFF 25°C = temperature measurement: 25 °C to 70 °C, resolution 0.1 °C = temperature adjustment: from 28 °C up to 70 °C, after 1 °C = power consumption: 0.8 W (1 800 RPM); 1.4 W (2 400 RPM) = standby power consumption: 0.03 W = material: heat-resistant PC with ABS = colour: white = power source: 5 V DC/2 000 mA (not included) = dimensions: 25 × 70 × 345 mm = warranty period: 2 years = packaging: 1 pc, small paper box

**P56EXT1**

21 07 956 100


1/-/-/6

P56EXT1

Watering timer GoSmart



- Manual and automatic control
- Adjustable timing and volume of water used
- Variants with one outlet or two for 2-zone irrigation
- Rain delay function
- Connection to home network via Bluetooth protocol
- Compatibility with EMOS GoSmart products and TUYA devices
- Voice control with Google Assistant and Amazon Alexa



- operating water pressure : 0,5–8 bar
- maximum flow rate : 35 l/min
- Irrigation frequency : unlimited
- irrigation duration : 1 minute - 24 hours
- irrigation cycles per day : unlimited
- thread : 3/4", 1"
- manual irrigation
- IP rating: IP54
- power source: 4× 1.5 V AA (not included)
- dimensions: 120 × 160 × 55 mm
- packaging: 1 pc, small box
- series: GoSmart
- supported OS: Android, iOS
- compatibility: EMOS GoSmart, TUYA, LIDL, Smartlife,
- protocol: Bluetooth 5.0
- control by voice assistants
- notifications to the mobile app
- application languages: EN, CZ, SK, PL, DE, HU, SI, FR,

**PW56201**

21 05 562 010

1/-/-/12

PW56201

- operating water pressure : 0,5–8 bar
- maximum flow rate : 35 l/min
- Irrigation frequency : unlimited
- irrigation duration : 1 minute - 24 hours
- irrigation cycles per day : unlimited
- thread : 3/4", 1"
- manual irrigation
- IP rating: IP54
- power source: 4× 1.5 V AA (not included)
- dimensions: 135 × 160 × 70 mm
- packaging: 1 pc, small box
- series: GoSmart
- supported OS: Android, iOS
- compatibility: EMOS GoSmart, TUYA, LIDL, Smartlife,
- protocol: Bluetooth 5.0
- control by voice assistants
- notifications to the mobile app
- application languages: EN, CZ, SK, PL, DE, HU, SI, FR,

**PW56202**

21 05 562 020

1/-/-/8

PW56202

Watering timer

- manual and automatic control
- adjustable timing and volume of water used
- easy installation

operating water pressure : 0,5-8 bar = maximum flow rate : 35 l/min = Irrigation frequency : 1 - 2 - 3 - 4 - 5 - 6 - 8 - 12 - 24 - 48 - 72 hours - 1 week = irrigation duration : 3 - 5 - 10 - 15 - 20 - 30 - 45 - 60 - 90 - 120 min = irrigation cycles per day : max 24 = thread : 3/4", 1" = manual irrigation = IP rating: IP54 = power source: 2× 1.5 V AA (not included) = dimensions: 140 × 155 × 75 mm = packaging: 1 pc, small box = warranty period: 2 years



PW56001

1/-/-/8

21 05 560 010

PW56001

Installation material, tapes



Installation material

Sockets, switches

EMOS

IP20

- installation: into a junction box
- in anthracite colour
- with USB output


A6000.7

1/-/10/40

19 06 010 513

W13-
C311FUSBAC

8 592920 141540

1x USB-A
output1x USB-C
output

colour: anthracite = design: SCHUKO = IP rating: IP20 = packaging: 1 pc, PE packet =
product: single socket with protective contacts and USB output 3 A max. = version:
single = voltage: 250 V~ = type of mounting: into a box (recommended depth min. 60
mm)

IP54/IP44

- installation: onto a wall
- enclosure: IP44
- double socket is internally interconnected

A1396.3

1/5/-/25

19 50 010 207

EF602GV



8 592920 148884



colour: grey-black = design: SCHUKO = IP rating: IP44 = packaging: 1 pc, PE packet = product: double socket with earthing pins and lids with interconnection = version: double water-resistant – vertical mounting = voltage: 250 V~ = type of mounting: on the wall

A1396.4

1/5/-/25

19 50 010 208

EF600SAGV



8 592920 148914



colour: grey-black = design: SCHUKO = IP rating: IP44 = packaging: 1 pc, PE packet = product: combination of alternating switch nr.6 and socket with earthing pin and lid = version: double water-resistant – vertical mounting = voltage: 250 V~ = type of mounting: on the wall

Installation material

Sockets, switches

ABB

Others

- through single-pole cord switches (white or black)
- separate fork

A1208

1/-/50/200

31 07 120 800

KF-DS-5



8 592920 140475



colour: white = IP rating: IP20 = packaging: 1 pc, hanging = product: one pole through switch = version: 1 button cord, through = voltage: 250 V~ = type of mounting: on a cable H03VVH2-F, H05VVH2-F: 2 x 0,5 - 0,75 mm²

A1209

1/-/50/200

31 07 120 900

A1209



8 592920 140505



colour: black = IP rating: IP20 = packaging: 1 pc, hanging = product: one pole through switch = version: 1 button cord, through = voltage: 250 V~ = type of mounting: on a cable H03VVH2-F, H05VVH2-F: 2 x 0,5 - 0,75 mm²

Installation material

Sockets, switches

EMOS

CYKLONE

- option for horizontal and vertical mounting
- flexible seal ensuring tightness
- cable passage for easy connection of cable or socket
- side hole for condensate drainage
- flexible edge around the perimeter to adapt to wall irregularities
- reinforcing edge around the mounting area to improve tightness

D730422	1/5/-/80		D730427	1/5/-/80	
19 50 730 422	730479		19 50 730 427	730480	
 8 592920 136454			 8 592920 136485		
▪ product: alternating switch – no. 6 ▪ design: Cyklone ▪ voltage: 250 V~/10 AX ▪ type of mounting: on the wall ▪ version: 1 button stairway, waterproof ▪ IP rating: IP55	▪ colour: grey ▪ packaging: 1 pc		▪ product: switch controller (1/0) ▪ design: Cyklone ▪ voltage: 250 V~ ▪ type of mounting: on the wall ▪ version: 1 button water-resistant ▪ IP rating: IP55	▪ colour: grey ▪ packaging: 1 pc	

Tapes

Electroinsulating PVC tapes

- width: 15–25 mm, length: 8–20 m, thickness: 0.13 mm
- white, red, black, brown, blue, green, yellow or mix
- meets ROHS
- adhesion 1.5 N/10 mm, dielectric strength 2.5 kV/mm

- length: 8 m
- recommended storage temperature: 10–25 °C
- electric strength - minimum: 2,5 kV/mm
- adhesive material: rubber
- packaging: 6 pcs, foil
- intended use: hobby, workshop, garden
- installation temperature range: 0–80 °C
- ROHS compliant
- width: 15 mm

- thickness: 0.13 mm
- tape type: PVC

**F61590**

1/-/18/36

20 01 151 100

PVC TAPE 15/8
6PCS COLORMIX

Other tapes

- repair tapes: durability and utility
- self-amalgamating tapes: material rubber or silicone
- universal DUCT TAPE: strong, high adhesion, water-tightness
- reflective tapes: increase biker, pedestrian and pram safety
- double-sided acrylic tapes: high adhesion and flexibility

length: 1 m ▪ recommended storage temperature: 10–45 °C ▪ adhesive material: synthetic adhesive ▪ UV resistant ▪ packaging: 1 pc, paper box ▪ intended use: pools, hobby, workshop, garden ▪ installation temperature range: -25–90 °C ▪ ROHS compliant ▪ width: 100 mm ▪ thickness: 0.7 mm ▪ tape type: PVC base


**F6100**

1/-/-/32

20 05 061 000

POOLREPAIR
TRANSPARENT

length: 1 m = recommended storage temperature: 10–45 °C = adhesive material: synthetic adhesive = UV resistant = packaging: 1 pc, paper box = intended use: pools, hobby, workshop, garden = installation temperature range: -25–90 °C = ROHS compliant = width: 100 mm = thickness: 0.7 mm = tape type: PVC base


F6110

1/-/-/32

20 05 061 100

**POOLREPAIR
BLACK**

length: 25 m = recommended storage temperature: 10–45 °C = adhesive material: acrylic = UV resistant = packaging: 1 pc, paper box = intended use: repairs of all types of polycarbonates, repairs of glass panes = installation temperature range: -25–90 °C = ROHS compliant = width: 50 mm = thickness: 0.15 mm = tape type: PE base


F6200

1/-/-/30

20 05 062 000

**GREENHOUSE
TAPE**

length: 3 m = recommended storage temperature: 10–45 °C = adhesive material: acrylic = packaging: 1 pc, paper box = intended use: hobby, home interior = installation temperature range: 5–80 °C = ROHS compliant = width: 20 mm = thickness: 1.00 mm = tape type: PE foam


F6090

1/-/-/80

20 05 060 900

IZOTAPE FOAM

length: 3 m = recommended storage temperature: 10–45 °C = adhesive material: acrylic = packaging: 1 pc, paper box = intended use: hobby, home interior = installation temperature range: 5–80 °C = ROHS compliant = width: 30 mm = thickness: 2 mm = tape type: acrylic double-sided tape


F6300

1/-/-/30

20 05 063 000

EM-2303N

Order Code	Item Number	page	Order Code	Item Number	page	Order Code	Item Number	page	Order Code	Item Number	page	Order Code	Item Number	page	Order Code	Item Number	page
A1208	31 07 120 800	135	DCAW22	15 50 000 176	93	P1322CU	19 22 130 203	109	Z57311	15 25 813 207	44	ZGJ044S	15 54 202 000	74	ZS2913	15 31 291 300	53
A1209	31 07 120 900	135	DCAW23	15 50 000 178	94	P1412SM	19 22 940 203	108	Z58311	15 25 813 209	44	ZGJ084S	15 54 202 200	74	ZS2922	15 31 292 200	51
A1396.3	19 50 010 207	135	DCAW24	15 50 000 170	93	P1422SM	19 22 940 201	110	Z59901	15 25 813 200	42	ZGJ0F4S	15 54 202 201	74	ZS2923	15 31 292 300	53
A1396.4	19 50 010 208	135	DCCW05	15 50 000 181	95	P1513FC	19 02 150 309	107	Z59601	15 25 813 205	43	ZGK044S	15 54 204 000	75	ZS2932	15 31 293 200	51
A6000.7	19 06 010 513	134	DCGW15	15 50 000 171	92	P19410N	19 08 141 001	114	Z5A01	15 25 813 202	43	ZGK084S	15 54 204 200	75	ZS2933	15 31 293 300	53
B04106	10 24 130 100	13	DCGW16	15 50 000 188	92	P2514	14 50 000 460	29	Z5B011	15 25 813 203	43	ZGL010P	15 54 000 013	75	ZS2942	15 31 294 200	51
B04114	10 24 114 000	12	DCLW35	15 50 000 177	96	P2315	14 50 000 480	29	Z5CS11	15 25 813 204	43	ZGL020P	15 54 000 014	76	ZS2943	15 31 294 300	53
B0412L	10 24 110 200	12	DCLW36	15 50 000 182	96	P2316	14 50 000 510	30	Z73115	15 35 247 000	45	ZGL0A0P	15 54 002 003	76	ZT3021	15 46 139 900	49
B04138	10 24 118 000	13	DCLW37	15 50 000 183	96	P2317	14 50 000 490	29	Z73116	15 35 248 000	45	ZGL0C0P	15 54 002 004	76	ZT3121	15 46 140 000	49
B04206	10 24 230 100	14	DCTW26	15 50 000 180	94	P3118	14 50 000 450	26	Z73125	15 35 249 000	45	ZIW154R	15 55 154 000	84	ZT3221	15 46 140 100	49
B04214	10 24 214 000	13	DCTW27	15 50 000 184	92	P3120	14 50 000 520	26	Z73126	15 35 250 000	46	ZIW15CR	15 55 015 000	83	ZTV55	15 51 550 000	82
B0421L	10 24 210 200	13	DCTW28	15 50 000 185	97	P3121	14 50 000 530	26	Z73135	15 35 251 000	46	ZIW17FR	15 55 017 000	83	ZTV65	15 51 650 000	82
B04238	10 24 218 000	13	DCTW29	15 50 000 186	97	P3122	14 50 000 540	27	Z73136	15 35 252 000	46	ZIW181R	15 54 181 000	63	ZTV75	15 51 750 000	83
B0551BL	16 13 055 100	20	DCTW30	15 50 000 187	94	P3214	14 40 004 908	27	Z7631	15 38 198 000	78	ZIW184R	15 54 184 000	63	ZV1163	15 40 116 900	60
B0551GY	16 13 055 101	20	DCTW31	15 50 000 191	95	P3215	14 50 000 500	27	Z7633	15 38 199 000	78	ZIW191R	15 54 191 000	64	ZV1164	15 40 117 000	61
B0551S	16 13 055 102	20	DCTW32	15 50 000 189	94	P3322	14 56 000 190	31	Z7634	15 38 200 000	78	ZIW194R	15 54 194 000	63			
B0552AG	16 13 055 201	21	DCTW33	15 50 000 190	97	P3323	14 56 000 200	31	Z7635B	15 38 200 100	79	ZIW223R	15 55 223 000	84			
B0552RG	16 13 055 200	21	DCWW41	15 50 000 169	95	P3324	14 40 013 130	30	Z7635W	15 38 200 200	79	ZIW22AR	15 55 022 000	83			
B0555BL	16 13 055 502	21	DCWW42	15 50 000 173	96	P4544	14 50 000 440	28	Z7636B	15 38 200 400	79	ZIW249R	15 55 249 000	84			
B0555GY	16 13 055 501	21	DCWW43	15 50 000 174	96	P4545	14 50 000 550	28	Z7636W	15 38 200 300	79	ZIW269R	15 55 269 000	85			
B0555S	16 13 055 500	21	E0090	26 18 002 700	104	P4716	14 40 013 129	32	Z7637B	15 38 200 500	79	ZIW269R	15 55 269 000	85			
B0560B	16 13 056 000	22	E0091	26 18 002 800	104	P4717	14 40 833 300	32	Z7637W	15 38 200 600	80	ZL1F23	15 25 741 451	40			
B0561B	16 13 056 100	22	E0522	26 03 204 000	100	P4718	14 40 813 102	32	Z7638B	15 38 200 700	80	ZL1F47	15 25 731 262	39			
B25186	10 32 126 082	16	E0531	26 06 180 000	98	P4719	14 50 000 470	33	Z7638W	15 38 200 800	80	ZL1F48	15 25 731 458	40			
B25216	10 32 226 214	17	E6210	26 03 205 000	100	P4720	14 50 000 413	33	Z7639	15 38 200 900	80	ZL3F37	15 25 731 452	39			
B27186	10 32 126 081	17	E8610	26 06 183 000	99	P4721	14 39 013 902	33	ZAB101	15 46 101 000	85	ZL3F47	15 25 731 261	39			
B27216	10 32 226 213	17	E8614	26 06 182 000	99	P54013	19 09 030 150	110	ZAB102	15 46 102 001	86	ZL3F48	15 25 731 457	40			
B30234	10 21 230 003	15	E8620	26 06 181 000	98	P54014	19 09 030 151	111	ZAB103	15 46 103 000	86	ZL5F47	15 25 743 241	40			
B30764	10 41 760 014	16	F6090	20 05 060 900	138	P54015	19 09 060 151	111	ZAB901	15 46 901 000	86	ZL5F47.3	15 25 743 244	41			
B32254	10 42 202 524	14	F6100	20 05 061 000	137	P54016	19 09 060 301	111	ZAB902	15 46 902 000	87	ZL5F47.6	15 25 743 245	41			
B32304	10 42 243 014	15	F6110	20 05 061 100	138	P54017	19 09 060 500	112	ZAB903	15 46 903 000	87	ZL5F48	15 25 743 419	41			
B32324	10 42 203 224	14	F61590	20 01 151 100	137	P54018	19 09 060 152	111	ZB1614	15 44 103 643	58	ZL5F48.3	15 25 743 422	42			
B32854	10 42 245 014	15	F6200	20 05 062 000	138	P54019	19 09 060 302	111	ZB1624	15 44 103 644	58	ZL5F48.6	15 25 743 423	42			
B50444D	16 04 844 112	18	F6300	20 05 063 000	138	P54213	19 09 030 152	112	ZB3614	15 44 203 620	58	ZL5F57	15 25 743 242	40			
B53457P	16 04 845 114	18	H1087	30 10 000 293	122	P54214	19 09 030 153	112	ZB3624	15 44 203 621	59	ZL5F58	15 25 743 420	41			
B6405GY	16 11 640 500	19	H1088	30 10 000 294	122	P54215	19 09 060 153	112	ZCW11BR	15 55 110 000	84	ZL5F67	15 25 743 243	41			
B6410BE	16 11 641 000	19	H2060	30 10 002 060	123	P54216	19 09 060 303	113	ZCW11WR	15 55 111 000	84	ZL5F68	15 25 743 421	42			
B6410BL	16 11 641 001	19	H4033	30 10 040 330	123	P54217	19 09 060 501	113	ZCW34BR	15 55 034 000	83	ZL6F23	15 25 731 451	39			
B6420B	16 11 642 000	20	H4034	30 10 040 340	123	P54218	19 09 060 154	113	ZF1A42	15 25 741 259	36	ZM3415	15 39 084 050	59			
C2454.3	31 32 245 430	47	H4035	30 10 040 350	123	P54219	19 09 060 304	113	ZF1A43	15 25 731 454	35	ZM3416	15 39 084 080	59			
C2608.1	31 32 260 813	47	H4040	30 10 040 400	124	P5507N	19 07 110 040	117	ZF1D52	15 25 731 259	34	ZM3417	15 39 084 110	60			
C2611.4	31 32 260 802	47	H4041	30 10 040 410	124	P5525N	19 27 110 034	117	ZF1D53	15 25 731 456	35	ZM3418	15 39 084 120	60			
C2611.5	31 32 260 812	47	H4042	30 10 040 420	124	P56201BUF	21 01 900 012	130	ZF3A42	15 25 741 258	35	ZN1120	15 48 112 000	61			
C3454.1	31 32 345 410	47	H4044	30 10 040 440	124	P56503	21 04 106 000	131	ZF3A43	15 25 731 453	35	ZN1320	15 48 132 000	62			
C3605.4	31 32 360 540	47	H4060	30 24 040 600	125	P56601SH	21 06 000 400	130	ZF3D52	15 25 731 258	34	ZN1330	15 48 133 000	62			
C3606.3	31 32 360 630	48	H4062	30 24 040 620	125	P56EXT1	21 07 956 100	132	ZF3D53	15 25 731 455	35	ZN1340	15 48 134 000	62			
C3607.7	31 32 360 770	48	H4101	30 10 041 010	124	P56PR1	21 07 561 000	131	ZF5D42.3	15 25 743 237	36	ZN2120	15 48 212 000	61			
C3607.8	31 32 360 780	48	H6001	26 31 600 100	102	P56PR2	21 07 562 000	131	ZF5D43.3	15 25 743 416	36	ZN2130	15 48 213 000	62			
C3608.4	31 32 360 840	48	H6002	26 31 600 200	101	P56PR3	21 07 563 000	132	ZF5D502	15 25 743 238	36	ZPW218R	15 51 021 800	81			
C3608.5	31 32 360 850	48	H6004	26 31 600 400	101	P5700T	34 01 570 001	127	ZF5D540	15 25 743 417	37	ZPW313I	15 51 021 800	81			
C3613.1	31 32 361 310	48	H6006	26 31 600 600	101	P5700TR	34 01 570 000	127	ZF5D62D	15 25 743 239	36	ZPW513I	15 55 513 000	82			
C3613.2	31 32 361 320	48	H6101	26 31 610 100	102	P57101	34 01 571 010	128	ZF5D640	15 25 743 418	37	ZPW518R	15 51 051 800	81			
C3613.3	31 32 361 330	48	H6102	26 31 610 200	101	P57102	34 01 571 020	128	ZG112S	15 52 112 000	66	ZQ5F52S	15 25 743 240	38			
D4AC21	15 50 042 024	88	H6901	26 31 690 100	102	P57103	34 02 129 000	127	ZG122S	15 52 122 000	65	ZQ8E42D	15 25 740 236	38			
D4AC22	15 50 042 025	88	H6901	26 31 690 100	103	P5735S	34 02 128 000	128	ZG131S	15 52 131 000	66	ZQ8E42S	15 25 740 237	38			
D4AC23	15 50 042 026	88	H6902	26 31 690 200	103	P5735WS	34 02 127 000	128	ZG132S	15 52 132 000	66	ZQ8E44D	15 25 730 431	37			
D4AC24	15 50 042 027	88	H6903	26 31 690 300	102	P5760N	34 02 060 011	126	ZG151S	15 53 151 000	67	ZQ8E44S	15 25 730 432	37			
D4AC25	15 50 042 028	88	KE1212	32 33 012 120	105	P5763N	34 02 060 012	126	ZG161S	15 53 161 000	64	ZQ9E22D	15 25 736 212	38			
D4AC26	15 50 042 029	88	KE1242	32 33 012 420	105	P5763RN	34 02 063 002	126	ZG162S	15 53 162 000	64	ZQ9E24D	15 25 736 412	38			
D4AM21	15 50 044 033	89	KE1282	32 33 012 820	105	P8512	14 51 704 201	25	ZG165S	15 53 165 000	65	ZS2214B	15 31 223 401	54			
D4AM22	15 50 044 034	89	KE4922	32 33 049 220	105	PW56001	21 05 560 010	133	ZG166S	15 53 166 000	65	ZS2214W	15 31 221 401	54			

Item Number	Order Code	page	Item Number	Order Code	page	Item Number	Order Code	page	Item Number	Order Code	page	Item Number	Order Code	page	Item Number	Order Code	page
10 21 230 003	B30234	15	15 25 813 207	Z57311	44	15 50 000 176	DCAW22	93	15 54 112 200	ZGEO44L	71	19 22 940 201	P1422SM	110	31 32 361 330	C3613.3	48
10 24 110 200	B0412L	12	15 25 813 208	Z52311	44	15 50 000 177	DCLW35	96	15 54 112 201	ZGEOCAL	71	19 25 010 000	P0075	116	32 33 012 120	KE1212	105
10 24 114 000	B04114	12	15 25 813 209	Z58311	44	15 50 000 178	DCAW23	94	15 54 181 000	ZIW181R	63	19 25 020 001	P0077PD	116	32 33 012 420	KE1242	105
10 24 118 000	B04138	13	15 31 221 400	ZS2214B	54	15 50 000 180	DCTW26	94	15 54 184 000	ZIW184R	63	19 27 110 034	P5525M	117	32 33 012 820	KE1282	105
10 24 130 100	B04106	13	15 31 221 401	ZS2214W	54	15 50 000 181	DCCW05	95	15 54 191 000	ZIW191R	64	19 28 842 500	P082251	115	32 33 049 220	KE4922	105
10 24 210 200	B0422L	13	15 31 222 400	ZS2224B	54	15 50 000 182	DCLW36	96	15 54 202 000	ZGJ044S	74	19 50 010 207	A1396.3	135	34 01 570 000	P57000TR	127
10 24 214 000	B04214	13	15 31 222 401	ZS2224W	55	15 50 000 183	DCLW37	96	15 54 202 200	ZGJ0B4S	74	19 50 010 208	A1396.4	135	34 01 570 001	P57000T	127
10 24 218 000	B04238	13	15 31 223 400	ZS2234B	55	15 50 000 184	DCTW27	92	15 54 202 201	ZGJ0F4S	74	19 50 730 422	D730422	136	34 01 571 010	P57101	128
10 24 230 100	B04206	14	15 31 223 401	ZS2234W	55	15 50 000 185	DCTW28	97	15 54 204 000	ZGK044S	75	19 50 730 427	D730427	136	34 01 571 020	P57102	128
10 32 126 081	B27186	17	15 31 224 400	ZS2244B	55	15 50 000 186	DCTW29	97	15 54 204 200	ZGK0B4S	75	20 01 151 100	F61590	137	34 02 060 011	P5760N	126
10 32 126 082	B25186	16	15 31 224 401	ZS2244W	55	15 50 000 187	DCTW30	94	15 55 015 000	ZIW15CR	83	20 05 060 900	F6090	138	34 02 060 012	P5763N	126
10 32 226 213	B27216	17	15 31 225 400	ZS2254B	56	15 50 000 188	DCGW16	92	15 55 017 000	ZIW17FR	83	20 05 061 000	F6100	137	34 02 063 002	P5763RN	126
10 32 226 214	B25216	17	15 31 231 400	ZS2314B	56	15 50 000 189	DCTW32	94	15 55 022 000	ZIW22AR	83	20 05 061 100	F6110	138	34 02 127 000	P5735WS	128
10 41 760 014	B30764	16	15 31 231 401	ZS2314W	56	15 50 000 190	DCTW33	97	15 55 034 000	ZCW34BR	83	20 05 062 000	F6200	138	34 02 128 000	P5735SS	128
10 42 202 524	B32254	14	15 31 232 400	ZS2324B	56	15 50 000 191	DCTW31	95	15 55 110 000	ZCW11BR	84	20 05 063 000	F6300	138	34 02 129 000	P57103	127
10 42 203 224	B32324	14	15 31 232 401	ZS2324W	56	15 50 040 041	D4AW21	87	15 55 111 000	ZCW11WR	84	21 01 900 012	P56201BHF	130			
10 42 243 014	B32304	15	15 31 233 400	ZS2334B	57	15 50 040 042	D4AW22	87	15 55 154 000	ZIW154R	84	21 04 106 000	P56503	131			
10 42 245 014	B32854	15	15 31 233 401	ZS2334W	57	15 50 040 043	D4AW23	88	15 55 223 000	ZIW223R	84	21 05 560 010	PW56001	133			
14 39 013 902	P4721	33	15 31 234 400	ZS2344B	57	15 50 040 044	D4AW24	88	15 55 249 000	ZIW249R	84	21 05 562 010	PW56201	132			
14 40 004 908	P3214	27	15 31 234 401	ZS2344W	57	15 50 040 045	D4AW25	88	15 55 269 000	ZIW269R	85	21 05 562 020	PW56202	132			
14 40 013 129	P4716	32	15 31 251 200	ZS2512	50	15 50 040 046	D4AW26	88	15 55 313 000	ZPW313L	81	21 06 000 400	P56601SH	130			
14 40 013 130	P3324	30	15 31 251 300	ZS2513	52	15 50 042 024	D4AC21	88	15 55 426 000	ZIW426R	85	21 07 561 000	P56PR1	131			
14 40 013 102	P4718	32	15 31 252 200	ZS2522	50	15 50 042 025	D4AC22	88	15 55 513 000	ZPW513L	82	21 07 562 000	P56PR2	131			
14 40 833 300	P4717	32	15 31 252 300	ZS2523	52	15 50 042 026	D4AC23	88	16 04 844 112	B50444D	18	21 07 563 000	P56PR3	132			
14 50 000 413	P4720	33	15 31 253 200	ZS2532	50	15 50 042 027	D4AC24	88	16 04 845 114	B53457P	18	21 07 956 100	P56EXT1	132			
14 50 000 440	P4544	28	15 31 253 300	ZS2533	52	15 50 042 028	D4AC25	88	16 11 640 500	B64056Y	19	22 01 017 000	M0016	129			
14 50 000 450	P3118	26	15 31 254 200	ZS2542	51	15 50 042 029	D4AC26	88	16 11 641 000	B6410BE	19	22 01 018 000	M0017	129			
14 50 000 460	P2314	29	15 31 254 300	ZS2543	52	15 50 044 033	D4AM21	89	16 11 641 001	B6410BL	19	22 01 019 000	M0049	129			
14 50 000 470	P4719	33	15 31 255 300	ZS2553	53	15 50 044 034	D4AM22	89	16 11 642 000	B6420B	20	23 09 010 130	S9135	119			
14 50 000 480	P2315	29	15 31 291 200	ZS2912	51	15 50 044 035	D4AM23	89	16 13 055 100	B0551BL	20	23 09 010 140	S9136	118			
14 50 000 490	P2317	29	15 31 291 300	ZS2913	53	15 50 044 036	D4AM24	89	16 13 055 101	B0551GY	20	23 09 010 150	S9137	118			
14 50 000 500	P3215	27	15 31 292 200	ZS2922	51	15 50 044 037	D4AM25	89	16 13 055 102	B0551S	20	23 09 010 160	S9231	120			
14 50 000 510	P2316	30	15 31 292 300	ZS2923	53	15 50 044 038	D4AM26	89	16 13 055 200	B0552RG	21	23 09 110 030	S9223	119			
14 50 000 520	P3120	26	15 31 293 200	ZS2932	51	15 50 050 010	D5AW22	90	16 13 055 201	B0552AG	21	23 09 110 040	S9224	119			
14 50 000 530	P3121	26	15 31 293 300	ZS2933	53	15 50 050 011	D5AW23	90	16 13 055 500	B0555S	21	23 09 110 050	S9225	119			
14 50 000 540	P3122	27	15 31 294 200	ZS2942	51	15 50 050 012	D5AW24	90	16 13 055 501	B0555GY	21	23 09 210 010	S9141	119			
14 50 000 550	P4545	28	15 31 294 300	ZS2943	53	15 50 050 013	D5AW25	90	16 13 055 502	B0555BL	21	23 09 210 020	S9142	120			
14 51 704 201	P8512	25	15 35 247 000	Z73115	45	15 50 052 011	D5AC22	90	16 13 056 000	B0560B	22	23 09 210 030	S9143	120			
14 54 194 000	ZIW194R	63	15 35 248 000	Z73116	45	15 50 052 012	D5AC23	90	16 13 056 100	B0561B	22	23 35 072 210	SM7028BL	121			
14 56 000 190	P3322	31	15 35 249 000	Z73125	45	15 50 052 013	D5AC24	91	17 04 022 600	V01810	22	23 35 072 220	SM7029BL	121			
14 56 000 200	P3323	31	15 35 250 000	Z73126	46	15 50 052 014	D5AC25	91	17 04 022 700	V02815	22	26 03 204 000	E0522	100			
15 25 730 431	Z08E44D	37	15 35 251 000	Z73135	46	15 50 054 012	D5AM22	91	17 04 022 800	V03635	23	26 03 205 000	E6210	100			
15 25 730 432	Z08E44S	37	15 35 252 000	Z73136	46	15 50 054 013	D5AM23	91	17 04 022 900	V02620	23	26 06 180 000	E0531	98			
15 25 731 258	ZF3D52	34	15 38 198 000	Z7631	78	15 50 054 014	D5AM24	91	17 04 023 000	V01620	23	26 06 181 000	E8620	98			
15 25 731 259	ZF1D52	34	15 38 199 000	Z7633	78	15 50 054 015	D5AM27	91	17 04 023 100	V04645	23	26 06 182 000	E8614	99			
15 25 731 261	ZL3F47	39	15 38 200 000	Z7634	78	15 51 021 800	ZPW218R	81	17 04 023 200	V05665	23	26 06 183 000	E8610	99			
15 25 731 262	ZL1F47	39	15 38 200 100	Z7635B	79	15 51 051 800	ZPW518R	81	17 04 023 300	V066120	24	26 18 002 700	E0890	104			
15 25 731 451	ZL6F23	39	15 38 200 200	Z7635W	79	15 51 550 000	ZTV55	82	19 02 010 150	P01301	108	26 18 002 800	E0891	104			
15 25 731 452	ZL3F23	39	15 38 200 300	Z7636W	79	15 51 650 000	ZTV65	82	19 02 010 513	P01305	108	26 31 600 100	H6001	102			
15 25 731 453	ZF3A43	35	15 38 200 400	Z7636B	79	15 51 750 000	ZTV75	83	19 02 020 140	P0211U	106	26 31 600 200	H6002	102			
15 25 731 454	ZF1A43	35	15 38 200 500	Z7637B	79	15 52 112 000	Z6112S	66	19 02 020 141	P0211A	106	26 31 600 400	H6004	101			
15 25 731 455	ZF3D53	35	15 38 200 600	Z7637W	80	15 52 121 000	Z6121S	65	19 02 020 142	P0211E	106	26 31 600 600	H6006	101			
15 25 731 456	ZF1D53	35	15 38 200 700	Z7638B	80	15 52 122 000	Z6122S	65	19 02 020 201	P0212	106	26 31 610 100	H6101	102			
15 25 731 457	ZL3F48	40	15 38 200 800	Z7638W	80	15 52 131 000	Z6131S	66	19 02 020 300	P0213	107	26 31 610 200	H6102	101			
15 25 731 458	ZL1F48	40	15 38 200 900	Z7639	80	15 52 132 000	Z6132S	66	19 02 120 140	P12114	107	26 31 690 100	H6901	102			
15 25 736 212	Z09E22D	38	15 39 084 050	ZM3415	59	15 53 151 000	Z6151S	67	19 02 120 201	P1212	107	26 31 690 100	H6901	103			
15 25 736 412	Z09E24D	38	15 39 084 080	ZM3416	59	15 53 161 000	Z6161S	64	19 02 120 300	P1213	107	26 31 690 200	H6902	103			
15 25 740 236	Z08E42D	38	15 39 084 110	ZM3417	60	15 53 162 000	Z6162S	64	19 02 130 207	P1312FC	107	26 31 690 300	H6903	102			
15 25 740 237	Z08E42S	38	15 39 084 120	ZM3418	60	15 53 165 000	Z6165S	65	19 02 150 309	P1513FC	107	30 10 000 293	H1087	122			
15 25 741 258	ZF3A42	35	15 40 116 900	ZV1163	60	15 54 052 000	Z6166S	65	19 02 330 153	P1311PD	107	30 10 000 294	H1088	122			
15 25 741 259	ZF1A42	36	15 40 117 000	ZV1164	61	15 53 172 000	Z6172S	77	19 02 940 203	P1412SM	108	30 10 002 060	H2060	123			
15 25 743 237	ZF5D42.3	36	15 44 103 644	ZB1624													

Explanatory notes and useful links



Children's safety plugs

This icon in the catalogue refers to the presence of children's safety plugs in outlets of extension cords or surge protections.



E-shop for Business Partners


We have an e-shop for business partners at <https://en.b2b.emos.cz>.
Take advantage of the benefits of online purchasing of our products anywhere you need.



Manuals for Goods

<https://www.emos.eu/download>

Here you can find all manuals for goods we have available, even for items no longer on offer. Manuals can also be downloaded from the product details.



Photometric data

<https://www.emos.eu/download>


Here you can find photometric data for processing lighting projects using software tools such as DIALUX or RELUX.



A/ B/ C/ D

Packaging

- A – retail packaging
- B – number of products in a group packaging
- C – number of products per inner carton
- D – number of products per export carton

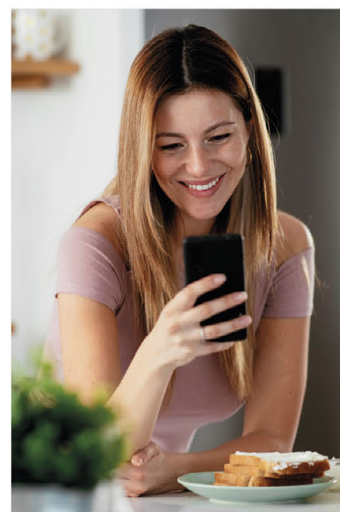

Making Life Easy

EMOS spol. s r.o.
Lipnická 2844
750 02 Prerov
Czech Republic

e-mail: emos@emos.cz
phone: +420 581 261 111

www.emos.eu/en

Y11274

